



Semi-industrial LoRaWAN[®] Gateway

UG65

User Guide



Preface

Thanks for choosing Milesight UG65 LoRaWAN® gateway. UG65 delivers tenacious connection over network with full-featured design such as automated failover/failback, extended operating temperature, hardware watchdog, VPN, Gigabit Ethernet and beyond.

This guide shows you how to configure and operate the UG65 LoRaWAN® gateway. You can refer to it for detailed functionality and gateway configuration.

Readers

This guide is mainly intended for the following users:

- Network Planners
- On-site technical support and maintenance personnel
- Network administrators responsible for network configuration and maintenance

©2011-2026 Xiamen Milesight IoT Co., Ltd.

All rights reserved.

All information in this user guide is protected by copyright law. Whereby, no organization or individual shall copy or reproduce the whole or part of this user guide by any means without written authorization from Xiamen Milesight IoT Co., Ltd.


Related Documents

Document	Description
UG65 Datasheet	Datasheet for UG65 LoRaWAN® gateway.
UG65 Quick Start Guide	Quick Installation Guide for UG65 LoRaWAN® gateway.

Declaration of Conformity

UG65 is in conformity with the essential requirements and other relevant provisions of the CE, FCC, and RoHS.



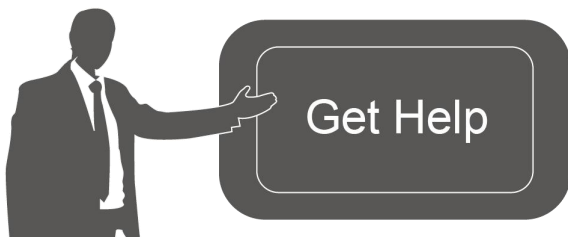

For assistance, please contact
 Milesight technical support:
 Email: iot.support@milesight.com
 Support Portal: support.milesight-iot.com
 Tel: 86-592-5085280
 Fax: 86-592-5023065
 Address: Building C09, Software Park III,
 Xiamen 361024, China

Document Revision History

Date	Doc Version	Description
Aug. 31, 2020	V1.0	Initial version
Dec. 10, 2020	V2.0	Layout replace
Apr. 30, 2021	V2.1	<ol style="list-style-type: none"> 1. Support LoRaWAN® Class B 2. Add Node-RED feature 3. Add Noise-Analyzer feature 4. Add Multicast Group feature 5. Add application examples
Aug. 24, 2021	V2.2	<ol style="list-style-type: none"> 1. Support Yeastar Workplace platform integration 2. Delete Package Forward status page 3. Phone & Email webpage update
Dec. 15, 2021	V2.3	<ol style="list-style-type: none"> 1. Add AS923-3&AS923-4 2. Change network server channel mask box to channel 3. Add device channel setting in profile
Feb. 18, 2022	V2.4	<ol style="list-style-type: none"> 1. Add batch backup 2. Log in webpage update 3. Change default antenna type to external antenna 4. Adjust time of Class C ACK timeout
Jun. 1, 2022	V2.5	<ol style="list-style-type: none"> 1. Support VLAN Trunk client 2. Add System Name in SNMP 3. Add Use L2TP Peer DNS option
Dec.26, 2022	V2.6	<ol style="list-style-type: none"> 1. Add BACnet Server feature 2. Add Payload Codec feature 3. Add Reset and all flows export feature on Node-RED 4. Add data retransmission feature on Packet Forward
Feb. 21, 2024	V2.7	<ol style="list-style-type: none"> 1. Compatible with Milesight Development Platform 2. Update default secondary ICMP and DNS server address 3. Add cellular IMS and custom MTU feature 4. Add 8 pre-set device profiles 5. Add beacon time offset setting

June 7, 2024	V2.8	<ol style="list-style-type: none"> 1. Support to import ovpn file for OpenVPN connection; 2. Support packet filter feature; 3. Add default WLAN connection password; 4. Add username on SMTP client setting; 5. Add BACnet object types, support object instance customization.
Oct. 31, 2024	V 2.9	<ol style="list-style-type: none"> 1. Add WireGuard feature; 2. Add MQTT data re-transmission and retain option; 3. Add metadata option under Application page; 4. Add Node-RED SSL access option; 5. Add BACnet object event detection feature; 6. Add network packet analyzer feature; 7. Compatible with DeviceHub 2.0; 8. Add cellular subnet mask and DNS server customization.
Jan. 8, 2025	V 2.10	<ol style="list-style-type: none"> 1. Add object mapping function on Payload Codec page; 2. Remove BACnet/IP option under Application page; 3. Update BACnet object web GUI; 4. Add Modbus server feature.
April 3, 2025	V 2.11	<ol style="list-style-type: none"> 1. Add FUOTA feature; 2. Add MQTT Last Will Message feature; 3. Update application key options when adding a device; 4. Update metadata option; 5. Update WAN default connection type as DHCP; 6. Update web GUI access steps.
May 29, 2025	V 2.11.1	<ol style="list-style-type: none"> 1. Add device timeout parameter; 2. BACnet server is enabled by default, update default device ID; 3. Change Activated item to Status item on device list; 4. Support adding BACnet global objects; 5. Support automatically adding BACnet object; 6. Expand the max number of BACnet and Modbus object to 10,000; 7. Support adding a independent HTTP API account.
August 13, 2025	V 2.12	<ol style="list-style-type: none"> 1. Add data item on Packet Forwarder-Traffic page' 2. Add page configuration for object mapping function of Custom payload codec; 3. Add ADR option in device profile; 4. Support exporting all device info; 5. Add download queue clear feature on packets page; 6. Add BACnet global object types; 7. Add Modbus global object feature and server ID type.
Dec. 24, 2025	V 2.13	<ol style="list-style-type: none"> 1. Add MQTT configuration via HTTP; 2. Add SSL Secure option for MQTT TLS authentication;

		<ol style="list-style-type: none">3. Add BACnet/SC feature;4. Support bulk importing and selecting all Modbus objects;5. Add HTTP proxy feature;6. Add web password limitation and change prompt;7. Add HTTP API password encrypted feature.
Apr. 15, 2026	V 2.14	<ol style="list-style-type: none">1. Add display the number of agent gateways in Status page;2. Add data retransmission and packet filter limitation when multiple packet forwarders are enabled;3. Optimize noise analyzer parameters;4. Add more MQTT-TLS certificate formats;5. Add more device status when adding to network server, support selecting default values for ABP mode;6. Add details of agent gateways;7. Add 4 default device profiles, remove Class B ACK timeout;8. Add packet download feature;9. Add network interface selection in BACnet/IP mode;10. Change bulk export BACnet objects to all exported;11. Add protocol type in cellular setting;12. Add IPsec DH groups;13. Access service enables local and remote access separately;14. Add HTTP API password limitation.

Contents

Chapter 1 Product Introduction	9
1.1 Overview	9
1.2 Advantages	9
Chapter 2 Access to Web GUI	11
Chapter 3 Web Configuration	14
3.1 Status	14
3.1.1 Overview	14
3.1.2 Cellular	15
3.1.3 Network	17
3.1.4 WLAN	18
3.1.5 VPN	19
3.1.6 Host List	20
3.2 LoRaWAN	21
3.2.1 Packet Forwarder	21
3.2.1.1 General	21
3.2.1.2 Radios	23
3.2.1.3 Noise Analyzer	25
3.2.1.4 Advanced	26
3.2.1.5 Custom	27
3.2.1.6 Traffic	28
3.2.2 Network Server	29
3.2.2.1 General	29
3.2.2.2 Application	31
3.2.2.3 Payload Codec	36
3.2.2.4 Profiles	41
3.2.2.5 Device	44
3.2.2.6 FUOTA	47
3.2.2.7 Multicast Groups	49
3.2.2.8 Gateway Fleet	51
3.2.2.9 Packets	52
3.3 Protocol Integration	55
3.3.1 BACnet Server	55
3.3.1.1 Server	55
3.3.1.2 BACnet Object	58
3.3.2 Modbus Server	62
3.3.2.1 Server	62
3.3.2.2 Modbus Object	64
3.4 Network	66
3.4.1 Interface	66
3.4.1.1 Port	66
3.4.1.2 WLAN	69

3.4.1.3 Cellular (Cellular Version Only)	72
3.4.1.4 Loopback	75
3.4.1.5 VLAN Trunk	76
3.4.2 Firewall	77
3.4.2.1 Security	77
3.4.2.2 ACL	77
3.4.2.4 Port Mapping (DNAT)	79
3.4.2.3 DMZ	80
3.4.2.5 MAC Binding	80
3.4.3 DHCP	81
3.4.4 DDNS	82
3.4.5 Link Failover	82
3.4.5.1 SLA	83
3.4.5.2 Track	83
3.4.5.3 WAN Failover	84
3.4.6 VPN	85
3.4.6.1 DMVPN	85
3.4.6.2 IPsec	87
3.4.6.3 GRE	90
3.4.6.4 L2TP	91
3.4.6.5 PPTP	93
3.4.6.6 OpenVPN Client	94
3.4.6.7 OpenVPN Server	97
3.4.6.8 Certifications	100
3.4.6.9 WireGuard	101
3.4.7 HTTP Proxy	103
3.5 System	104
3.5.1 General Settings	104
3.5.1.1 General	104
3.5.1.2 System Time	105
3.5.1.3 SMTP	105
3.5.1.4 Phone	106
3.5.1.5 Email	107
3.5.2 User Management	107
3.5.2.1 Account	107
3.5.2.2 User Management	108
3.5.2.3 HTTP API Management	109
3.5.3 SNMP	109
3.5.3.1 SNMP	110
3.5.3.2 MIB View	110
3.5.3.3 VACM	111
3.5.3.4 Trap	112
3.5.3.5 MIB	112
3.5.4 Device Management	113

3.5.4.1 Auto Provision	113
3.5.4.2 Management Platform	113
3.5.5 Events	114
3.5.5.1 Events	114
3.5.5.2 Events Settings	115
3.6 Maintenance	116
3.6.1 Tools	116
3.6.1.1 Ping	116
3.6.1.2 Traceroute	116
3.6.1.3 Packet Analyzer	117
3.6.1.4 Qxdmlog	117
3.6.2 Schedule	118
3.6.3 Log	118
3.6.3.1 System Log	118
3.6.3.2 Log Settings	119
3.6.4 Upgrade	119
3.6.5 Backup and Restore	120
3.6.6 Reboot	121
3.7 APP	121
3.7.1 Python	121
3.7.1.1 Python	121
3.7.1.2 App Manager Configuration	122
3.7.1.3 Python App	123
3.7.2 Node-RED	123
3.7.2.1 Node-RED	124
Chapter 4 Application Examples	126
4.1 Restore Factory Defaults	126
4.2 Firmware Upgrade	127
4.3 Network Connection	127
4.3.1 Ethernet Connection	127
4.3.2 Cellular Connection (Cellular Version Only)	129
4.4 Wi-Fi Application Example	130
4.4.1 AP Mode	130
4.4.2 Client Mode	132
4.5 Packet Forwarder Configuration	134
4.6 Network Server Configuration	135
4.6.1 Connect to Milesight IoT Cloud	135
4.6.2 Add End Devices	137
4.6.3 Send Data to Device	141
4.6.4 Connect to HTTP/MQTT Server	143
4.7 Node-RED	145
4.7.1 Start the Node-RED	145
4.7.2 Send Data by Email	146

Chapter 1 Product Introduction

1.1 Overview

UG65 is a robust 8-channel indoor LoRaWAN® gateway. Adopting SX1302 LoRa chip and high-performance quad-core CPU, UG65 supports connection with more than 2000 nodes. UG65 has line of sight up to 15 km and can cover about 2 km in urbanized environment, which is ideally suited to smart office, smart building and many other indoor applications.

UG65 supports not only multiple back-haul backups with Ethernet, Wi-Fi and cellular, but also has integrated mainstream network servers (such as The Things Industries, ChirpStack, etc.) and built-in network server for easy deployment.

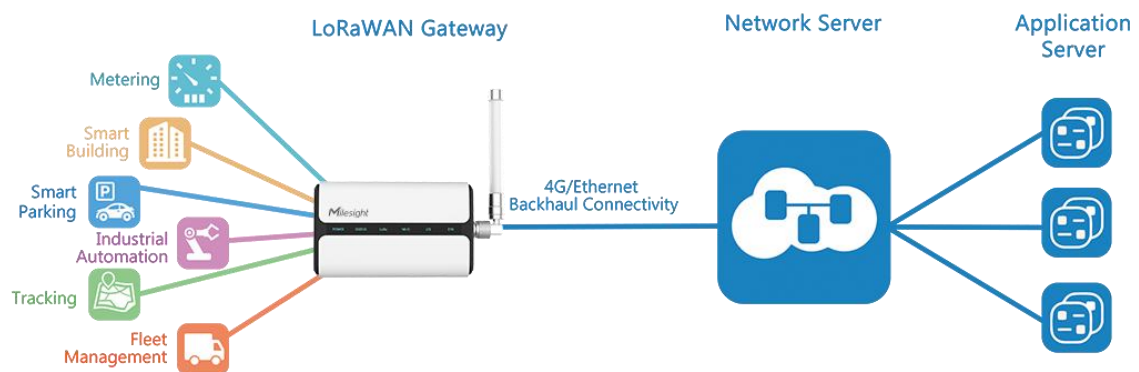


Figure 1-1

1.2 Advantages

Benefits

- Built-in industrial CPU and big memory
- Ethernet, 2.4GHz Wi-Fi and global 2G/3G/LTE options make it easy to get connected
- Embedded network server and compliant with several third party network servers
- MQTT(s) or HTTP(s) protocol for data transmission to application server
- Rugged enclosure, optimized for wall or pole mounting
- 3-year warranty included

Security & Reliability

- Automated failover/failback between Ethernet and Cellular
- Enable unit with security frameworks like
IPsec/OpenVPN/GRE/L2TP/PPTP/DMVPN/WireGuard

- Embedded hardware watchdog to automatically recover from various failures and ensure highest level of availability

Easy Maintenance

- Milesight DeviceHub and Milesight Development Platform provide easy setup, mass configuration, and centralized management of remote devices
- The user-friendly web interface design and various upgrading options help administrator to manage the device as easy as pie
- Web GUI and CLI enable the admin to achieve quick configuration and simple management among a large quantity of devices
- Users can efficiently manage the remote devices on the existing platform through the industrial standard SNMP

Capabilities

- Link remote devices in an environment where communication technologies are constantly changing
- Industrial quad core 64-bit ARM Cortex-A53 processor, high-performance operating up to 1.5 GHz with low power consumption, and 8GB eMMC available to support more applications
- Support wide operating temperature ranging from -40°C to 70°C/-40°F to 158°F

Chapter 2 Access to Web GUI


This chapter explains how to access to Web GUI of the UG65.

Username: **admin**

Password: **password**

Configuration Steps:

1. Enable Wireless Network Connection on your computer and search for access point **Gateway_XXXXXX**(=last 6 digits of WLAN MAC address) to connect it, the default Wi-Fi password is **iotpassword**.
2. Open a Web browser on your PC (Chrome is recommended) and type in the IP address **https://192.168.1.1** to access the web GUI.
3. Enter the username and password, then click "Login".

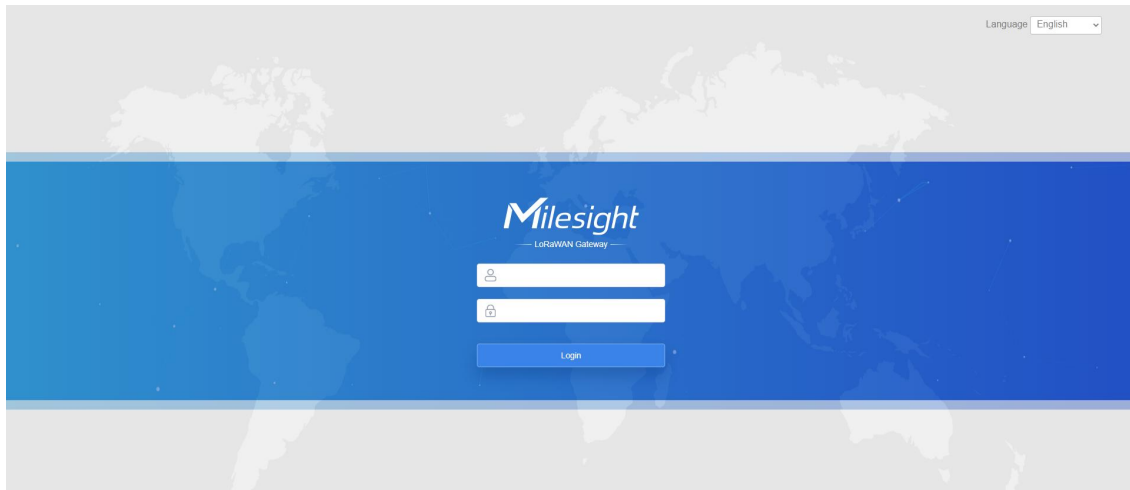

! If you enter the username or password incorrectly more than 5 times, the login page will be locked for 10 minutes.

4. After logging the web GUI, it is necessary to change the web GUI password for the first time. The password must contain at least one letter and one number.

Change Password

The current login password uses the default password. Please change it promptly.

New Password

Confirm New Password

Save Cancel

5. Use the new password to log in to the web GUI again. After logging the web GUI, you can view system information and perform configuration of the gateway.


The screenshot displays the Milesight web GUI interface. The left sidebar contains navigation options: Status, Packet Forwarder, Network Server, Protocol Integration, Network, System, Maintenance, and APP. The main content area is titled 'System Information' and lists various system parameters:

Parameter	Value
Model	UG65-L00E-868M-EA
Region	EU868
Serial Number	6221A4968194
Firmware Version	60.0.0.42-r5
Hardware Version	V1.1
Local Time	2024-02-21 21:49:38 Wednesday
Uptime	01:29:39
CPU Load	5%
RAM (Capacity/Available)	512MB/47MB (9.18%)
eMMC (Capacity/Available)	8.0GB/6.4GB (80.32%)


Below the system information, there is a section for 'UPS' with fields for Model, Serial Number, and Firmware Version, all currently showing dashes. At the bottom right of the main content area, there are 'Manual Refresh' and 'Refresh' buttons. A 'Help' sidebar on the right lists various system information categories like Model, Region, Serial Number, Firmware Version, Hardware Version, Local Time, Uptime, CPU Load, and RAM (Capacity/Available).

Note: For v60.0.0.46 or previous versions, the gateway also supports wired access.

1. Connect PC to UG65 ETH port directly or through PoE injector.
2. Assign the IP address to your computer manually. Take Windows 10 system as an example,
 - A. Go to "Control Panel" → "Network and Internet" → "Network and Sharing Center", then click "Ethernet" (May have different names).

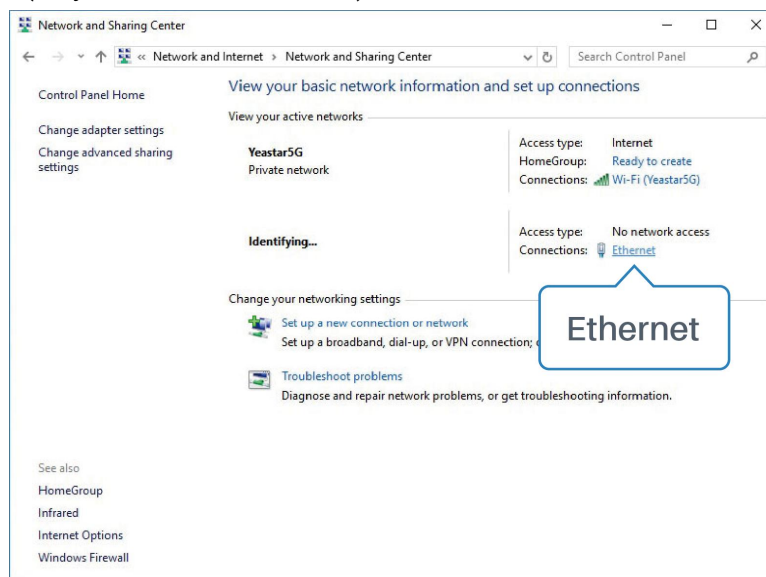

B. Go to "Properties" → "Internet Protocol Version 4(TCP/IPv4)" and select "Use the following IP address", then assign a static IP manually within the same subnet of the gateway.

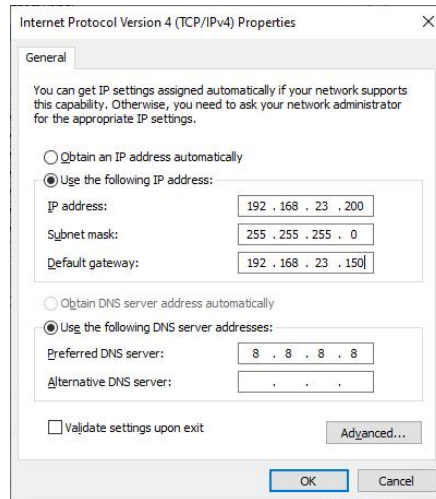

3. Open a Web browser on your PC (Chrome is recommended) and type in the IP address **192.168.23.150** to access the web GUI.

Chapter 3 Web Configuration

3.1 Status

3.1.1 Overview

You can view the system information of the gateway on this page.

System Information	
Model	UG65-L00E-868M-EA
Region	EU868
Serial Number	6221A4968194
Firmware Version	60.0.0.42-r5
Hardware Version	V1.1
Local Time	2024-02-21 21:49:38 Wednesday
Uptime	01:29:39
CPU Load	5%
RAM (Capacity/Available)	512MB/47MB (9.18%)
eMMC (Capacity/Available)	8.0GB/6.4GB (80.32%)

Figure 3-1-1-1

System Information	
Item	Description
Model	Show the model name of gateway.
Region	Show the LoRaWAN [®] used frequency of gateway.
Serial Number	Show the serial number of gateway.
Firmware Version	Show the currently firmware version of gateway.
Hardware Version	Show the currently hardware version of gateway.
Local Time	Show the currently local time of system.
Uptime	Show the information on how long the gateway has been running.
CPU Load	Show the current CPU utilization of the gateway.
RAM (Capacity/Available)	Show the RAM capacity and the available RAM memory.
eMMC (Capacity/Available)	Show the eMMC capacity and the available eMMC memory.

Table 3-1-1-1 System Information

Agent Gateway Status	
Online Status (Online/All)	0/0

Figure 3-1-1-2

Agent Gateway Status	
Item	Description
Online Status (Online/All)	Show the number of online and all agent gateways added by Gateway Fleet feature.

When Milesight UPS is connected to the device, the UPS basic information will also show on the Status page. For more details please refer to *Milesight UPS User Guide*.

UPS	
Model	-
Serial Number	-
Firmware Version	-
Hardware Version	-
Power Status	Unconnected
Remaining Battery	-

Figure 3-1-1-3

3.1.2 Cellular

You can view the cellular network status of gateway on this page.

Modem	
Status	Ready
Model	EC25
Version	EC25ECGAR06A07M1G
Signal Level	26asu (-61dBm)
Register Status	Registered (Home network)
IMEI	860425047368939
IMSI	460019425301842
ICCID	89860117838009934120
ISP	CHN-UNICOM
Network Type	LTE
PLMN ID	
LAC	5922
Cell ID	340db80

Figure 3-1-2-1

Modem Information	
Item	Description
Status	Show the corresponding detection status of module and SIM card.
Model	Show the model name of cellular module.
Version	Show the version of cellular module.
Signal Level	Show the cellular signal level.
Register Status	Show the registration status of SIM card.
IMEI	Show the IMEI of the module.
IMSI	Show IMSI of the SIM card.
ICCID	Show ICCID of the SIM card.
ISP	Show the network provider which the SIM card registers on.
Network Type	Show the connected network type, such as LTE, 3G, etc.
PLMN ID	Show the current PLMN ID, including MCC, MNC, LAC and Cell ID.
LAC	Show the location area code of the SIM card.
Cell ID	Show the Cell ID of the SIM card location.

Table 3-1-2-1 Modem Information

Network	
Status	Connected
IP Address	10.53.241.18
Netmask	255.255.255.252
Gateway	10.53.241.17
DNS	218.104.128.106
Connection Duration	0 days, 00:04:26

Figure 3-1-2-2

Network Status	
Item	Description
Status	Show the connection status of cellular network.
IP Address	Show the IP address of cellular network.
Netmask	Show the netmask of cellular network.
Gateway	Show the gateway of cellular network.
DNS	Show the DNS of cellular network.
Connection Duration	Show information on how long the cellular network has been connected.

Table 3-1-2-2 Network Status

3.1.3 Network

On this page you can check the Ethernet port status of the gateway.

WAN							
Port	Status	Type	IP Address	Netmask	Gateway	DNS	Duration
eth 0	up	Static	192.168.22.32	255.255.254.0	192.168.22.1	8.8.8.8	10h 52m 03s

Figure 3-1-3-1

Network	
Item	Description
Port	Show the name of the Ethernet port.
Status	Show the status of the Ethernet port. "Up" refers to a status that WAN is enabled and Ethernet cable is connected. "Down" means Ethernet cable is disconnected or WAN function is disabled.
Type	Show the dial-up type of the Ethernet port.
IP Address	Show the IP address of the Ethernet port.
Netmask	Show the netmask of the Ethernet port.
Gateway	Show the gateway of the Ethernet port.
DNS	Show the DNS of the Ethernet port.

Duration	Show the information about how long the Ethernet cable has been connected to the Ethernet port when the port is enabled. Once the port is disabled or Ethernet cable is disconnected, the duration will stop.
----------	---

Table 3-1-3-1 WAN Status

3.1.4 WLAN

You can check Wi-Fi status on this page, including the information of access point and client.

WLAN Status	
Wireless Status	Enabled
MAC Address	24:e1:24:f1:22:58
Interface Type	AP
SSID	Gateway_F12258
Channel	Auto
Encryption Type	No Encryption
Status	Up
IP Address	192.168.1.1
Netmask	255.255.255.0
Connection Duration	0 days, 10:52:23

Figure 3-1-4-1

WLAN Status	
Item	Description
Wireless Status	Show the wireless status.
MAC Address	Show the MAC address.
Interface Type	Show the interface type, such as "AP" or "Client".
SSID	Show the SSID.
Channel	Show the wireless channel.
Encryption Type	Show the encryption type.
Status	Show the connection status.
IP Address	Show the IP address of the gateway.
Netmask	Show the wireless MAC address of the gateway.
Gateway	Show the gateway address in wireless network.
Connection Duration	Show information on how long the Wi-Fi network has been connected.

Table 3-1-4-1 WLAN Status

Associated Stations		
IP Address	MAC Address	Connection Duration

Figure 3-1-4-2

Associated Stations

Item	Description
IP Address	Show the IP address of access point or client.
MAC Address	Show the MAC address of the access point or client.
Connection Duration	Show information on how long the Wi-Fi network has been connected.

Table 3-1-4-2 WLAN Status

3.1.5 VPN

You can check VPN status on this page, including PPTP, L2TP, IPsec, OpenVPN and DMVPN.

PPTP Tunnel				
Name	Status	Local IP	Remote IP	
pptp_1	Disconnected	-	-	
pptp_2	Disconnected	-	-	
pptp_3	Disconnected	-	-	

L2TP Tunnel				
Name	Status	Local IP	Remote IP	
l2tp_1	Disconnected	-	-	
l2tp_2	Disconnected	-	-	
l2tp_3	Disconnected	-	-	

Figure 3-1-5-1

IPsec Tunnel				
Name	Status	Local IP	Remote IP	
ipsec_1	Disconnected	-	-	
ipsec_2	Disconnected	-	-	
ipsec_3	Disconnected	-	-	

OpenVPN Client				
Name	Status	Local IP	Remote IP	
openvpn_1	Disconnected	-	-	
openvpn_2	Disconnected	-	-	
openvpn_3	Disconnected	-	-	

Figure 3-1-5-2

GRE Tunnel			
Name	Status	Local IP	Remote IP
gre_1	Disconnected	-	-
gre_2	Disconnected	-	-
gre_3	Disconnected	-	-

DMVPN Tunnel			
Name	Status	Local IP	Remote IP
dmpvpn	Disconnected	-	-

Figure 3-1-5-3

VPN Status	
Item	Description
Name	Show the name of the VPN tunnel.
Status	Show the status of the VPN tunnel.
Local IP	Show the local tunnel IP of VPN tunnel.
Remote IP	Show the remote tunnel IP of VPN tunnel.

Table 3-1-5-1 VPN Status

3.1.6 Host List

You can view the host information on this page.

DHCP Leases		
IP	MAC	Lease Remaining Time


MAC Binding	
IP	MAC

Figure 3-1-6-1

Host List	
Item	Description
DHCP Leases	
IP Address	Show IP address of DHCP client
MAC Address	Show MAC address of DHCP client
Lease Time Remaining	Show the remaining lease time of DHCP client.
MAC Binding	
IP & MAC	Show the IP address and MAC address set in the Static IP list of DHCP service.

Table 3-1-6-1 Host List Description

3.2 LoRaWAN

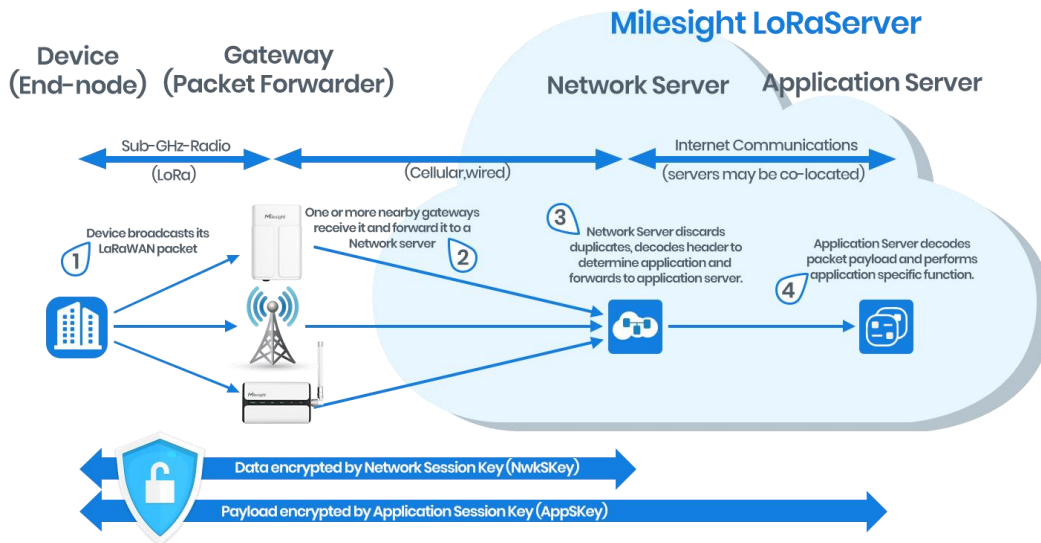

3.2.1 Packet Forwarder

3.2.1.1 General

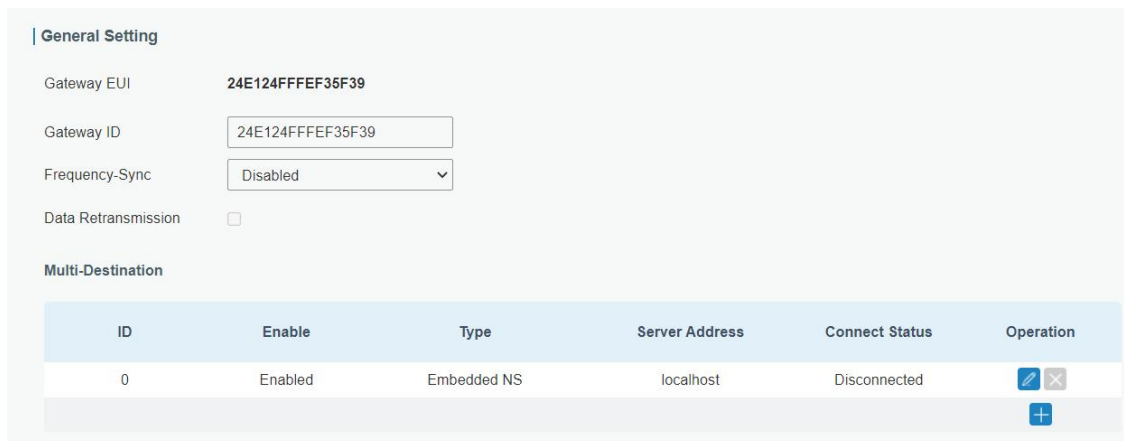


Figure 3-2-1-1

General Settings	
Item	Description
Gateway EUI	Show the unique identifier of the gateway and it's non-editable. Format: ETH port MAC address + "FFFE" in the middle
Gateway ID	Fill in the corresponding ID which you've used for registering the gateway to the remote network server. It is usually the same as gateway EUI and can be changed.
Frequency-Sync	Sync frequency configurations from the network server by selecting the corresponding multi-destination ID.

Data Retransmission	<p>When enabled, it supports storing up to 1 million data items when the network is disconnected and retransmits them after network recovery.</p> <p>Note:</p> <p>1) If only one destination is enabled, only Chirpstack, Semtech, Embedded NS, Remote Embedded NS, and Basic Station type package forwarder are supported;</p> <p>2) If more than one destination is enabled, only Semtech packet forwarders or Semtech + Embedded NS are supported.</p>
Multi-Destination	The gateway will forward the data to the network server address that was created and enabled in the list.
Connection Status	Show the connection status of the package forwarder.

Table 3-2-1-1 General Setting Parameters

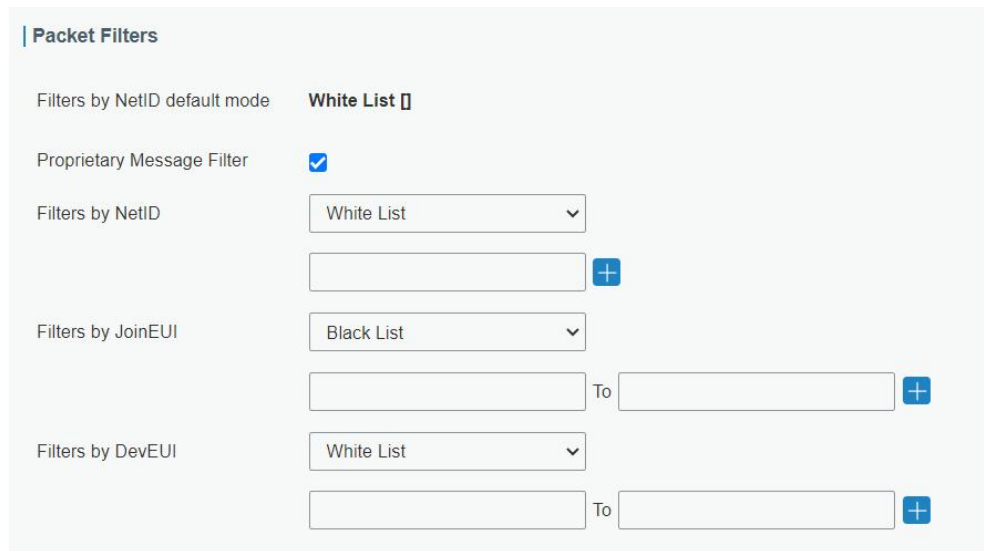


Figure 3-2-1-2

Packet Filters	
Parameters	Description
Filters by NetID Default Mode	<p>Select the filter mode as blacklist or whitelist.</p> <p>White List: Only forward the packets on this list to the network server.</p> <p>Black List: Only forward the packets except this list to the network server.</p>
Proprietary Message Filter	Enable to drop the proprietary message packets (Mtype=111).
Filters by NetID	Forward or drop the uplink packets that match the NetID.
Filters by JoinEUI	Forward or drop the join request packets that match the JoinEUI range.

Filters by DevEUI	Forward or drop the join request packets that match the DevEUI range.
List	Set the specific filtering value or range list. Every condition supports a maximum of 5 lists.

Table 3-2-1-2 Packet Filters Parameters

Note:

1. When join EUI and dev EUI are both configured, only packets that match both conditions will be forwarded.
2. If only one destination is enabled, this feature is not supported for Lorient or Everynet type packet forwarder.
3. If more than one destination is enabled, only Semtech packet forwarders or Semtech + Embedded NS are supported for this feature.
4. When a third-party network server assigns filter condition to gateway, the gateway will use network server settings in priority.

Related Configuration Example

[Packet forwarder configuration](#)

3.2.1.2 Radios

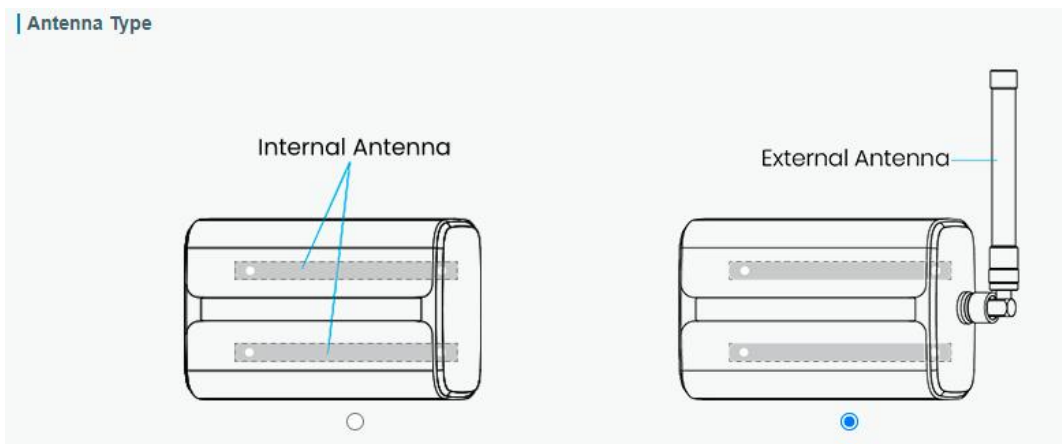


Figure 3-2-1-3

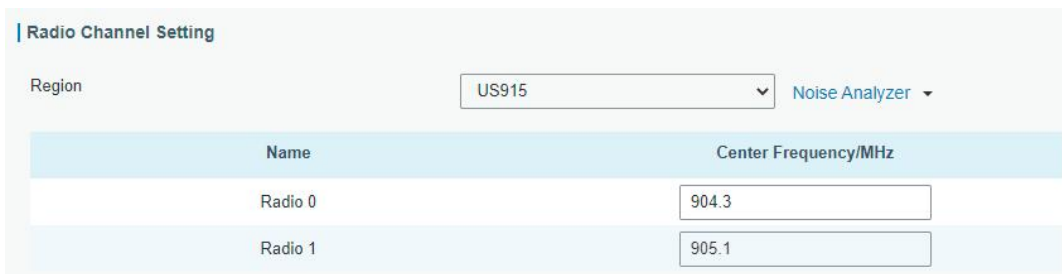


Figure 3-2-1-4

Radios-Radio Channel Setting	
Item	Description
Antenna	Select the transmission type of antennas when using EA version.

Type	Note: Some sub-models do not support this feature, please refer to corresponding datasheets.
Region	Choose the LoRaWAN® frequency plan for upstream and downstream frequencies and data rates. Available channel plans depend on the gateway's model.
Center Frequency	Change the frequencies to receive packets from LoRaWAN® nodes.

Table 3-2-1-3 Radio Channels Setting Parameters

Multi Channels Setting			
Enable	Index	Radio	Frequency/MHz
<input checked="" type="checkbox"/>	0	Radio 0	923.2
<input checked="" type="checkbox"/>	1	Radio 0	923.4
<input checked="" type="checkbox"/>	2	Radio 0	923.6
<input checked="" type="checkbox"/>	3	Radio 1	922.2
<input checked="" type="checkbox"/>	4	Radio 1	922.4
<input checked="" type="checkbox"/>	5	Radio 1	922.6
<input checked="" type="checkbox"/>	6	Radio 1	922.8
<input checked="" type="checkbox"/>	7	Radio 1	923.0

Figure 3-2-1-5

Radios-Multi Channel Setting	
Item	Description
Enable	Click to enable this channel to transmit packets.
Index	Indicate the ordinal of the list.
Radio	Choose Radio 0 or Radio 1 as center frequency.
Frequency/MHz	Enter the frequency of this channel. Range: center frequency ± 0.4625 .

Table 3-2-1-4 Multi Channel Setting Parameters

LoRa Channel Setting				
Enable	Radio	Frequency/MHz	Bandwidth/KHz	Spread Factor
<input checked="" type="checkbox"/>	Radio 0	923.8	250KHZ	SF7

Figure 3-2-1-6

Radios-LoRa Channel Setting	
Item	Description
Enable	Click to enable this channel to transmit packets.
Radio	Choose Radio 0 or Radio 1 as center frequency.
Frequency/MHz	Enter the frequency of this channel. Range: center frequency ± 0.9 .
Bandwidth/MHz	Enter the bandwidth of this channel.
Spread Factor	Choose the selectable spreading factor. The channel with large spreading factor corresponds to a low rate, while the small one corresponds to a high rate.

Table 3-2-1-5 LoRa Channel Setting Parameters

Enable	Radio	Frequency/MHz	Bandwidth/KHz	DataRate
<input checked="" type="checkbox"/>	Radio 0	924.0	125KHZ	50000

Figure 3-2-1-7

Radios-FSK Channel Setting	
Item	Description
Enable	Click to enable this channel to transmit packets.
Radio	Choose Radio 0 or Radio 1 as center frequency.
Frequency/MHz	Enter the frequency of this channel. Range: center frequency±0.9.
Bandwidth/MHz	Enter the bandwidth of this channel. Recommended value: 125KHz, 250KHz, 500KHz
Data Rate	Enter the data rate. Range: 500-25000.

Table 3-2-1-6 FSK Channel Setting Parameters

3.2.1.3 Noise Analyzer

Noise analyzer is used for sweeping the noise of every frequency channel and providing a graph for users to analyze the environment interference condition and select the optimal deployment. RSSI indicates the sensitivity for every channel. **It's not suggested to enable this feature when using package forwarder since it will affect the downlink transmission.**

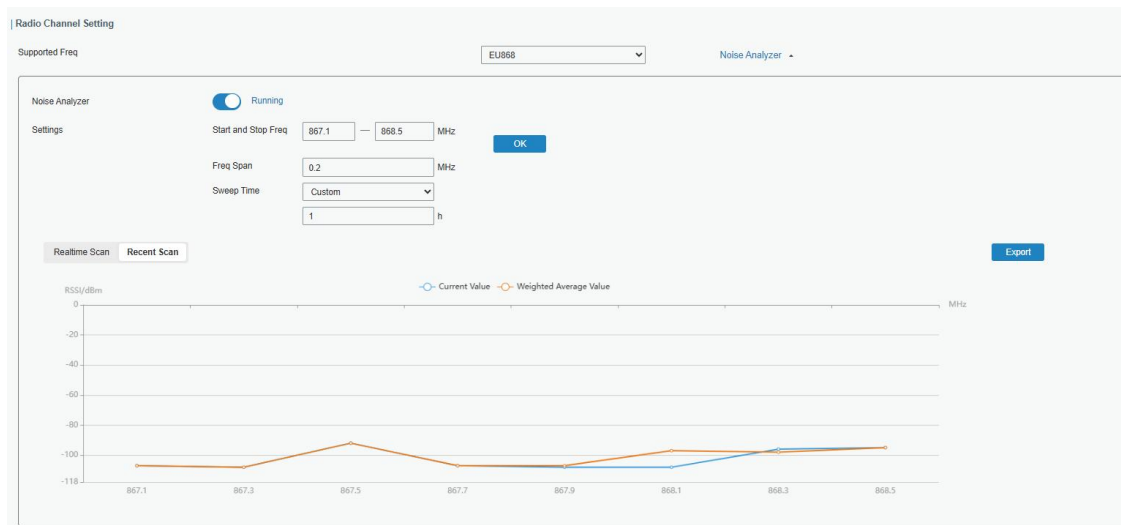


Figure 3-2-1-8

Noise Analyzer	
Item	Description
Enable	Click to enable noise analyzer feature.
Start and Stop Freq	Configure the frequency range to scan.
Freq Span	Configure the step for each frequency channel to be scanned.
Sweep Time	Custom the time to sweep the frequencies. Range: 1-24h Note: To ensure the accurate result, it is recommended to set the

	sweep time as 24 h.
Realtime Scan	Display the scan result in real-time. Lower the RSSI value, better the signal.
Recent Scan	Display the last scan result. The result can be exported to a CSV file.

Table 3-2-1-7 Noise Analyzer Setting Parameters

3.2.1.4 Advanced

This section is about settings in details of beacon transmitting and validating.

Beacon Setting

Beacon Period	<input type="text" value="128"/>	s
Beacon Freq	<input type="text" value="869525000"/>	Hz
Beacon Datarate	<input type="text" value="SF9"/>	
Beacon Channel Number	<input type="text" value="1"/>	
Beacon Freq Step	<input type="text" value="200000"/>	Hz
Beacon Bandwidth	<input type="text" value="125000"/>	Hz
Beacon TX Power	<input type="text" value="16"/>	dBm
Beacon Time Offset	<input type="text" value="0"/>	s

Figure 3-2-1-9

Advanced-Beacon Setting		
Item	Description	Default
Beacon Period	Interval at which the gateway sends beacons for Class B device time synchronization. 0 means the gateway will not send beacons.	0
Beacon Freq	The frequency of beacons.	Based on the supported frequency
Beacon Datarate	The datarate of beacons.	Based on the supported frequency
Beacon Channel Number	When selecting Custom, it allows users to custom range from 1 to 8.	1
Beacon Freq Step	Frequency interval of beacons.	200000
Beacon Bandwidth	The bandwidth of beacons. Unit: Hz	12500 Hz
Beacon TX Power	The TX power of beacons.	Based on the supported

		frequency
Beacon Time Offset	Add this offset to the system time and assign the resulting time to class B devices. This can avoid the interference when multiple class B devices are close.	0

Table 3-2-1-8 Advanced-Beacon Parameters

The screenshot shows a configuration interface with two sections:

- Intervals Setting:**
 - Keep Alive Interval: 10 s
 - Stat Interval: 30 s
 - Push Timeout: 100 ms
- Forward CRC Setting:**
 - Forward CRC Disabled:
 - Forward CRC Error:
 - Forward CRC Valid:

Figure 3-2-1-10

Item	Description	Default
Keep Alive Interval	Enter the interval of keepalive packet which is sent from gateway to network server to keep the connection stable and alive. Range: 1-3600.	10
Stat Interval	Enter the interval to update the network server with gateway statistics. Range: 1-3600.	30
Push Timeout	Enter the timeout to wait for the response from server after the gateway sends data of node. Rang: 1-1999.	100
Forward CRC Disabled	Enable to send packets received with CRC disabled to the network server.	Disabled
Forward CRC Error	Enable to send packets received with CRC errors to the network server.	Disabled
Forward CRC Valid	Enable to send packets received with CRC valid to the network server.	Enabled

Table 3-2-1-9 Advanced Parameters

3.2.1.5 Custom

When Custom Configuration mode is enabled, you can write your own packet forwarder configuration file in the edit box to configure packet forwarder. Click "Save" to save your custom configuration file content, and click "Apply" to take effect. You can click "Clear" to erase all content in the edit box. If you don't know how to write configuration file, please

click "Example" to go to reference page.

Note: customized configuration will overwrite the packet forward configurations of web GUI.



Figure 3-2-1-11

3.2.1.6 Traffic

When navigating to the traffic page, any recent traffic received by the gateway will display. To watch live traffic, click **Refresh**.

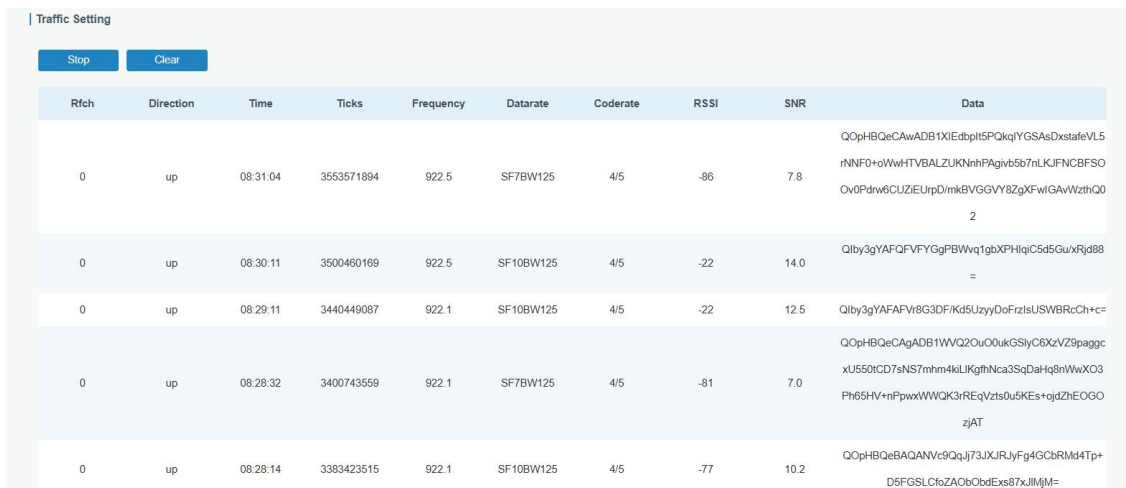


Figure 3-2-1-12


Item	Description
Refresh	Click to obtain the latest data.
Clear	Click to clear all data.
Rfch	Show the channel of this packet.
Direction	Show the direction of this packet.
Time	Show the receiving time of this packet.

Ticks	Show the ticks of this packet.
Frequency	Show the frequency of the channel.
Datarate	Show the datarate of the channel.
Coderate	Show the coderate of this packet.
RSSI	Show the received signal strength.
SNR	Show the signal-to-noise ratio of this packet.
Data	Show the payload (base64) of this packet. Note: This does not work with Lorient and Activity packet forwarders.

Table 3-2-1-10 Traffic Parameters

3.2.2 Network Server

3.2.2.1 General

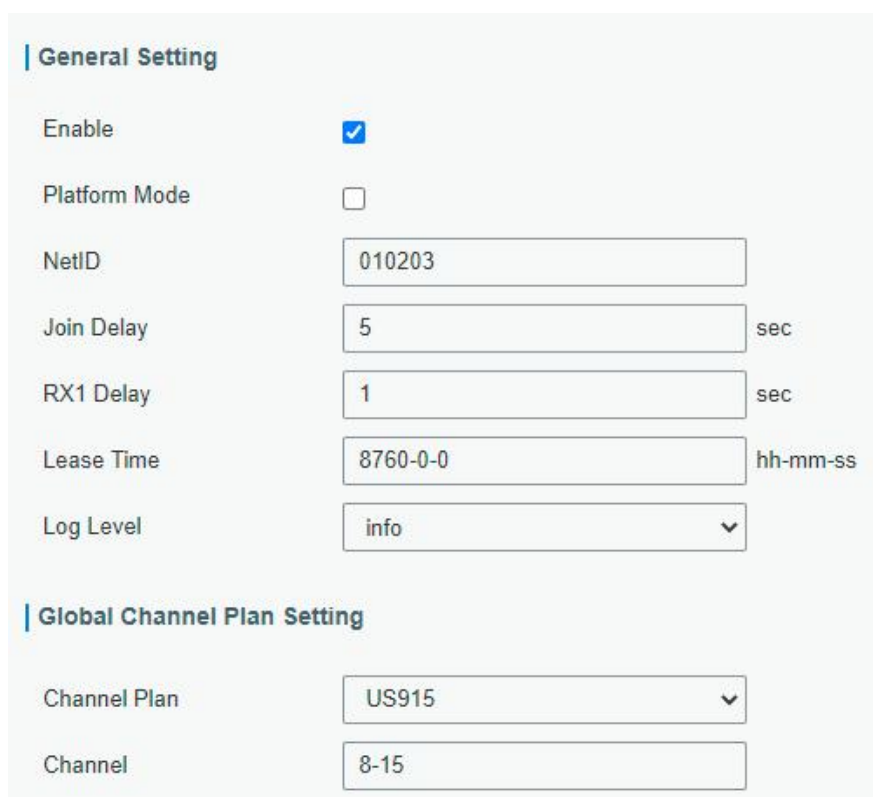

General Setting

Enable

Platform Mode

NetID

Join Delay sec

RX1 Delay sec

Lease Time hh-mm-ss

Log Level

Global Channel Plan Setting

Channel Plan

Channel

Figure 3-2-2-1

Item	Description	Default
General Setting		
Enable	Click to enable Network Server mode.	Enabled
Platform Mode	Enabled to connect gateway to Milesight IoT Cloud or Yeastar Workplace platform .	Disabled
NetID	Enter the network identifier.	010203
Join Delay	Enter the interval time between when the end-device sends a Join_request_message to network server and when the end-device prepares to open RX1 to receive the Join_accept_message	5

	sent from network server.	
RX1 Delay	Enter the interval time between when the end-device sends uplink packets and when the end-device prepares to open RX1 to receive the downlink packet.	1
Lease Time	Enter the amount of time till a successful join expires. The format is hours-minutes-seconds. If the join-type is OTAA, then the end-devices need to join the network server again when it exceeds the lease time.	876000-00-00
Log level	Choose the log level.	Info
Channel Plan Setting		
Channel Plan	Choose LoRaWAN® channel plan used for the upstream and downlink frequencies and datarates. Available channel plans depend on the gateway's model.	Depend on the gateway's frequency
Channel	<p>Allow end devices to communicate with specific frequency channels.</p> <p>Leave it blank means using all the default standard usable channels specified in the LoRaWAN® regional parameters document. It allows to enter the index of the channels.</p> <p>Examples:</p> <p>1, 40: Enabling Channel 1 and Channel 40</p> <p>1-40: Enabling Channel 1 to Channel 40</p> <p>1-40, 60: Enabling Channel 1 to Channel 40 and Channel 60</p>	Depend on the gateway's frequency

Table 3-2-2-1 General Parameters

Note: For some regional variants, if allowed by your LoRaWAN® region, you can use Additional Plan to configure additional channels undefined by the LoRaWAN® Regional Parameters, like EU868 and KR920, as the following picture shows:

Frequency(MHz)	Min Datarate	Max Datarate	Operation
			+

Figure 3-2-2-2

Additional Channels	
Item	Description
Frequency/MHz	Enter the frequency of the additional plan.
Max Datarate	Enter the max datarate for the end-device. The range is based on what is specified in the LoRaWAN® regional parameters document.

Min Datarate	Enter the min datarate for the end-device. The range is based on what is specified in the LoRaWAN® regional parameters document.
--------------	--

Table 3-2-2-2 Additional Plan Parameters

3.2.2.2 Application

An application is a collection of devices with the same purpose or of the same type. Users can add a series of devices to the same application which needs to send to the same server.

You can edit the application by clicking  or create a new application by clicking .

Figure 3-2-2-3

Application	
Item	Description
Name	Enter the name of the application profile. E.g: smoker-sensor-app.
Description	Enter the description of this application. E.g: an application for smoker sensor.
Metadata	Enable to select the details to report with uplink packets automatically when the device adds the payload codec.
Data Transmission	Data will be sent to your custom server using the MQTT, HTTP or HTTPS protocol. One application can only add one MQTT transmission and one HTTP (HTTPS) transmission.


Table 3-2-2-3 Application Parameters

MQTT Integration

Figure 3-2-2-4

MQTT Settings	
Item	Description
Type	Select the type as MQTT.
Configuration Mode	Select the configuration mode. Manual Configuration: Configure the parameters via webpage. Get via HTTP: Send HTTP request to platform to get MQTT configuration parameters.
Status	Display MQTT connection status.
Get via HTTP	
Platform URL	Select the platform URL to send the HTTP request.
Custom Format	Customize the HTTP request content sent to the platform.

Table 3-2-2-4 MQTT Settings Parameters

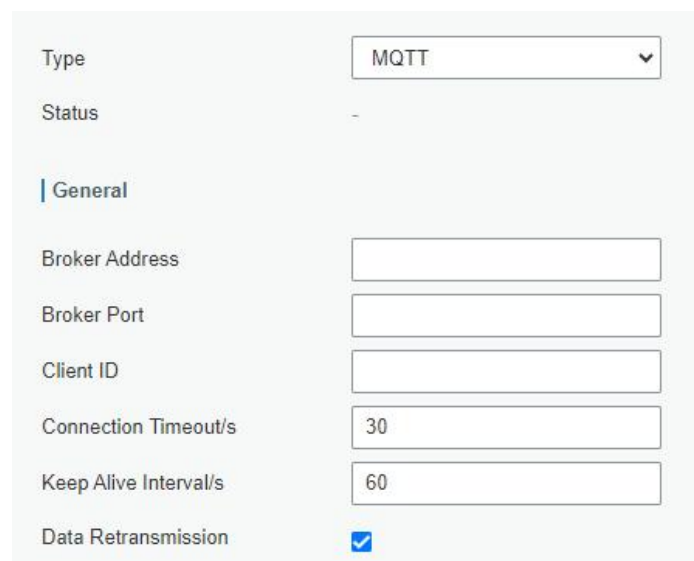

The image shows a configuration interface for MQTT settings. It includes a dropdown menu for 'Type' set to 'MQTT', a 'Status' field with a hyphen, a 'General' section header, and several input fields: 'Broker Address', 'Broker Port', 'Client ID', 'Connection Timeout/s' (set to 30), 'Keep Alive Interval/s' (set to 60), and a checked checkbox for 'Data Retransmission'.

Figure 3-2-2-5

User Credentials

Enable

Username

Password

TLS

Enable

Mode

SSL Secure

Will

Enable

Will Topic

Will QoS

Will Retain

Will Message

Figure 3-2-2-6

Topic

Data Type	topic	Retain	QoS
Uplink data	<input type="text"/>	<input type="checkbox"/>	<input type="text" value="QoS 0"/>
Downlink data	<input type="text"/>	<input type="checkbox"/>	<input type="text" value="QoS 0"/>
Multicast downlink data	<input type="text"/>	<input type="checkbox"/>	<input type="text" value="QoS 0"/>
Join notification	<input type="text"/>	<input type="checkbox"/>	<input type="text" value="QoS 0"/>
ACK notification	<input type="text"/>	<input type="checkbox"/>	<input type="text" value="QoS 0"/>
Error notification	<input type="text"/>	<input type="checkbox"/>	<input type="text" value="QoS 0"/>
Request data	<input type="text"/>	<input type="checkbox"/>	<input type="text" value="QoS 0"/>
Response data	<input type="text"/>	<input type="checkbox"/>	<input type="text" value="QoS 0"/>

Figure 3-2-2-7

MQTT Settings - Manual Configuration	
Item	Description
General	
Broker Address	MQTT broker address to receive data.
Broker Port	MQTT broker port to receive data.
Client ID	Client ID is the unique identity of the client to the server. It must be unique when multiple clients are connected to the same server, and it is essential for handling messages at QoS 1 and 2.
Connection Timeout/s	If the client does not get a response after the connection timeout, the connection will be considered as broken. The Range: 1-65535.
Keep Alive	After the client is connected to the server, the client will send heartbeat

Interval/s	packet to the server regularly to keep alive. Range: 1-65535.
Data Retransmission	After enabled, it supports data storage of up to 10,000 pieces of data when the network is disconnected and re-transmits the data after network recovery.
User Credentials	
Enable	Enable user credentials.
Username	The username used for connecting to the MQTT broker.
Password	The password used for connecting to the MQTT broker.
TLS	
Enable	Enable the TLS encryption in MQTT communication. Note: if MQTT broker type is HiveMQ, please enable TLS and set the option as CA signed server certificate .
Mode	Select from "Self signed certificates", "CA signed server certificate". CA signed server certificate: verify with the certificate issued by Certificate Authority (CA) that pre-loaded on the device. Self signed certificates: upload the custom CA certificates(.cer, .crt or .pem), client Certificates(.cer, .crt, or .pem) and secret key(.key or .pem) for verification.
SSL Secure	After enabled, the gateway will verify the certificate's validity.
Will	
Enable	Last will message is automatically sent when the MQTT client is abnormally disconnected. It is usually used to send device status information or inform other devices or proxy servers of the device's offline status.
Will Topic	Customize the topic to receive last will messages.
Will QoS	QoS0, QoS1 or QoS2 are optional.
Will Retain	Enable to set last will message as retain message.
Will Message	Customize the last will message contents.
Topic	
Data Type	Data type to communicate with MQTT broker: Uplink Data: receive device uplink packets. Downlink Data: send downlink commands to devices. If you require to send downlink command to a single device, please add the wildcard "\$deveui" to this topic and replace this as real device EUI when subscribing this topic. Multicast Downlink Data: send downlink commands to multicast group Join Notification: receive join notifications if the gateway sends join accept packets to allow the devices to join the network. ACK Notification: receive ACK packets from devices when sending downlink commands. Error Notification: receive error packets from devices. Request data: send requests to enquire and configure the gateway NS. Response data: receive the request responses.

Topic	Topic name of the data type used for publishing.
Retain	Enable to set the latest message of this topic as retain message.
QoS	<p>QoS 0 – Only Once This is the fastest method and requires only one message. However, It is the least reliable mode.</p> <p>QoS 1 – At Least Once This level guarantees that the message will be delivered at least once, but may be delivered more than once.</p> <p>QoS 2 – Exactly Once QoS 2 is the highest level of service in MQTT. This level guarantees that each message is received only once by the intended recipients. QoS 2 is the safest and slowest quality of service level.</p>

Table 3-2-2-5 MQTT Settings - Manual Configuration Parameters

HTTP/HTTPS Integration

HTTP Header

Header Name	Header Value	Operation
		+

URL

Data Type	URL
Uplink data	<input type="text"/>
Join notification	<input type="text"/>
ACK notification	<input type="text"/>
Error notification	<input type="text"/>

Figure 3-2-2-8

HTTP/HTTPS Settings	
Item	Description
HTTP Header	
Header Name	A core set of fields in the HTTP header.
Header Value	Value of the HTTP header.
URL	
Data Type	<p>Data type sent to HTTP/HTTPS server.</p> <p>Uplink Data: receive device uplink packets</p> <p>Join Notification: receive join notifications if the gateway sends join accept packets to allow the devices to join the network</p>

	ACK Notification: receive ACK packets from devices when sending downlink commands Error Notification: receive error packets from devices
Topic	Topic name of the data type used for publishing.
URL	HTTP/HTTPS server URL to receive data.

Table 3-2-2-6 HTTP/HTTPS Settings Parameters

Related Configuration Example

[Application configuration](#)

3.2.2.3 Payload Codec

Payload Codec provides the inbuilt payload codec library of Milesight LoRaWAN® devices to decode and encode the data easily. Users can also customize the payload codec of other brands of devices or adjust the uplink and downlink contents as requirements.

Inbuilt Payload Codec Library

Name	Payload Decoder Function	Payload Encoder Function	Object Mapping Function	Details
AM102	✓	✓	✓	ⓘ
AM102L	✓	✓	✓	ⓘ
AM103	✓	✓	✓	ⓘ
AM103L	✓	✓	✓	ⓘ
AM104	✓	✓	✓	ⓘ
AM107	✓	✓	✓	ⓘ
AM307	✓	✓	✓	ⓘ
AM307L	✓	✓	✓	ⓘ
AM308	✓	✓	✓	ⓘ
AM308L	✓	✓	✓	ⓘ

Figure 3-2-2-9

Inbuilt Payload Codec Library	
Item	Description
Library Version	Show the version of the Milesight device payload codec library.
Obtaining Type	Select the type to update the Milesight devices payload codec library. Online: update automatically if gateway detects there is version update every time gateway powers on and accesses the Internet. Users can also click Obtain button to check update status manually. Local Upload: click Browse to upload the zip format payload codec package and click Import to update the library. For Milesight payload codec package, please download here .
Name	Show the corresponding Milesight product model of the payload

	codec.
Payload Decoder Function	Show if decoders exist.
Payload Encoder Function	Show if encoders exist.
Object Mapping Function	Show if object mapping functions exist.
Details	Show the details of decoder and encoder. If this does not meet your requirement, please customize your payload codec.

Table 3-2-2-7 Inbuilt Payload Codec Library Parameters

Custom Payload Codec

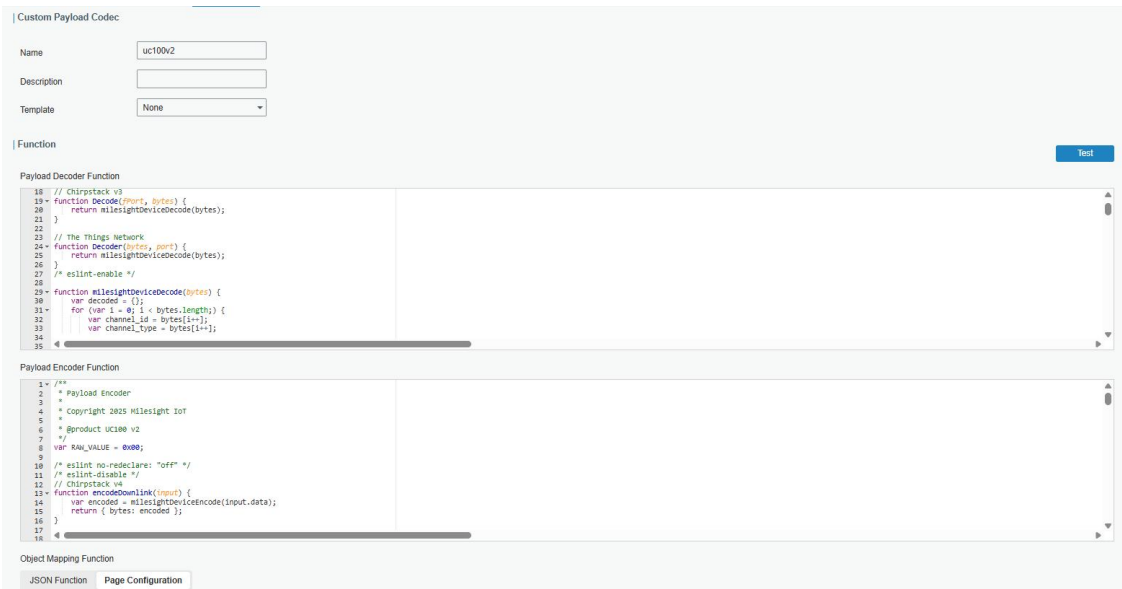


Figure 3-2-2-10

Custom Payload Codec	
Item	Description
Name	Enter the unique name of the custom payload codec.
Description	Enter the description of this payload codec.
Template	Select an existing inbuilt payload codec as a template.
Payload Decoder Function	Customize the device payload decoder to convert hex format data to JSON format. Note that the function header should be the same as the example on the blanks.
Payload Encoder Function	Customize the device payload encoder to convert JSON format message to hex format command. Note that the function header should be the same as the example on the blanks.
Object Mapping Function	Customize the mapping function to convert LoRaWAN® message to BACnet or Modbus objects. It provides two adding methods: JSON Function: Add the function as JSON format. Page Configuration: Add the function via page.

Test	<p>Enable or disable payload codec test.</p> <p>Input: Enter the hex format raw data without blank spaces, or JSON format command.</p> <p>fPort: Application port of LoRaWAN® devices. It's 85 by default for Milesight devices.</p> <p>Decoder Test: Convert hex format raw data to json format result.</p> <p>Encoder Test: Convert JSON format command to hex format command.</p> <p>Decoder/Encoder Test Result: Display decoded or encoded result.</p> <p>Object Mapping Test Result: Check the object validity in the encoder or decoder.</p>
------	---

Table 3-2-2-8 Custom Payload Codec Parameters

Note:

1. The supported JavaScript version of payload decoder and encoder is ES2020.
2. The variable names used in decoders and encoders of one Payload Codec must be the same if they point to the same items.

```
{
  "object": [
    {
      "id": "ipso_version",
      "name": "IPSO Version",
      "value": "",
      "unit": "",
      "access_mode": "R",
      "data_type": "TEXT",
      "value_type": "STRING",
      "max_length": 6,
      "bacnet_type": "character_string_value_object",
      "bacnet_unit_type_id": 95,
      "bacnet_unit_type": "UNITS_NO_UNITS"
    },
    {
      "id": "temperature_unit",
      "name": "Temperature Unit",
      "value": "",
      "unit": "",
      "access_mode": "RW",

```

```

    "data_type": "ENUM",
    "value_type": "UINT8",
    "values": [
      { "value": 0, "name": "celsius" },
      { "value": 1, "name": "fahrenheit" }
    ],
    "bacnet_type": "multistate_value_object",
    "bacnet_unit_type_id": 95,
    "bacnet_unit_type": "UNITS_NO_UNITS",
    "reference": ["temperature_control_mode", "temperature_target"]
  }
]
}

```

Object Mapping Function-JSON Configuration

Item	Description															
id	This value must be the same as the variable names of decoders and encoders.															
name	Leave blank or customize any content as required.															
value	Unused. Leave blank.															
unit	Leave blank or type the unit as required.															
access_mode	<p>Set the access mode of this object. Supported options and corresponding Modbus register types:</p> <table border="1"> <thead> <tr> <th>Option</th> <th>Description</th> <th>Modbus Register Type</th> </tr> </thead> <tbody> <tr> <td>R</td> <td>Read-only</td> <td>Discrete Input, Input Register</td> </tr> <tr> <td>W</td> <td>Write-only</td> <td>Coil, Holding Register</td> </tr> <tr> <td>RW</td> <td>Read-write</td> <td>Coil, Holding Register</td> </tr> </tbody> </table>	Option	Description	Modbus Register Type	R	Read-only	Discrete Input, Input Register	W	Write-only	Coil, Holding Register	RW	Read-write	Coil, Holding Register			
Option	Description	Modbus Register Type														
R	Read-only	Discrete Input, Input Register														
W	Write-only	Coil, Holding Register														
RW	Read-write	Coil, Holding Register														
data_type	<p>Define the value type of this variable. Supported options:</p> <table border="1"> <thead> <tr> <th>Option</th> <th>Description</th> <th>Modbus Register Type</th> </tr> </thead> <tbody> <tr> <td>TEXT</td> <td>String type data, example: serial number</td> <td>Input Register, Holding Register</td> </tr> <tr> <td>NUMBER</td> <td>Number type data including integer and float, example: temperature</td> <td>Input Register, Holding Register</td> </tr> <tr> <td>BOOL</td> <td>Only 0 and 1 status, example: button status</td> <td>Discrete Input, Coil</td> </tr> <tr> <td>ENUM</td> <td>Multiple values</td> <td>Input Register, Holding Register</td> </tr> </tbody> </table> <p>Note: if the data type is ENUM and the reference parameter is not blank, it is suggested to set Modbus register type as Input Register or Holding Register.</p>	Option	Description	Modbus Register Type	TEXT	String type data, example: serial number	Input Register, Holding Register	NUMBER	Number type data including integer and float, example: temperature	Input Register, Holding Register	BOOL	Only 0 and 1 status, example: button status	Discrete Input, Coil	ENUM	Multiple values	Input Register, Holding Register
Option	Description	Modbus Register Type														
TEXT	String type data, example: serial number	Input Register, Holding Register														
NUMBER	Number type data including integer and float, example: temperature	Input Register, Holding Register														
BOOL	Only 0 and 1 status, example: button status	Discrete Input, Coil														
ENUM	Multiple values	Input Register, Holding Register														

value_type	Supported options: UINT8, INT8, UINT16, INT16, UINT32, INT32, FLOAT, STRING.
values	Set the value range of this variable.
max_length	When the value type is STRING, set the maximum length of the strings or maximum length of Modbus registers.
bacnet_type	Supported options: analog_value_object, analog_input_object, analog_output_object, binary_value_object, binary_input_object, binary_output_object, multistate_value_object, multistate_input_object, multistate_output_object
bacnet_unit_type_id	Type the BACnet unit ID which can be found here .
bacnet_unit_type	Type the BACnet unit type which can be found here (see Description).
reference	If this variable should be written together with other variables, add the variables array here.

Table 3-2-2-9 Object Mapping Function -JSON Function Parameters

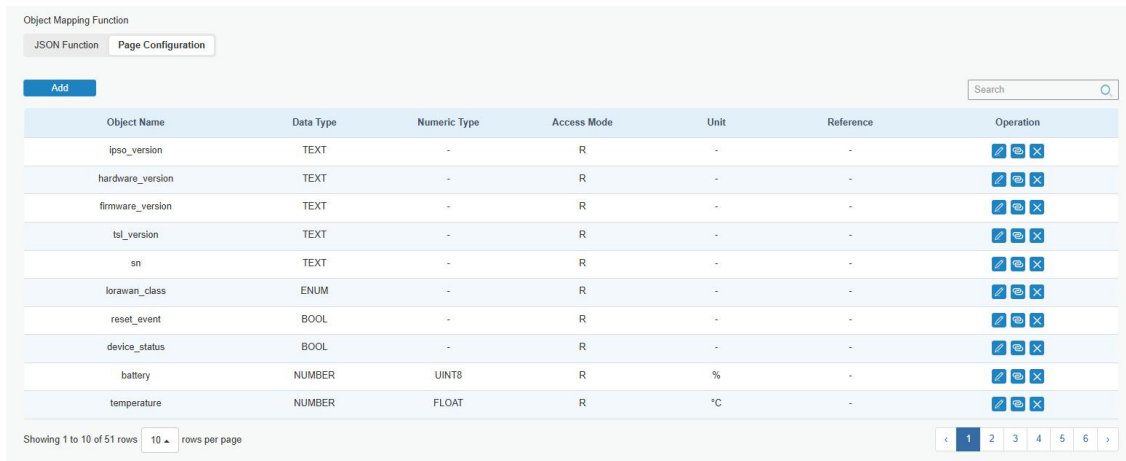


Figure 3-2-2-11

Object Mapping Function-Page Configuration	
Item	Description
Add	Add a new object.
Object Name	Show the object name.
Data Type	Show the data type of this object.
Numeric Type	Show the numeric type when the data type is NUMBER.
Access Mode	Show the access mode of this object.
Unit	Show the unit of this object.
Reference	Show the related objects of this object.
Operation	<p> : Edit the object.</p> <p> : Relate this object to other objects. After related, these objects should be written together.</p> <p> : Delete the object.</p>

Table 3-2-2-10 Object Mapping Function -Page Configuration Parameters

Add

Object Name	<input type="text"/>
Object Description	<input type="text"/>
Data Type	<input type="text" value="v"/>
Access Mode	<input type="text" value="v"/>
BACnet Forwarding	<input checked="" type="checkbox"/>
Object Type	<input type="text" value="v"/>
Modbus Forwarding	<input checked="" type="checkbox"/>
Register Type	<input type="text" value="v"/>
Data Format	<input type="text" value="v"/>
Register Quantity	<input type="text"/>

Figure 3-2-2-12

Object Mapping Function-Add an Object	
Item	Description
Object Name	The name must be the same as the variable name of decoder or encoder.
Object Description	The description of the object.
Data Type	The data type of this object.
Value 0/1	When data type is BOOL, set the value of 0 and 1 status.
Enumeration Number	When data type is ENUM, set the supported option quantity.
Numeric Type	When the data type is Numeric Type, set the number type.
Unit	When the data type is NUMBER, set the unit of the object.
Maximum Length	When data type is TEXT, set the maximum length of the text.
Access Mode	The access mode of this object.
BACnet Forwarding	Enable to show the BACnet object parameters details. These parameters will be typed automatically according to Data Type and Access Mode.
Modbus Forwarding	Enable to show the Modbus object parameters details. These parameters will be typed automatically according to Data Type and Access Mode.

Table 3-2-2-11 Object Mapping Function -Add Object Parameters

3.2.2.4 Profiles

A Profile defines the device capabilities and boot parameters that are needed by the Network Server for setting the LoRaWAN® radio access service. These information elements shall be provided by the end-device manufacturer. UG65 has pre-configured 12 device files and users can also create a new device profile.

Name	Max TXPower	Join Type	Class Type	Operation
ClassA-ABP	0	ABP	Class A	
ClassA-ABP-SF7	0	ABP	Class A	
ClassA-OTAA	0	OTAA	Class A	
ClassA-OTAA-SF7	0	OTAA	Class A	
ClassB-ABP	0	ABP	Class A Class B	
ClassB-OTAA	0	OTAA	Class A Class B	
ClassC-ABP	0	ABP	Class A Class C	
ClassC-ABP-SF7	0	ABP	Class A Class C	
ClassC-OTAA	0	OTAA	Class A Class C	
ClassC-OTAA-SF7	0	OTAA	Class A Class C	
ClassCB-ABP	0	ABP	Class A Class B Class C	
ClassCB-OTAA	0	OTAA	Class A Class B Class C	

Figure 3-2-2-13

Device Profiles

Name

Max TXPower

Join Type

Class Type Class A Class B Class C

Advanced

Figure 3-2-2-14

Device Profiles Settings	
Item	Description
Name	Enter the name of the device profile.
Max TXPower	Enter the maximum transmit power. The TXPower indicates power levels relative to the Max EIRP level of the end-device. 0 means using the max EIRP. EIRP refers to the Equivalent Isotropically Radiated Power.
Join Type	Select from: "OTAA" and "ABP".
Class Type	Class A is fixed as enabled. Users can check the box of Class B or Class C to add the class type. Note: Beacon period should be set to nonzero value in Packet Forwarder > Advanced if using Class B.

Table 3-2-2-12 Device Profiles Setting Parameters

ADR	<input checked="" type="checkbox"/>	
MAC Version	1.0.2	▼
Regional Parameters Revision	B	▼
RX1 Datarate Offset	0	▼
RX2 Datarate	DR8(SF12, 500kHz)	▼
RX2 Channel Frequency	923300000	Hz
Frequency List		Hz
Device Channel		

Figure 3-2-2-15

Device Profile Advanced Settings		
Item	Description	Default
ADR	Enable or disable the gateway network server to adjust the datarate of end devices.	Enable
MAC Version	Choose the version of the LoRaWAN® supported by the end-device.	1.0.2
Regional Parameter Revision	Revision of the Regional Parameters document supported by the end-device.	B
RX1 Datarate Offset	The offset used to calculate the RX1 data rate, based on the uplink data rate.	Based on what is specified in the LoRaWAN® regional parameters document
RX2 Datarate	Enter the RX2 datarate which used for the RX2 receive-window.	
RX2 Channel Frequency	RX2 channel frequency which used for the RX2 receive-window.	
Frequency List	List of factory-preset frequencies. The range is based on what is specified in the LoRaWAN® regional parameters document.	Null
Device Channel	Set the device frequency channel by entering channel indexes. When configured, it takes precedence over the global channel. This setting only works for CN470/US915/AU915.	Null
Class B is enabled		
PingSlot Periodicity	Period of opening the pingslot.	Every 4 Second
PingSlot DataRate	Datarate of the node receiving downlinks.	Based on the supported frequency
PingSlot Freq	Frequency of the node receiving downlinks.	
Class C is enabled		
Class C ACK	The time for confirmed downlink transmissions.	10

Timeout		
---------	--	--

Table 3-2-2-13 Device Profiles Advanced Setting Parameters

3.2.2.5 Device

A device refers to the end device that connects to and communicates over the LoRaWAN® network.

Device Name	Device EUI	Device-Profile	Payload Codec	Application	Last Seen	Status	Operation
UC100		UC100	uc100v2	test	2 hours ago	Online	✎ ✕

Showing 1 to 1 of 1 rows

Figure 3-2-2-16

Item	Description
Add	Add a device.
Bulk Import	Download template and import multiple devices. Note: Do not delete the table header of the template file, each line contains the information of every device.
Delete All	Delete all devices in the list.
Export All	Export all device information as a CSV file.
Device Name	Show the name of the device.
Device EUI	Show the EUI of the device.
Device-Profile	Show the name of the device's device profile.
Payload Codec	Show the used payload codec of the device. Click to check the details of this payload codec.
Application	Show the name of the device's application.
Last Seen	Show the time of the last packet received.
Status	Show the status of the device. Never activated: No device packet received within 10 minutes (OTAA) or timeout (ABP) after creation. Online: Device packets received regularly within the timeout. Offline: No device packet received within the timeout. Incorrect key: Device key values do not match. Network access timed out: The device did not send a join request within the timeout. Join timeout: No device packet received after 10 minutes (OTAA) or timeout (ABP) since creation. Node no uplinking: No device packet received after sending Join Accepts.
Operation	Edit or delete the device.

Table 3-2-2-14 Device Parameters

Device Name	<input type="text" value="lora-sensor"/>
Description	<input type="text" value="a short description of your node"/>
Device EUI	<input type="text" value="24e1641194784358"/>
Device-Profile	<input type="text" value="ClassA-OTAA"/>
Application	<input type="text" value="cloud"/>
Payload Codec	<input type="text"/>
fPort	<input type="text" value="1"/>
Modbus RTU Data Transmission	<input type="text" value="Disable"/>
Frame-counter Validation	<input type="checkbox"/>
Application Key	<input type="radio"/> Default Value <input checked="" type="radio"/> Custom Value
	<input type="text"/>
Device Address	<input type="text"/>
Network Session Key	<input type="text"/>
Application Session Key	<input type="text"/>
Uplink Frame-counter	<input type="text" value="0"/>
Downlink Frame-counter	<input type="text" value="0"/>
Timeout	<input type="text" value="1440"/> min

Figure 3-2-2-17

Device Configuration	
Item	Description
Device Name	Enter the name of this device.
Description	Enter the description of this device.
Device EUI	Enter the EUI of this device.
Device-Profile	Choose the device profile.
Application	Choose the application profile.
Payload Codec	Choose the payload codec that exists on Payload Codec page.
fPort	Enter the downlink port of device, it's 85 by default for Milesight devices.
Modbus RTU Data Transmission	<p>Choose from: "Disable", "Modbus RTU to TCP", "Modbus RTU over TCP". This feature applies only to Milesight LoRaWAN® controllers. (UC501/UC300, etc.)</p> <p>Modbus RTU to TCP: The TCP client can send Modbus TCP commands to request controller Modbus data.</p> <p>Modbus RTU over TCP: TCP client can send Modbus RTU commands to ask for controller Modbus data.</p>
Modbus RTU Fport	Enter the LoRaWAN® frame port for transparent transmission between Milesight LoRaWAN® controllers and UG65.

	<p>Range: 2-84, 86-223.</p> <p>Note: This value must match the fPort of the Milesight LoRaWAN® controller.</p>
TCP Port	Enter the TCP port for data transmission between the TCP client and UG65 (acting as TCP Server). Range: 1-65535.
Frame-Counter Validation	Disabling frame-counter validation compromises security by allowing replay attacks.
Timeout	Timeout period for determining the device's online/offline status. Range: 1-4320 mins
Under OTAA Mode	
Application Key	<p>Whenever an end-device joins a network via over-the-air activation, the application key is used to derive the Application Session key.</p> <p>Default Value: 5572404C696E6B4C6F52613230313823 or Device EUI+Device EUI. This is used for Milesight end devices.</p> <p>Custom Value: Customize the 32-digit hexadecimal AppKey value.</p>
Under ABP Mode	
Device Address	<p>The device address identifies the end-device within the current network.</p> <p>Default Value: 5th to 12th of SN. This is used for Milesight end devices.</p> <p>Custom Value: Customize the 8-digit hexadecimal DevAddr value.</p>
Network Session Key	<p>The network session key is specific for the end-device. It is used by the end-device to calculate the MIC or part of the MIC (message integrity code) of all uplink data messages to ensure data integrity.</p> <p>Default Value: 5572404C696E6B4C6F52613230313823 or Device EUI+Device EUI. This is used for Milesight end devices.</p> <p>Custom Value: Customize the 32-digit hexadecimal NwksKey value.</p>
Application Session Key	<p>The AppSKey is an application session key specific for the end-device. It is used by both the application server and the end-device to encrypt and decrypt the payload field of application-specific data messages.</p> <p>Default Value: 5572404C696E6B4C6F52613230313823 or Device EUI+Device EUI. This is used for Milesight end devices.</p> <p>Custom Value: Customize the 32-digit hexadecimal AppsKey value.</p>
Uplink Frame-counter	The number of data frames which sent uplink to the network server. It will be incremented by the end-device and received by the end-device. Users can reset the a personalized end-device manually, then the frame counters on the end-device and the frame counters on the network server for that end-device will be reset to 0.
Downlink Frame-counter	The number of data frames which received by the end-device downlink from the network server. It will be incremented by the network server. Users can reset a personalized end-device manually, then the frame counters on the end-device and the frame counters on the network server for that end-device will be reset to 0.


Table 3-2-2-15 Device Setting Parameters

Related Configuration Example

Device configuration

3.2.2.6 FUOTA

Firmware Update Over the Air (FUOTA) is a standard for distributing firmware to end devices updates using unicast or multicast. **Before using this feature, ensure the end device supports the standard LoRaWAN® FUOTA protocol.**

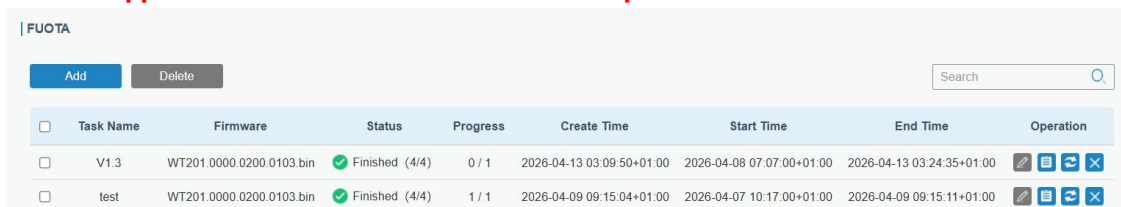

The screenshot shows a web interface for managing FUOTA tasks. At the top, there are 'Add' and 'Delete' buttons and a search bar. Below is a table with columns: Task Name, Firmware, Status, Progress, Create Time, Start Time, End Time, and Operation. Two tasks are listed: 'V1.3' and 'test', both with a status of 'Finished (4/4)' and progress of '1 / 1'.

Task Name	Firmware	Status	Progress	Create Time	Start Time	End Time	Operation
V1.3	WT201.0000.0200.0103.bin	Finished (4/4)	0 / 1	2026-04-13 03:09:50+01:00	2026-04-08 07:07:00+01:00	2026-04-13 03:24:35+01:00	[Edit] [Details] [Retry] [Delete]
test	WT201.0000.0200.0103.bin	Finished (4/4)	1 / 1	2026-04-09 09:15:04+01:00	2026-04-07 10:17:00+01:00	2026-04-09 09:15:11+01:00	[Edit] [Details] [Retry] [Delete]

Figure 3-2-2-18





FUOTA	
Item	Description
Add	Click to add a task.
Delete	Check the boxes of the task list and click to delete these tasks.
Task Name	The task name.
Firmware	The firmware to upgrade in this task.
Status	The task status. Pending: Wait for the scheduled time to process the task. Waiting: Prepare to create the session for an upgrade. Executing: At least one device replies to the upgrade result. Finished: All devices reply the upgrade results including success and failure.
Progress	The device amount that is upgraded successfully/is planned to be upgraded.
Create Time	The time to create this task.
Start Time	The time to start this task.
End Time	The time to complete this task.
Operation	 : Edit this task when task status is Pending.  : Check task details, including the success and failure status of every device.  : Retry the task to devices which are upgraded failed when task status is Finished.  : Delete this task when task status is Pending or Finished.

Table 3-2-2-16 FUOTA Parameters

Add FUOTA Tasks

1. Click **Add** button to add a FUOTA task.
2. Configure the task settings.

Task Settings

Task Name

Start Time

Description

Firmware Setting

Firmware [Upload a new firmware file](#) [Select an official firmware file](#) [Delete](#)

Fragment Size Bytes

Fragment Interval ms

Redundancy percent %

Multicast Setting

Datarate ▼

Frequency Hz

Figure 3-2-19

Add Task Settings													
Item	Description												
Basic Information													
Task Name	Customize a task name.												
Start Time	Set the time to start this task.												
Description	Enter the description for this task.												
Firmware Settings													
Firmware	<p>Import the firmware to upgrade.</p> <p>Upload a new firmware file: Import a firmware locally.</p> <p>Select an Official Firmware file: Select the product model first and select the firmware to download from the official website. It requires the gateway to access the Internet.</p> <div style="border: 1px solid #ccc; padding: 5px; margin-top: 10px;"> <p>Select an official firmware file</p> <p>Please select the product model first <input type="text"/></p> <p style="text-align: right;"><input type="text" value="Search"/> </p> <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr style="background-color: #e6f2ff;"> <th>Firmware Name</th> <th>Product Model</th> <th>Firmware Version</th> <th>Support Hardware Version</th> <th>Support Firmware Version</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td colspan="6">No matching records found</td> </tr> </tbody> </table> </div>	Firmware Name	Product Model	Firmware Version	Support Hardware Version	Support Firmware Version	Description	No matching records found					
Firmware Name	Product Model	Firmware Version	Support Hardware Version	Support Firmware Version	Description								
No matching records found													
Fragment Size	<p>The firmware file will be split as this size to assign to devices. Usually please keep this value as default.</p> <p>If the network environment is complex or bad, it is suggested to reduce this value to 64 or a lower value; if the network environment is good, this value can be added to increase to improve transmission speed.</p>												
Fragment	The interval to assign firmware fragments to devices. Usually please												

Interval	keep this value as default. If the network environment is complex or bad, it is suggested to increase this value to 7-10s or a higher value; if the network environment is good, this value can be decreased to improve transmission speed.
Redundancy Percent	The device will send 30% redundancy packets for firmware file packet correction. Usually please keep this value as default. If the network environment is complex or bad, it is suggested to increase this value to 40%-50% or a higher value to improve transmission success; if the network environment is good, this value can be reduced.
Multicast Settings	
Datarate	Datarate to assign the firmware fragments to devices.
Frequency	Downlink frequency to assign the firmware fragments to devices.

Table 3-2-2-17 Task Parameters

3. Select the devices to execute this task. Please select the devices with the same model.

Multicast Device List (Selected Devices: 1)

The current list has filtered out devices that are currently executing OTA tasks and automatically matched devices that meet the upgrade conditions

Search

<input type="checkbox"/>	Device Name	Device EUI	Product Model	Profile Name	Current Firmware Version	Current Hardware Version
<input type="checkbox"/>	em320-lh	24e124	EM32X	ClassA-OTAA	v1.3	v1.2
<input type="checkbox"/>	009569060000ef35	009569	-	ClassA-OTAA	-	-
<input type="checkbox"/>	WS302	24e124	WS302	ClassA-OTAA	-	-
<input type="checkbox"/>	TERRY-WT101	24e124	WT10X,wt10X	ClassA-OTAA	-	-
<input type="checkbox"/>	WS502	24e124	WS50X	ClassC-OTAA	-	-
<input type="checkbox"/>	dj	24e124	EM30X	ClassA-OTAA	-	-
<input type="checkbox"/>	300	24e124	UC300	ClassC-OTAA	-	-
<input checked="" type="checkbox"/>	terry-wt101	24e124	WT10X,wt10X	ClassA-OTAA	v1.3	v1.1

Figure 3-2-2-20

4. Click **Save** to save these task settings.

3.2.2.7 Multicast Groups

Milesight gateways support for creating Class B or Class C multicast groups to send downlink messages to a group of end devices. A multicast group is a virtual ABP device (i.e. shared session keys), does not support uplink, confirmed downlink nor MAC commands.

Multicast Groups

Search

[Add](#)

Multicast Address	Group Name	Number of Devices	Operation
No matching records found			

Figure 3-2-21

Item	Description
Add	Add a multicast group.
Group Name	Show the name of the group.
Number of Devices	Show the device number of the group.
Operation	Edit or delete the multicast group.

Table 3-2-2-18 Multicast Group Parameters

Group Name

Multicast Address

Multicast Network Session Key

Multicast Application Session Key

Class Type

Datarate

Frequency Hz

Frame-counter

Selected Devices

Add Device

Figure 3-2-22

Multicast Group Configuration	
Item	Description
Group Name	Enter the name of this multicast group.
Multicast Address	Device address (Dev Addr) of all devices in this group.
Multicast Network Session Key	The network session key (Netwks Key) of all devices in this group.
Multicast Application Session Key	The application session key (AppSKey) of all devices in this group.
Class Type	Class B and Class C are optional.
Datarate	Datarate of the node receiving downlinks.
Frequency	Downlink frequency of all devices in this group.
Frame-counter	The number of data frames which received by the end-device downlink from the network server. It will be incremented by the network server.

Ping Slot Periodicity	Period of opening the pingslot. This is only applied to Class B end devices.
Selected Devices	Show all device names in this group.
Add Device	Add devices in the pull-down list.

Table 3-2-2-19 Multicast Group Setting Parameters

3.2.2.8 Gateway Fleet

Milesight gateways can connect to the gateway network server. Each gateway supports a maximum of 100 agent gateways.

Gateway ID	Name	Status	Last Seen	Operation
24E124FFFEFAAB73	Local Gateway	Online	2026-04-09 10:57:55	[Details] [Delete]
24E124FFFEF12263	gateway1	-		[Details] [Edit] [Delete] [Add]

Figure 3-2-2-23

Item	Description
Gateway ID	Show the gateway ID.
Name	Show the name of the gateway.
Status	Show the connection status of the gateway.
Last Seen	Show the time of last packet received.
Operation	<ul style="list-style-type: none"> [Details]: Check the agent gateway details. [Edit]: Edit the name and location of the agent gateway. [Delete]: Delete this agent gateway. [Add]: Add an agent gateway.

Table 3-2-2-20 Gateway Fleet Parameters

Figure 3-2-2-24 Add Gateway

Item	Description
Gateway ID	Enter the unique gateway ID to recognize the gateway.
Name	Enter the name of this gateway.

Location	The gateway's GPS data can be edited here. If the gateway sends GPS data it will overwrite your custom data.
----------	--

Table 3-2-2-21 Gateway Setting Parameters

3.2.2.9 Packets

The gateway supports to display latest 1000 pieces of packets and send command to devices.

Figure 3-2-2-25

Send Data To Device/Multicast Group	
Item	Description
Device EUI	Enter the EUI of the device to receive the payload.
Multicast Group	Select the multicast group to send downlinks. Multicast groups can be added under Multicast Groups tab.
Type	Choose the payload type to enter in the payload Input box: ASCII, Hex, base64.
Payload	Enter the message to be sent to this device.
Port	Enter the LoRaWAN® frame port for packet transmission between device and Network Server.
Confirmed	After being enabled, the end device will receive downlink packet and should answer "confirmed" to the network server. The multicast feature does not support confirmed downlink.


Table 3-2-2-22 Send Data to Device Parameters


Device EUI/Group	Gateway ID	Frequency	Datarate	RSSI/SNR	Size	Fcnt	Type	Time	Details
24E124408F452706	C0BA1FFFFE026A86	868500000	SF10BW125	-/-	17	0	JnAcc	2026-04-13 04:20:01+01:00	ⓘ
24E124408F452706	C0BA1FFFFE026A86	868500000	SF10BW125	-86/10.5	18	0	JnReq	2026-04-13 04:20:01+01:00	ⓘ
24E124408F452706	C0BA1FFFFE026A86	868500000	SF10BW125	-/-	17	0	JnAcc	2026-04-13 04:19:45+01:00	ⓘ
24E124408F452706	C0BA1FFFFE026A86	868500000	SF10BW125	-82/11.2	18	0	JnReq	2026-04-13 04:19:44+01:00	ⓘ
24E124408F452706	C0BA1FFFFE026A86	868500000	SF7BW125	-94/11.5	5	20	UpUnc	2026-04-13 04:19:03+01:00	ⓘ
24E124408F452706	C0BA1FFFFE026A86	868300000	SF7BW125	-/-	0	14	DnUnc	2026-04-13 04:18:59+01:00	ⓘ
24E124408F452706	C0BA1FFFFE026A86	868300000	SF7BW125	-93/12.8	23	19	UpCnf	2026-04-13 04:18:58+01:00	ⓘ
24E124408F452706	C0BA1FFFFE026A86	868500000	SF7BW125	-94/10.0	5	18	UpUnc	2026-04-13 04:18:43+01:00	ⓘ
24E124408F452706	C0BA1FFFFE026A86	868300000	SF7BW125	-94/13.5	5	17	UpUnc	2026-04-13 04:18:38+01:00	ⓘ
24E124408F452706	C0BA1FFFFE026A86	868100000	SF7BW125	-95/14.2	5	16	UpUnc	2026-04-13 04:18:20+01:00	ⓘ

Figure 3-2-2-26

Network Server	
Item	Description
Clear Log	Clear the packet logs sent to the network server.
Clear Downlink Queue	Clear the downlink queue that is not sent to the device.
Download	Download the packet logs as a CSV file.
Device EUI/Group	Show the EUI of the device or multicast group.
Frequency	Show the used frequency to transmit packets.
Datarate	Show the used datarate to transmit packets.
SNR	Show the signal-noise ratio.
RSSI	Show the received signal strength indicator.
Size	Show the size of payload.
Fcnt	Show the frame counter.
Type	Show the type of the packet: JnAcc - Join Accept Packet JnReq - Join Request Packet UpUnc - Uplink Unconfirmed Packet UpCnf - Uplink Confirmed Packet - ACK response from network requested DnUnc - Downlink Unconfirmed Packet DnCnf - Downlink Confirmed Packet- ACK response from end-device requested
Time	Show the time of packet was sent or received.

Table 3-2-2-23 Packet Parameters

Click  to get more details about the packet. As shown:

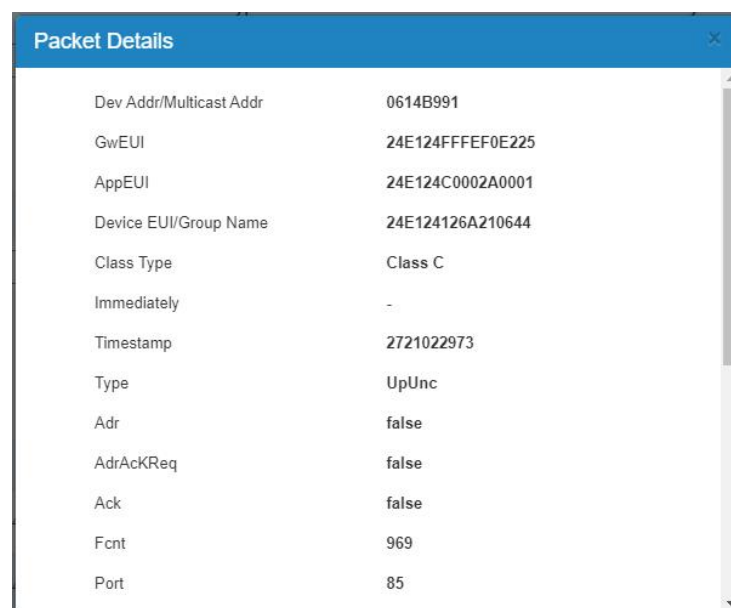

Packet Details	
Dev Addr/Multicast Addr	0614B991
GwEUI	24E124FFFEF0E225
AppEUI	24E124C0002A0001
Device EUI/Group Name	24E124126A210644
Class Type	Class C
Immediately	-
Timestamp	2721022973
Type	UpUnc
Adr	false
AdrAckReq	false
Ack	false
Fcnt	969
Port	85

Figure 3-2-2-27

Item	Description
------	-------------

Dev Addr/Multicast Addr	Show the address of the device/multicast group.
GwEUI	Show the EUI of the gateway.
AppEUI	Show the App EUI of the end device.
DevEUI/Group Name	Show the EUI of the device/multicast group name.
Class Type	Show the class type of the device or multicast group.
Immediately	Whether to send this downlink packet immediately.
Timestamp	Show the time to receive this packet after packet forwarder starts running. Unit: ms
Type	Show the type of the packet: JnAcc - Join Accept Packet JnReq - Join Request Packet UpUnc - Uplink Unconfirmed Packet UpCnf - Uplink Confirmed Packet - ACK response from network requested DnUnc - Downlink Unconfirmed Packet DnCnf - Downlink Confirmed Packet- ACK response from end-device requested
Adr	True: The end-node has enabled ADR. False: The end-node has not enabled ADR.
AdrAckReq	In order to validate that the network is receiving the uplink messages, nodes periodically transmit ADRACKReq message. This is 1 bit long. True: Network should respond in ADR_ACK_DELAY time to confirm that it is receiving the uplink messages. False: ADR is disabled or Network does not respond in ADR_ACK_DELAY.
Ack	True: This frame is ACK. False: This frame is not ACK.
Fcnt	Show the frame-counter of this packet. The network server tracks the uplink frame counter and generates the downlink counter for each end-device.
FPort	The FPort to transmit this packet. If this packet is MAC command, the port is 0; if this packet includes application data, the port is not 0 (1-233).
Modulation	LoRa means the physical layer uses the LoRa modulation.
Bandwidth	Show the bandwidth of this channel.
SpreadFactor	Show the spreadFactor of this channel.
Bitrate	Show the bitrate of this channel.
CodeRate	Show the coderate of this channel.
SNR	Show the SNR of this channel.
RSSI	Show the RSSI of this channel.
Power	Show the transmit power of the device.

Payload (b64)	Show the application payload of this packet.
Payload (hex)	Show the application payload of this packet.
Json	Show the data after decoding.
MIC	Show the MIC of this packet. MIC is a cryptographic message integrity code, computed over the fields MHDR, FHDR, FPort and the encrypted FRMPayload.

Table 3-2-2-24 Packets Details Parameters

Related Topic

[Send Data to Device](#)

3.3 Protocol Integration

3.3.1 BACnet Server

UG65 can work as LoRaWAN to BACnet gateway, allowing easy integration with BMS system. Before using this feature, ensure the version of inbuilt payload codec library is latest and corresponding LoRaWAN® devices have added correct payload codec.

3.3.1.1 Server

Server

Enable

Network Type

Interface

IP Address **192.168.4.100**

UDP Port

Device ID

Device Name

BBMD

Global Object

Global Object Details status frequency rssi snr datarate frame_count

Automatically Add Objects

Figure 3-3-1-1

Server Settings	
Item	Description
Enable	Enable or disable BACnet server function.
Network Type	Select the network type as BACnet/IP or BACnet/SC.
Device ID	BACnet device ID of this gateway, must be unique on the BACet network.

Device Name	The unique name to represent the device in the BACnet network.
Global Object	<p>After being enabled, the gateway will add the global objects for every device automatically. These global objects are not allowed to be deleted, unless this option is disabled.</p> <p>Status: device online/offline status</p> <p>Frequency: device uplink frequency</p> <p>Rssi: device uplink RSSI</p> <p>Snr: device uplink SNR</p> <p>Datarate: device uplink datarate</p> <p>Frame_count: device uplink frame count (FCNT)</p>
Automatically Add Objects	After being enabled, the gateway will add objects according to the payload codec automatically when adding devices to network server.

Table 3-3-1-1 Server Parameters

Server

Enable

Network Type BACnet/IP ▼

Interface Auto ▼

IP Address **192.168.4.100**

UDP Port 47808

Device ID 2367525

Device Name UG-6221E2420257

BBMD

IP Address

IP Port 47808

Time TO Live 60000 s

Figure 3-3-1-2

Server-BACnet/IP Settings	
Item	Description
Interface	Select the network interface to communicate with BACnet clients.
IP Address	Show the IP address of the current interface.
UDP Port	Set communication port of BACnet/IP. Range: 1-65535. The default port is 47808.
BBMD	<p>Enable BBMD (BACnet/IP Broadcast Management Device) to allow BACnet devices on different network subnets should to communicate.</p> <p>IP Address: Fill in the IP address of BBMD device or external device registrar.</p> <p>IP Port: Fill in the UDP/IP port for external device registration.</p> <p>Time TO Live: Number of seconds used on external device registration.</p>

Table 3-3-1-2 Server-BACnet/IP Parameters

Network ID

UUID **24e124f8-0732-24e1-24f8-073224e124f8**

Global Object

Automatically Add Objects

Heartbeat Timeout

Node

Enable

Primary Hub URI

Primary Hub Status -

Failover Hub URI

Failover Hub Status -

CA File

Client Certificate File

Client Key File

Direct Connections

Enable

Incoming Connections

Outgoing Connections

CA File

Client Certificate File

Client Key File

Figure 3-3-1-3

Server-BACnet/SC Settings	
Item	Description
Network ID	Set the network ID to identify the network. Only the devices with the same network ID can communicate with each other without routing.
UUID	Display the UUID of the gateway in the BACnet/SC network.
Heartbeat Timeout	Set the interval to send heartbeat packet to the hub or the node.
Node	
Enable	Enable or disable to work as a node
Primary Hub URI	Set the URI of the primary hub. URI format (address can be IP or domain name): <i>wss://address:port</i>
Primary Hub Status	Display the connection status between the node and the primary hub.
Failover Hub URI	Set the URI of the failover hub if the node fails to connect to the

	primary hub.
Failover Hub Status	Display the connection status between the node and the failover hub. URI format (address can be IP or domain name): <i>wss://address:port</i>
CA File	Click Browse to select the files from local path, then click Import to upload the files.
Client Certificate File	
Client Key File	
Direct Connections	
Enable	Enable or disable to set up connections with other nodes directly.
Incoming Connections	Enable or disable connections from other nodes. At maximum of 10 nodes can connect to this gateway. Port Number: Set the port number to allow the connection. CA File/Server Certificate File/Server Key File: Click Browse to select the files from local path, then click Import to upload the files. Device ID: Display the node device ID to connect to the gateway. UUID: Display the node device UUID to connect to the gateway. VMAC: Display the node device VMAC to connect to the gateway. Status: Display the connection status between the gateway and the node.
Outgoing Connections	Enable or disable to connect other nodes. A gateway can connect 10 nodes at most. CA File/Client Certificate File/Client Key File: Click Browse to select the files from local path, then click Import to upload the files. Name: Set the name of the node to connect. URI: Set the URI of the node to connect. URI format (address can be IP or domain name): <i>wss://address:port</i> Status: Display the connection status between the gateway and the node.

Table 3-3-1-3 Server-BACnet/SC Parameters

3.3.1.2 BACnet Object

+	Object Name	Object Type	Object Instance Nr	Present Value	Unit	Updates	Update Time	COV	Operation
-	WT102-868M								
	WT102-868M.status	MultiState-Value	0	-		0	-	-	<input checked="" type="checkbox"/> <input type="checkbox"/>
	WT102-868M.battery	Analog-Input	0		%	0	-	Disabled	<input checked="" type="checkbox"/> <input type="checkbox"/>

Showing 1 to 1 of 1 rows

Figure 3-3-1-2

Item	Description
Add Object	Click to select desired objects to add to this server. The gateway supports adding 10,000 objects at most. Note: Ensure the content of payload codec is correct, and the

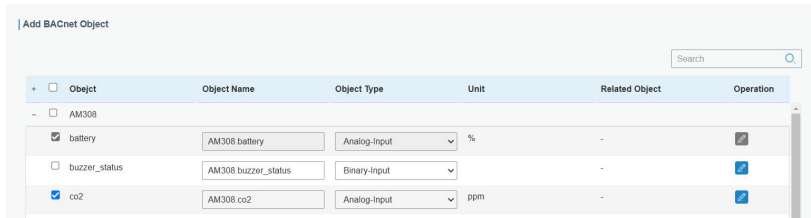
	<p>device selects the correct payload codec.</p> 
Add NC Object	Add a Notification-Class type object to determine the recipients of alarms. The gateway supports adding 200 NC objects at most.
Bulk Import	Download template to import multiple BACnet objects.
All Export	Export all objects as an .xlsx format file.
Delete	Select desire objects to delete.
Object Name	Show the name of the BACnet object.
Object Type	Show the type of this object.
Object Instance Nr	Show the instance number of this object.
Present Value	Show the latest value of object.
Units	Show the unit of this object value.
Updates	Show the update times of this object value.
Update time	Show the time for this object to get and update the data.
COV	Show if COV (Change of value) is enabled.
Operation	Edit or delete the object.

Table 3-3-1-2 BACnet Object List Parameters

BACnet Object

Device Name:

LoRa Object:

Object Name:

Object Type:

The Object Instance:

Unit:

Description:

COV:

Event Detection:

Figure 3-3-1-3

BACnet Object Configuration	
Item	Description

Device Name	Show the name of devices.
LoRa Object	Show the corresponding name of LoRa object.
Object Name	Customize an unique name for this object.
Object Type	Select the object type as Binary Input/Output/Value, Analog Input/Output/Value, MultiState Input/Output/Value and CharacterString value.
The Object Instance	Customize the object instance.
Description	Enter the description of this object.
Event Detection	Enable to report the alarm of this value. It requires to define at least one notification class object first.
Analog Input/Output/Value	
Units	Select the unit of this object value.
COV	When object value changes, the BACnet server (gateway) will send notification of new value to BACnet client. This only applies to analog type objects.
COV Increment	Only when the object value reaches or over this increment, the BACnet server (gateway) will send the notification.
Relinquish Default	If there is no command, the analog output will be set as this relinquish default value.
Binary Input/Output/Value	
Polarity	Define the binary input/output status as Normal or Reverse.
Active Text	Characterize the intended effect of active state of binary type object value. Example: when a button is pressed and binary input is 1, active text can be defined as "Pressed".
Inactive Text	Characterize the intended effect of inactive state of binary type object value. Example: for a button, inactive text can be defined as "Unpressed".
Relinquish Default	If there is no command, the binary output will be set as this relinquish default value.
MultiState Input/Output/Value	
Number of States	Set the number of states and define the name of every state.
Relinquish Default	If there is no command, the multistate output will be set as this relinquish default value.
Event Detection	
Notification Class	Select the notification class to determine the recipients of this alarm.
Event	Select the event type to report.
Limit Event	When object type is analog type, select if reporting the event when reaching the high limit or low limit.
Deadband	Under To Offnormal status, when current value returns to (high limit-deadband) value or (low limit+deadband) lasting the delay

	time, the device will generate To Normal event. Only Analog types have this option.
Time Delay	Only when current value matches the threshold condition or is out of threshold for this time, the device will report the corresponding event.
Alarm Value	Report the To Offnormal event if the current value is equal to alarm value for delay time; report To Normal event if the current value is not equal to alarm value for delay time. Only Binary Input, Binary Value, Multi-State Input or Multi-State Value has this option.
Fault Value	Report the To Fault event if the current value is equal to fault value. Only Multi-State Input or Multi-State Value has this option.
Feedback Value	Report the To Offnormal event if the current value is equal to feedback value for delay time; report To Normal event if the current value is not equal to feedback value for delay time. Only Multi-State Output or Binary Output has this option.
Notification Type	Select the notification type as Alarm or Event.

Table 3-3-1-3 BACnet Object Configuration Parameters

BACnet Object

Object Name

Object Type

The Object Instance

Description

To-Offnormal Priority

To-Fault Priority

To-Normal Priority

Ack Required To Offnormal To Fault To Normal

Recipient List

Device ID	Valid Days	From time To Time	Process Identifier	Issue Notifications Type	Transitions	Operation
+						

Figure 3-3-1-4

Notification Class BACnet Object Configuration	
Item	Description
Object Name	Customize a unique name for this object.
Object Type	It is fixed as Notification-Class.
The Object Instance	Customize the object instance.
Description	Enter the description of this object.
To-Offnormal Priority	Set the priority number which is used by recipients to sort the event notifications. Range: 0-255 (0 being most important, 255 least)

To-Fault Priority	important)
To-Normal Priority	
Ack Required	Specify if this event requires the recipient to send the Acknowledgement Alarm message back to gateway.
Recipient List	<p>When event detection is enabled and this notification class is selected, the event notification will be sent to recipients in this list. One list supports to add 10 recipients at most.</p> <p>Device ID: the target recipient device ID.</p> <p>Valid Days: valid days to send notifications.</p> <p>From time to time: valid time to send notifications.</p> <p>Process Identifier: the identifier to indicate what process the alarm is intended for. For example, maybe process identifier 1 means maintenance alarms, 2 means critical alarms and 3 means life safety alarms, etc.</p> <p>Issue Notifications Type: select the notification type as confirmed or unconfirmed. If the gateway does not receive the response of Confirmed notification, it will send the notification once again.</p> <p>Transitions: select the reported event types.</p>

Table 3-3-1-4 Notification Class BACnet Object Configuration Parameters

3.3.2 Modbus Server

The gateway can work as Modbus server (slave) to receive Modbus RTU or Modbus TCP commands from PLC/BMS systems to read or write to LoRaWAN® devices. Before using this feature, ensure the version of inbuilt payload codec library is latest and corresponding LoRaWAN® devices have added correct payload codec.

3.3.2.1 Server

Status	Name	IP Address	Port	Connection Type	Device Number	Modbus Object Count	Operation
Enable	server1	192.168.1.1	7001	Modbus RTU Over TCP	0	0	

Showing 1 to 1 of 1 rows

Figure 3-3-2-1

Item	Description
Add	Add a Modbus server (slave). One gateway supports to add 15 servers at most.
Status	Show the enable status of this server.
Name	Show the name of the server.
IP Address	Show the IP address of this server and click to check the details.
Port	Show the communication port of this server.
Connection Type	Show the connection type of this server.

Device Number	Show the device number of this server.
Modbus Object Count	Show the Modbus object amount of this server and click the number to check the details.
Operation	Edit or delete this server.

Table 3-3-2-1 Server Parameters

Figure 3-3-2-2

Server Settings	
Item	Description
Enable	Enable or disable this Modbus server.
Name	Customize a unique name to identify this server.
Network Interface	Select the network interface for this server to communicate with Modbus clients (master). The device supports to use different network interfaces to communicate with different remote platforms.
Port	Set communication port of this server. Range: 1-65535.
Connection Type	Select the connection type of this server. Modbus TCP: Modbus client will send Modbus TCP format commands to this Modbus server. Modbus RTU over TCP: Modbus client will send Modbus RTU format commands to this Modbus server.
Type	Set the server ID type of this Modbus server. This is used for Modbus client to identify every server. No server ID: all devices use any server ID. Per-device server ID: support configuring server ID for per device.
Global Object	After enabled, the gateway will add the global objects for every device automatically. These global objects is not allowed to delete, unless this option is disabled. Status: device online/offline status Frequency: device uplink frequency Rssi: device uplink RSSI

	<p>Snr: device uplink SNR</p> <p>Datarate: device uplink datarate</p> <p>Frame_count: device uplink frame count (FCNT)</p>
Description	Add description for this server.

Table 3-3-2-2 Server Settings Parameters

3.3.2.2 Modbus Object

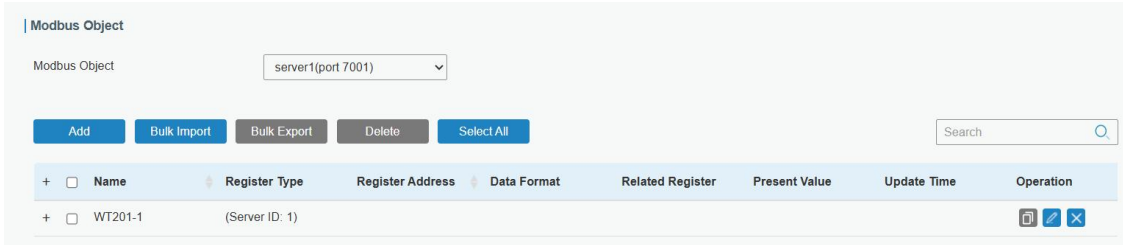


Figure 3-3-2-3

Item	Description
Modbus Object	Select the Modbus server to add and edit the objects.
Add	<p>Click to select desired objects to add to this server. The gateway supports adding 10,000 objects at most.</p> <p>Note: Ensure the content of payload codec is correct, and the device selects the correct payload codec.</p>
Bulk Import	Download template to import multiple Modbus objects.
Bulk Export	Select desire objects to export as .xlsx format file.
Delete	Select desire objects to delete.
Select All/Deslect All	Select/Deselect all objects.
Name	Show the name of this object.
Register Type	Show the register type of this object.
Register Address	Show the register address of this object.
Data Format	Show the data format of this object.
Related Object	Show the related objects.
Present value	Show the latest value of object.
Update time	Show the time for this object to get and update the data.
Operation	<p> : Edit the object.</p> <p> : Delete the object.</p> <p> : Select the objects that need to be copied, click this icon to add or cover the objects to other same model devices.</p>

Add Object: add the objects to select devices.
Cover Object: cover the objects to selected devices, and the original object settings of selected devices will be cleared.

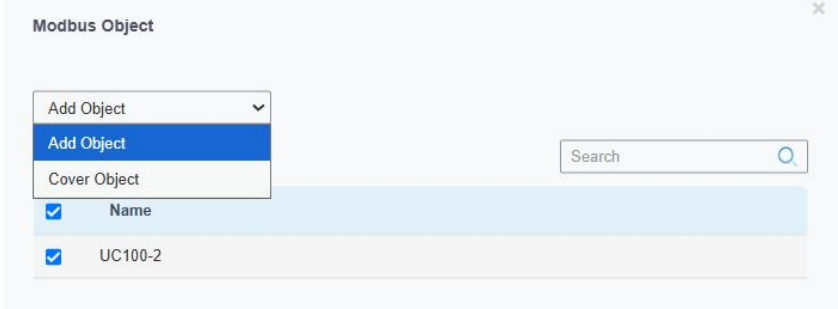


Table 3-3-2-3 Modbus Object List Parameters

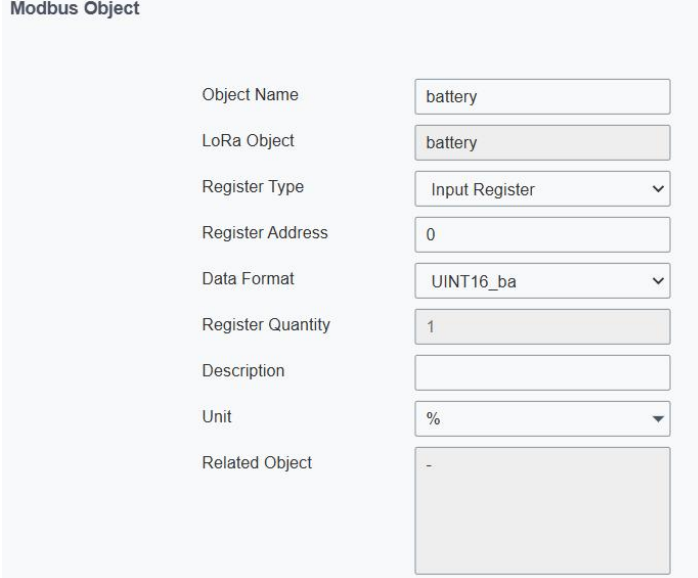


Figure 3-3-2-4

Modbus Object Configuration	
Item	Description
Object Name	Customize a unique name for this object.
LoRa Object	Show the corresponding name of LoRa object.
Object Name	Customize a unique name for this object.
Register Type	Select the Modbus register type. Discrete Input: read-only, only including 0 and 1 status. Coil: read-write, only including 0 and 1 status. Holding Register: read-write, including analog values, strings, etc. Input Register: read-only, including analog values, strings, etc.
Register Address	When adding an object, this address will generate automatically. And this address supports to change. Range: 0-65535 Note: 1) The address of the same register type must be different in one Modbus server.

	2) The address is related to register quantity. If the address of this object is 0 and register quantity is 2, the address of next object must be 2(0+2) or higher values.
Data Format	Show or select the data format of this object.
Register Quantity	Show the register occupied quantity of this object.
Description	Enter the description of this object.
Unit	Select the unit of this object.
Related Register	Show the related registers. When writing this object, related registers should be written together. Otherwise, this object will fail to change.

Table 3-3-2-4 Modbus Object Configuration Parameters

3.4 Network

3.4.1 Interface

3.4.1.1 Port

The Ethernet port can be connected with Ethernet cable to get Internet access. It supports 3 connection types.

- **Static IP:** configure IP address, netmask and gateway for Ethernet WAN interface.
- **DHCP Client:** configure Ethernet WAN interface as DHCP Client to obtain IP address automatically.
- **PPPoE:** configure Ethernet WAN interface as PPPoE Client.

The screenshot shows the configuration page for 'Port_1'. The settings are as follows:

Parameter	Value
Port	eth 0
Connection Type	Static IP
IP Address	192.168.23.150
Netmask	255.255.255.0
Gateway	192.168.23.1
MTU	1500
Primary DNS Server	8.8.8.8
Secondary DNS Server	223.5.5.5
Enable NAT	<input checked="" type="checkbox"/>

Figure 3-4-1-1

Item	Description	Default
Port	The port that is fixed as eth0 port and enabled.	eth 0
Connection Type	Select from "Static IP", "DHCP Client" and "PPPoE".	DHCP
MTU	Set the maximum transmission unit.	1500
Primary DNS Server	Set the primary DNS.	8.8.8.8
Secondary DNS Server	Set the secondary DNS.	223.5.5.5
Enable NAT	Enable or disable NAT function. When enabled, a private IP can be translated to a public IP.	Enable

Table 3-4-1-1 Port Parameters

Related Configuration Example

[Ethernet Connection](#)

1. Static IP Configuration

If the external network assigns a fixed IP for the Ethernet port, user can select "Static IP" mode.

The screenshot shows the configuration page for 'Port_1'. The 'Connection Type' is set to 'Static IP'. The following fields are filled with their respective values:

- Port: eth 0
- Connection Type: Static IP
- IP Address: 192.168.23.150
- Netmask: 255.255.255.0
- Gateway: 192.168.23.1
- MTU: 1500
- Primary DNS Server: 8.8.8.8
- Secondary DNS Server: 223.5.5.5
- Enable NAT:

Below these fields is a section for 'Multiple IP Address' with a table header: IP Address, Netmask, and Operation. A plus sign (+) button is visible at the bottom right of this section.


Figure 3-4-1-2

Static IP		
Item	Description	Default
IP Address	Set the IP address which can access Internet.	192.168.23.150
Netmask	Set the Netmask for Ethernet port.	255.255.255.0
Gateway	Set the gateway's IP address for Ethernet port.	192.168.23.1
Multiple IP Address	Set the multiple IP addresses for Ethernet port.	Null

Table 3-4-1-2 Static IP Parameters

2. DHCP Client

If the external network has DHCP server enabled and has assigned IP addresses to the Ethernet WAN interface, user can select “DHCP client” mode to obtain IP address automatically.

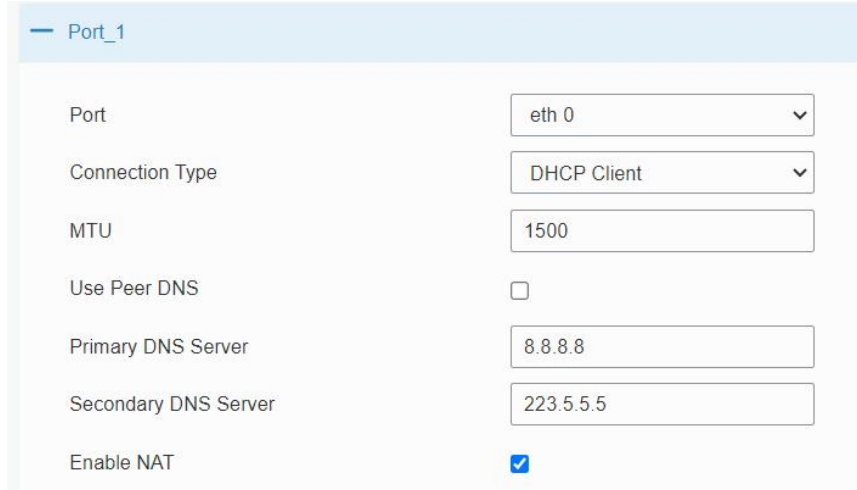

The screenshot shows the configuration for 'Port_1'. The settings are as follows:

Parameter	Value
Port	eth 0
Connection Type	DHCP Client
MTU	1500
Use Peer DNS	<input type="checkbox"/>
Primary DNS Server	8.8.8.8
Secondary DNS Server	223.5.5.5
Enable NAT	<input checked="" type="checkbox"/>


Figure 3-4-1-3

DHCP Client	
Item	Description
Use Peer DNS	Obtain peer DNS automatically during PPP dialing. DNS is necessary when user visits domain name.

Table 3-4-1-3 DHCP Client Parameters

3. PPPoE

PPPoE refers to a point to point protocol over Ethernet. User has to install a PPPoE client on the basis of original connection way. With PPPoE, remote access devices can get control of each user.

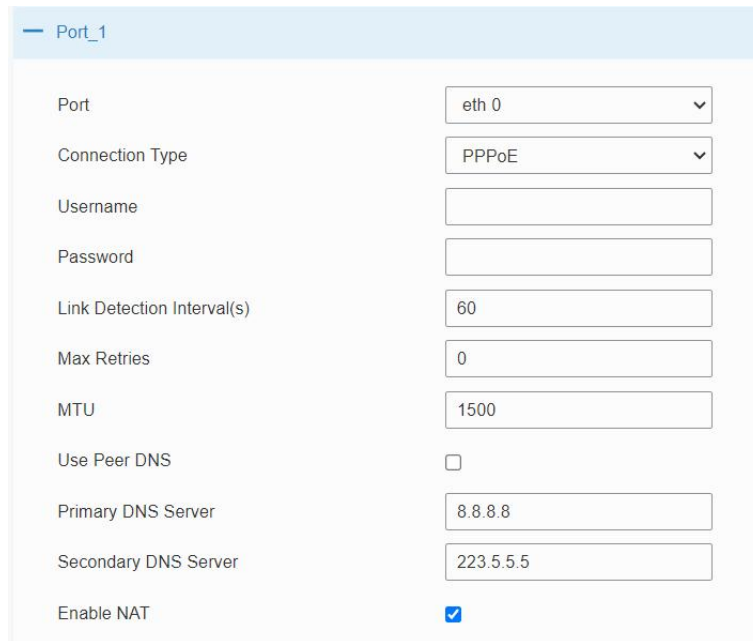

Port_1

Port: eth 0

Connection Type: PPPoE

Username:

Password:

Link Detection Interval(s): 60

Max Retries: 0

MTU: 1500

Use Peer DNS:

Primary DNS Server: 8.8.8.8

Secondary DNS Server: 223.5.5.5

Enable NAT:

Figure 3-4-1-4

PPPoE	
Item	Description
Username	Enter the username provided by your Internet Service Provider (ISP).
Password	Enter the password provided by your Internet Service Provider (ISP).
Link Detection Interval (s)	Set the heartbeat interval for link detection. Range: 1-600.
Max Retries	Set the maximum retry times after it fails to dial up. Range: 0-9.
Use Peer DNS	Obtain peer DNS automatically during PPP dialing. DNS is necessary when user visits domain name.

Table 3-4-1-4 PPOE Parameters

3.4.1.2 WLAN

This section explains how to set the related parameters for Wi-Fi network. UG65 supports 802.11 b/g/n, as AP or client mode.

WLAN

Enable

Work Mode

SSID Broadcast

AP Isolation

Radio Type

Channel

SSID

BSSID

Encryption Mode

Bandwidth

Max Client Number

IP Setting

Protocol

IP Address

[DHCP Settings](#)

Netmask

Figure 3-4-1-5

WLAN

Enable

Work Mode

SSID

BSSID

Encryption Mode

Cipher

Key

IP Setting

Protocol

IP Address

Netmask

Gateway

Figure 3-4-1-6

WLAN	
Item	Description

Enable	Enable/disable WLAN.
Work Mode	Select work mode. The options are "Client" or "AP".
AP Mode	
BSSID	Show the MAC address of this WLAN interface.
Radio Type	Select Radio type. The options are "802.11b (2.4 GHz)", "802.11g (2.4 GHz)", "802.11n (2.4 GHz)".
Channel	Select wireless channel. The options are "Auto", "1", "2"....."11".
Bandwidth	Select bandwidth. The options are "20MHz" and "40MHz".
SSID	Fill in the SSID of the access point.
Encryption Mode	Select encryption mode. The options are "No Encryption", "WEP Open System", "WEP Shared Key", "WPA-PSK", "WPA2-PSK" and "WPA-PSK/WPA2-PSK".
Cipher	Select cipher of WPA encryption. The options are "Auto", "AES", "TKIP" and "AES/TKIP".
Key	Fill the key to connect to this access point. The default key is iotpassword .
Max Client Number	Set the maximum number of clients to access.
IP Setting	
Protocol	It's fixed as Static IP.
IP Address	Set the IP address in wireless network.
Netmask	Set the netmask in wireless network.
Client Mode	
Scan	Click to scan the access points around this device.
SSID	Fill in the SSID of the access point.
BSSID	Fill in the MAC address of the access point. Either SSID or BSSID can be filled to join the network.
Encryption Mode	Select encryption mode. The options are "No Encryption", "WEP Open System", "WEP Shared Key", "WPA-PSK", "WPA2-PSK", "WPA-PSK/WPA2-PSK", "WPA-Enterprise", "WPA2-Enterprise" and "WPA-Enterprise/WPA2-Enterprise".
Cipher	Select cipher of WPA encryption. The options are "Auto", "AES", "TKIP" and "AES/TKIP".
Key	Fill the key to connect to this access point.
Xsupplicant Type	Select from "Peap", "Leap", "TLS" and "TTLS".
User	Fill the username of WPA/WPA2-Enterprise.
Anonymous Identity	Fill the anonymous identity of WPA/WPA2-Enterprise.
Phase 2	Fill the phase of WPA/WPA2-Enterprise.
Public Server Certificate	The public server certificate used for verifying with WPA/WPA2-Enterprise access point.
IP Setting	
Protocol	Set the protocol to get the WLAN IP address.

IP Address	Set the IP address in wireless network when protocol is Static IP.
Netmask	Set the netmask in wireless network when protocol is Static IP.
Gateway	Set the gateway in wireless network when protocol is Static IP.
Primary DNS Server	Set the primary IPv4 DNS server.
Secondary DNS Server	Set the secondary IPv4 DNS server.

Table 3-4-1-5 WLAN Parameters

Port	WLAN	Cellular	Loopback				
< GoBack							
SSID	Channel	Signal	Cipher	BSSID	Security	Frequency	
Vison Sensor_006602	Auto	-94dBm	Auto	24:e1:24:00:66:02	No Encryption	2462MHz	Join Network
Milesight_Test	Auto	-88dBm	AES	ec:26:ca:99:3a:a4	WPA-PSK/WPA2-PSK	2437MHz	Join Network

Figure 3-4-1-7

Client Mode-Scan	
SSID	Show SSID.
Channel	Show wireless channel.
Signal	Show wireless signal.
BSSID	Show the MAC address of the access point.
Security	Show the encryption mode.
Frequency	Show the frequency of radio.
Join Network	Click the button to join the wireless network.

Table 3-4-1-6 WLAN Scan Parameters

Related Topic

[Wi-Fi Application Example](#)

3.4.1.3 Cellular (Cellular Version Only)

This section explains how to set the related parameters for cellular network.

Cellular Setting

Enable

Protocol Type

Network Type

APN

Username

Password

Access Number

PIN Code

Authentication Type

Roaming

Customize MTU

MTU

Custom Subnet Mask

Custom DNS Server

Enable IMS

SMS Center

Figure 3-4-1-8

Connection Setting

Enable NAT

Restart When Dial-up failed

ICMP Server

Secondary ICMP Server

ICMP Detection Max Retries

ICMP Detection Timeout s

ICMP Detection Interval s

SMS Settings

SMS Mode

Figure 3-4-1-9

General Settings

Item	Description
------	-------------

Enable	Check the option to enable cellular feature.
Protocol Type	Select the type from IPv4 or IPv4/IPv6.
Network Type	Select from "Auto", "Auto 3G/4G", "4G Only" and "3G Only". Auto: connect to the network with the strongest signal automatically. 4G Only: connect to 4G network only. And so on.
APN	Enter the Access Point Name for cellular dial-up connection provided by local ISP.
Username	Enter the username for cellular dial-up connection provided by local ISP.
Password	Enter the password for cellular dial-up connection provided by local ISP.
Access Number	Enter the dial-up center NO. For cellular dial-up connection provided by local ISP.
PIN Code	Enter a 4-8 characters PIN code to unlock the SIM.
Authentication Type	Select from "None", "PAP", "CHAP".
Roaming	Enable or disable roaming.
Customize MTU	Enable or disable to customize the maximum transmission units. When disabled, the device will use operator's MTU settings.
MTU	Set the maximum transmission units if Customize MTU is enabled. Range: 68-1500.
Custom Subnet Mask	Customize the cellular subnet mask. If blank, the device will use the subnet mask provided by the cellular base station. Note: this feature is only supported by parts of cellular modules.
Custom DNS Server	Customize the cellular DNS server. If blank, the device will use the DNS server provided by the cellular provider.
Enable IMS	Enable or disable IMS function.
SMS Center	Enter the local SMS center number for storing, forwarding, converting and delivering SMS message. Note: This feature is only supported by parts of cellular modules.
Enable NAT	Enable or disable NAT function.
Restart When Dial-up failed	When enabled, the gateway automatically restarts if dial-up fails multiple times.
ICMP Server	Set the ICMP detection server's IP address. Note: Contact your ISP to confirm whether ping detection is allowed and to obtain the correct ICMP server addresses. If ping detection is not allowed, leave this sever address blank.
Secondary ICMP Server	Set the secondary ICMP detection server's IP address.
ICMP Detection Max Retries	Set max number of retries when ICMP detection fails.

ICMP Detection Timeout	Set timeout of ICMP detection.
ICMP Detection Interval	Set interval of ICMP detection.
SMS Mode	Select SMS mode from "TEXT" and "PDU".

Table 3-4-1-7 Cellular Parameters

Figure 3-4-1-10

Item	Description
Connection Mode	
Connection Mode	Select from "Always Online" and "Connect on Demand".
Redial Interval(s)	Set the time interval between redials. Range: 0-3600.
Max Idle Time(s)	Set the maximum duration of the gateway when current link is under idle status. Range: 10-3600.
Triggered by Call	The gateway will switch from offline mode to cellular network mode automatically when it receives a call from the specific phone number.
Call Group	Select a call group for call trigger. Go to System > General Settings > Phone to set up phone group.
Triggered by SMS	The gateway will switch from offline mode to cellular network mode automatically when it receives a specific SMS from the specific mobile phone.
SMS Group	Select a SMS group for trigger. Go to System > General Settings > Phone to set up SMS group.
SMS Text	Fill in the SMS content for triggering.

Table 3-4-1-8 Cellular Parameters

Related Topics

[Cellular Connection Application Example](#)

[Phone Group](#)

3.4.1.4 Loopback

Loopback interface is used for replacing gateway's ID as long as it is activated. When the interface is DOWN, the ID of the gateway has to be selected again which leads to long convergence time of OSPF. Therefore, Loopback interface is generally recommended as

the ID of the gateway.

Loopback interface is a logic and virtual interface on gateway. Under default conditions, there's no loopback interface on gateway, but it can be created as required.

Figure 3-4-1-11

Loopback		
Item	Description	Default
IP Address	Unalterable	127.0.0.1
Netmask	Unalterable	255.0.0.0
Multiple IP Addresses	Apart from the IP above, user can configure other IP addresses.	Null

Table 3-4-1-9 Loopback Parameters

3.4.1.5 VLAN Trunk

UG65 gateway supports the Ethernet port working as VLAN Trunk client and be assigned a VLAN ID, which easy to traffic classification. When VLAN ID is set, port on **“Network” > “Interface” > “Port”** can be chosen as eth0.x with x being VLAN ID. VLAN Setting is blank


by default, you can add a new VLAN label to certain interface by clicking .

Figure 3-4-1-12

VLAN Trunk	
Item	Description
Interface	Select the VLAN interface, it's fixed as eth0.
VID	Set the label ID of the VLAN. Range: 1-4094.

Table 3-4-1-10 VLAN Trunk Parameters

3.4.2 Firewall

This section describes how to set the firewall parameters, including website block, ACL, DMZ, Port Mapping and MAC Binding.

The firewall implements corresponding control of data flow at entry direction (from Internet to local area network) and exit direction (from local area network to Internet) according to the content features of packets, such as protocol style, source/destination IP address, etc. It ensures that the gateway operate in a safe environment and host in local area network.

3.4.2.1 Security

Figure 3-4-2-1

Website Blocking	
URL Address	Enter the HTTP address which you want to block.
Keyword	You can block specific website by entering keyword. The maximum number of character allowed is 64.

Table 3-2-2-1 Security Parameters

3.4.2.2 ACL

Access control list, also called ACL, implements permission or prohibition of access for specified network traffic (such as the source IP address) by configuring a series of matching rules so as to filter the network interface traffic. When gateway receives packet, the field will be analyzed according to the ACL rule applied to the current interface. After the special packet is identified, the permission or prohibition of corresponding packet will be implemented according to preset strategy.

The data package matching rules defined by ACL can also be used by other functions requiring flow distinction.

ACL Setting

Default Filter Policy:

Access Control List

Type:

ID:

Action:

Protocol:

Source IP:

Source Wildcard Mask:

Destination IP:

Destination Wildcard Mask:

Description:

Interface List

Interface	In ACL	Out ACL	Operation
			<input type="button" value="+"/>

Figure 3-4-2-2

Item	Description
ACL Setting	
Default Filter Policy	Select from "Accept" and "Deny". The packets which are not included in the access control list will be processed by the default filter policy.
Access Control List	
Type	Select type from "Extended" and "Standard".
ID	User-defined ACL number. Range: 1-199.
Action	Select from "Permit" and "Deny".
Protocol	Select protocol from "ip", "icmp", "tcp", "udp", and "1-255".
Source IP	Source network address (leaving it blank means all).
Source Wildcard Mask	Wildcard mask of the source network address.
Destination IP	Destination network address (0.0.0.0 means all).
Destination Wildcard Mask	Wildcard mask of destination address.
Description	Fill in a description for the groups with the same ID.
ICMP Type	Enter the type of ICMP packet. Range: 0-255.
ICMP Code	Enter the code of ICMP packet. Range: 0-255.
Source Port Type	Select source port type, such as specified port, port range, etc.
Source Port	Set source port number. Range: 1-65535.
Start Source Port	Set start source port number. Range: 1-65535.
End Source Port	Set end source port number. Range: 1-65535.

Destination Port Type	Select destination port type, such as specified port, port range, etc.
Destination Port	Set destination port number. Range: 1-65535.
Start Destination Port	Set start destination port number. Range: 1-65535.
End Destination Port	Set end destination port number. Range: 1-65535.
More Details	Show information of the port.
Interface List	
Interface	Select network interface for access control.
In ACL	Select a rule for incoming traffic from ACL ID.
Out ACL	Select a rule for outgoing traffic from ACL ID.

Table 3-4-2-2 ACL Parameters

3.4.2.4 Port Mapping (DNAT)

When external services are needed internally (for example, when a website is published externally), the external address initiates an active connection. And, the router or the gateway on the firewall receives the connection. Then it will convert the connection into the an internal connection. This conversion is called DNAT, which is mainly used for external and interval services.

Click  to add a new port mapping rules.





Source IP	Source Port	Destination IP	Destination Port	Protocol	Description	Operation
0.0.0.0/0				TCP		
						

Figure 3-4-2-4

Port Mapping	
Item	Description
Source IP	Specify the host or network which can access local IP address. 0.0.0.0/0 means all.
Source Port	Enter the TCP or UDP port from which incoming packets are forwarded. Range: 1-65535.
Destination IP	Enter the IP address that packets are forwarded to after being received on the incoming interface.
Destination Port	Enter the TCP or UDP port that packets are forwarded to after being received on the incoming port(s). Range: 1-65535.
Protocol	Select from "TCP" and "UDP" as your application required.
Description	The description of this rule.

Table 3-4-2-4 Port Mapping Parameters

Related Configuration Example

[NAT Application Example](#)

3.4.2.3 DMZ

DMZ is a host within the internal network that has all ports exposed, except those forwarded ports in port mapping.

Figure 3-4-2-3

DMZ	
Item	Description
Enable	Enable or disable DMZ.
DMZ Host	Enter the IP address of the DMZ host on the internal network.
Source Address	Set the source IP address which can access to DMZ host. "0.0.0.0/0" means any address.

Table 3-4-2-3 DMZ Parameters

3.4.2.5 MAC Binding

MAC Binding is used for specifying hosts by matching MAC addresses and IP addresses that are in the list of allowed outer network access.

Figure 3-4-2-5

MAC Binding List	
Item	Description
MAC Address	Set the binding MAC address.
IP Address	Set the binding IP address.
Description	Fill in a description for convenience of recording the meaning of the binding rule for each piece of MAC-IP.

Table 3-4-2-5 MAC Binding Parameters

3.4.3 DHCP

UG65 can be set as a DHCP server to distribute IP address when Wi-Fi work as AP mode.

DHCP Server

DHCP Server_1

Enable

Interface

Start Address

End Address

Netmask

Lease Time (Min)

Primary DNS Server

Secondary DNS Server

Windows Name Server

Static IP

MAC Address	IP Address	Operation
		<input style="float: right;" type="button" value="+"/>

Figure 3-4-3-1

DHCP Server		
Item	Description	Default
Enable	Enable or disable DHCP server.	Enable
Interface	Only wlan interface is allowed to distribute IP addresses.	wlan0
Start Address	Define the beginning of the pool of IP addresses which will be leased to DHCP clients.	192.168.1.100
End Address	Define the end of the pool of IP addresses which will be leased to DHCP clients.	192.168.1.199
Netmask	Define the subnet mask of IP address obtained by DHCP clients from DHCP server.	255.255.255.0
Lease Time (Min)	Set the lease time on which the client can use the IP address obtained from DHCP server. Range: 1-10080.	1440
Primary DNS Server	Set the primary DNS server.	8.8.8.8
Secondary DNS Server	Set the secondary DNS server.	Null
Windows Name	Define the Windows Internet Naming Service obtained by DHCP clients from DHCP sever. Generally you can	Null

Server	leave it blank.	
Static IP		
MAC Address	Set a static and specific MAC address for the DHCP client (it should be different from other MACs so as to avoid conflict).	Null
IP Address	Set a static and specific IP address for the DHCP client (it should be outside of the DHCP range).	Null

Table 3-4-3-1 DHCP Server Parameters

3.4.4 DDNS

Dynamic DNS (DDNS) is a method that automatically updates a name server in the Domain Name System, which allows user to alias a dynamic IP address to a static domain name. DDNS serves as a client tool and needs to coordinate with DDNS server. Before starting configuration, user shall register on a website of proper domain name provider and apply for a domain name.

Figure 3-4-4-1

DDNS	
Item	Description
Name	Give the DDNS a descriptive name.
Interface	Set interface bundled with the DDNS.
Service Type	Select the DDNS service provider.
Username	Enter the username for DDNS register.
User ID	Enter User ID of the custom DDNS server.
Password	Enter the password for DDNS register.
Server	Enter the name of DDNS server.
Hostname	Enter the hostname for DDNS.
Append IP	Append your current IP to the DDNS server update path.

Table 3-4-4-1 DDNS Parameters

3.4.5 Link Failover

This section describes how to configure link failover strategies, such as VRRP strategies.

Configuration Steps

1. Define one or more SLA operations (ICMP probe).
2. Define one or more track objects to track the status of SLA operation.
3. Define applications associated with track objects, such as VRRP or static routing.

3.4.5.1 SLA

SLA setting is used for configuring link probe method. The default probe type is ICMP.

ID	Type	Destination Address	Secondary Destination Address	Data Size	Interval(s)	Timeout(ms)	Packet Loss Count	Start Time	Operation
1	icmp-echo	8.8.8.8	223.5.5.5	56	15	5000	3	now	X

Figure 3-4-5-1

SLA		
Item	Description	Default
ID	SLA index. Up to 10 SLA settings can be added. Range: 1-10.	1
Type	ICMP-ECHO is the default type to detect if the link is alive.	icmp-echo
Destination Address	The detected IP address.	8.8.8.8
Secondary Destination Address	The secondary detected IP address.	223.5.5.5
Data Size	User-defined data size. Range: 0-1000.	56
Interval (s)	User-defined detection interval. Range: 1-608400.	30
Timeout (ms)	User-defined timeout for response to determine ICMP detection failure. Range: 1-300000.	5000
Packet Loss Count	Define packet loss count in each SLA probe. SLA probe fails when the preset packet loss count is exceeded.	5
Start Time	Detection start time; select from "Now" and blank character. Blank character means this SLA detection doesn't start.	now

Table 3-4-5-1 SLA Parameters

3.4.5.2 Track

Track setting is designed for achieving linkage among SLA module, Track module and Application module. Track setting is located between application module and SLA module with main function of shielding the differences of various SLA modules and providing unified interfaces for application module.

Linkage between Track Module and SLA module

Once you complete the configuration, the linkage relationship between Track module and SLA module will be established. SLA module is used for detection of link status, network performance and notification of Track module. The detection results help track status change timely.

- For successful detection, the corresponding track item is Positive.
- For failed detection, the corresponding track item is Negative.

Linkage between Track Module and Application Module

After configuration, the linkage relationship between Track module and Application module will be established. When any change occurs in track item, a notification that requires corresponding treatment will be sent to Application module.

Currently, the application modules like VRRP and static routing can get linkage with track module.

If it sends an instant notification to Application module, the communication may be interrupted in some circumstances due to routing's failure like timely restoration or other reasons. Therefore, user can set up a period of time to delay notifying application module when the track item status changes.

ID	Type	SLA ID	Interface	Negative Delay(s)	Positive Delay(s)	Operation
1	sla	1	wlan0	0	1	✕
						+

Figure 3-4-5-2

Item	Description	Default
Index	Track index. Up to 10 track settings can be configured. Range: 1-10.	1
Type	The options are "sla" and "interface".	SLA
SLA ID	Defined SLA ID.	1
Interface	Select the interface whose status will be detected.	cellular0
Negative Delay (s)	When interface is down or SLA probing fails, it will wait according to the time set here before actually changing its status to Down. Range: 0-180 (0 refers to immediate switching).	0
Positive Delay (s)	When failure recovery occurs, it will wait according to the time set here before actually changing its status to Up. Range: 0-180 (0 refers to immediate switching).	1

Table 3-4-5-2 Track Parameters

3.4.5.3 WAN Failover

WAN failover refers to failover between Ethernet WAN interface and cellular interface. When service transmission can't be carried out normally due to malfunction of a certain interface or lack of bandwidth, the rate of flow can be switched to backup interface quickly. Then the backup interface will carry out service transmission and share network flow so as

to improve reliability of communication of data equipment.

When link state of main interface is switched from up to down, system will have the pre-set delay works instead of switching to link of backup interface immediately. Only if the state of main interface is still down after delay, will the system switch to link of backup interface. Otherwise, system will remain unchanged.

Main Interface	Backup Interface	Startup Delay(s)	Up Delay(s)	Down Delay(s)	Track ID	Operation
Cellular 0	eth 0	30	0	0	1	X
+						

Figure 3-4-5-3

WAN Failover		
Parameters	Description	Default
Main Interface	Select a link interface as the main link.	--
Backup Interface	Select a link interface as the backup link.	--
Startup Delay (s)	Set how long to wait for the startup tracking detection policy to take effect. Range: 0-300.	30
Up Delay (s)	When the primary interface switches from failed detection to successful detection, switching can be delayed based on the set time. Range: 0-180 (0 refers to immediate switching)	0
Down Delay (s)	When the primary interface switches from successful detection to failed detection, switching can be delayed based on the set time. Range: 0-180 (0 refers to immediate switching).	0
Track ID	Track detection, select the defined track ID.	--

Table 3-4-5-3 WAN Failover Parameters

3.4.6 VPN

Virtual Private Networks, also called VPNs, are used to securely connect two private networks together so that devices can connect from one network to the other network via secure channels.

UG65 supports DMVPN, IPsec, GRE, L2TP, PPTP, OpenVPN, as well as GRE over IPsec and L2TP over IPsec.

3.4.6.1 DMVPN

A dynamic multi-point virtual private network (DMVPN), combining mGRE and IPsec, is a secure network that exchanges data between sites without passing traffic through an organization's headquarter VPN server or gateway.

DMVPN Settings










Enable	<input checked="" type="checkbox"/>
Hub Address	<input type="text"/>
Local IP Address	<input type="text"/>
GRE HUB IP Address	<input type="text"/>
GRE Local IP Address	<input type="text"/>
GRE Mask	<input type="text" value="255.255.255.0"/>
GRE Key	<input type="text"/> 
Negotiation Mode	<input type="text" value="Main"/> 
Encryption Algorithm	<input type="text" value="AES128"/> 
Authentication Algorithm	<input type="text" value="MD5"/> 
DH Group	<input type="text" value="MODP768-1"/> 
Key	<input type="text"/> 
Local ID Type	<input type="text" value="Default"/> 
IKE Life Time(s)	<input type="text" value="10800"/>
SAAlgorithm	<input type="text" value="DES-MD5"/> 
PFS Group	<input type="text" value="NULL"/> 
Life Time(s)	<input type="text" value="3600"/>

Figure 3-4-6-1


DPD Time Interval(s)	<input type="text" value="30"/>
DPD Timeout(s)	<input type="text" value="150"/>
Cisco Secret	<input type="text"/> 
NHRP Holdtime(s)	<input type="text" value="7200"/>

Figure 3-4-6-2

DMVPN	
Item	Description
Enable	Enable or disable DMVPN.
Hub Address	The IP address or domain name of DMVPN Hub.
Local IP address	DMVPN local tunnel IP address.
GRE Hub IP Address	GRE Hub tunnel IP address.
GRE Local IP Address	GRE local tunnel IP address.
GRE Netmask	GRE local tunnel netmask.

GRE Key	GRE tunnel key.
Negotiation Mode	Select from "Main" and "Aggressive".
Encryption Algorithm	Select from "DES", "3DES", "AES128", "AES192" and "AES256".
Authentication Algorithm	Select from "MD5" and "SHA1".
DH Group	Select from "MODP768_1", "MODP1024_2" and "MODP1536_5".
Key	Enter the preshared key.
Local ID Type	Select from "Default", "ID", "FQDN", and "User FQDN"
IKE Life Time (s)	Set the lifetime in IKE negotiation. Range: 60-86400.
SA Algorithm	Select from "DES_MD5", "DES_SHA1", "3DES_MD5", "3DES_SHA1", "AES128_MD5", "AES128_SHA1", "AES192_MD5", "AES192_SHA1", "AES256_MD5" and "AES256_SHA1".
PFS Group	Select from "NULL", "MODP768_1", "MODP1024_2" and "MODP1536-5".
Life Time (s)	Set the lifetime of IPsec SA. Range: 60-86400.
DPD Interval Time (s)	Set DPD interval time
DPD Timeout (s)	Set DPD timeout.
Cisco Secret	Cisco Nhrp key.
NHRP Holdtime (s)	The holdtime of Nhrp protocol.

Table 3-4-6-1 DMVPN Parameters

3.4.6.2 IPsec

IPsec is especially useful for implementing virtual private networks and for remote user access through dial-up connection to private networks. A big advantage of IPsec is that security arrangements can be handled without requiring changes to individual user computers.

IPsec provides three choices of security service: Authentication Header (AH), Encapsulating Security Payload (ESP), and Internet Key Exchange (IKE). AH essentially allows authentication of the senders' data. ESP supports both authentication of the sender and data encryption. IKE is used for cipher code exchange. All of them can protect one and more data flows between hosts, between host and gateway, and between gateways.

IPsec Settings

— IPsec_1

Enable

IPsec Gateway Address

IPsec Mode

IPsec Protocol

Local Subnet

Local Subnet Mask

Local ID Type

Remote Subnet

Remote Subnet Mask

Remote ID Type

Figure 3-4-6-3

IPsec	
Item	Description
Enable	Enable IPsec tunnel. A maximum of 3 tunnels is allowed.
IPsec Gateway Address	Enter the IP address or domain name of remote IPsec server.
IPsec Mode	Select from "Tunnel" and "Transport".
IPsec Protocol	Select from "ESP" and "AH".
Local Subnet	Enter the local subnet IP address that IPsec protects.
Local Subnet Netmask	Enter the local netmask that IPsec protects.
Local ID Type	Select from "Default", "ID", "FQDN", and "User FQDN".
Remote Subnet	Enter the remote subnet IP address that IPsec protects.
Remote Subnet Mask	Enter the remote netmask that IPsec protects.
Remote ID type	Select from "Default", "ID", "FQDN", and "User FQDN".

Table 3-4-6-2 IPsec Parameters

IKE Parameter	<input checked="" type="checkbox"/>
IKE Version	IKEv1
Negotiation Mode	Main
Encryption Algorithm	DES
Authentication Algorithm	MD5
DH Group	MODP768-1
Local Authentication	PSK
Local Secrets	
XAUTH	<input type="checkbox"/>
Lifetime(s)	10800
SA Parameter	<input checked="" type="checkbox"/>
SA Algorithm	DES-MD5
PFS Group	NULL
Lifetime(s)	3600
DPD Time Interval(s)	30
DPD Timeout(s)	150
IPsec Advanced	<input checked="" type="checkbox"/>
Enable Compression	<input type="checkbox"/>
VPN Over IPsec Type	NONE

Figure 3-4-6-4

IKE Parameter	
Item	Description
IKE Version	Select from "IKEv1" and "IKEv2".
Negotiation Mode	Select from "Main" and "Aggressive".
Encryption Algorithm	Select from "DES", "3DES", "AES128", "AES192" and "AES256".
Authentication Algorithm	Select from "MD5" and "SHA1"
DH Group	Select from "MODP768_1", "MODP1024_2", "MODP1536_5", "MODP2048-14", "MODP3072-15", "MODP4096-16", "ECP256-19", "ECP384-20", "ECP521-21".
Local Authentication	Select from "PSK" and "CA".
Local Secrets	Enter the preshared key.
XAUTH	Enter XAUTH username and password after XAUTH is enabled.
Lifetime (s)	Set the lifetime in IKE negotiation. Range: 60-86400.
SA Parameter	
SA Algorithm	Select from "DES_MD5", "DES_SHA1", "3DES_MD5", "3DES_SHA1", "AES128_MD5", "AES128_SHA1", "AES192_MD5", "AES192_SHA1", "AES256_MD5" and "AES256_SHA1".
PFS Group	Select from "NULL", "MODP768_1", "MODP1024_2" and

	"MODP1536_5".
Lifetime (s)	Set the lifetime of IPsec SA. Range: 60-86400.
DPD Interval Time(s)	Set DPD interval time to detect if the remote side fails.
DPD Timeout(s)	Set DPD timeout. Range: 10-3600.
IPsec Advanced	
Enable Compression	The head of IP packet will be compressed after it's enabled.
VPN Over IPsec Type	Select from "NONE", "GRE" and "L2TP" to enable VPN over IPsec function.


Table 3-4-6-3 IPsec Parameters

3.4.6.3 GRE

Generic Routing Encapsulation (GRE) is a protocol that encapsulates packets in order to route other protocols over IP networks. It's a tunneling technology that provides a channel through which encapsulated data message can be transmitted and encapsulation and decapsulation can be realized at both ends.

In the following circumstances the GRE tunnel transmission can be applied:

- GRE tunnel can transmit multicast data packets as if it were a true network interface. Single use of IPsec cannot achieve the encryption of multicast.
- A certain protocol adopted cannot be routed.
- A network of different IP addresses shall be required to connect other two similar networks.

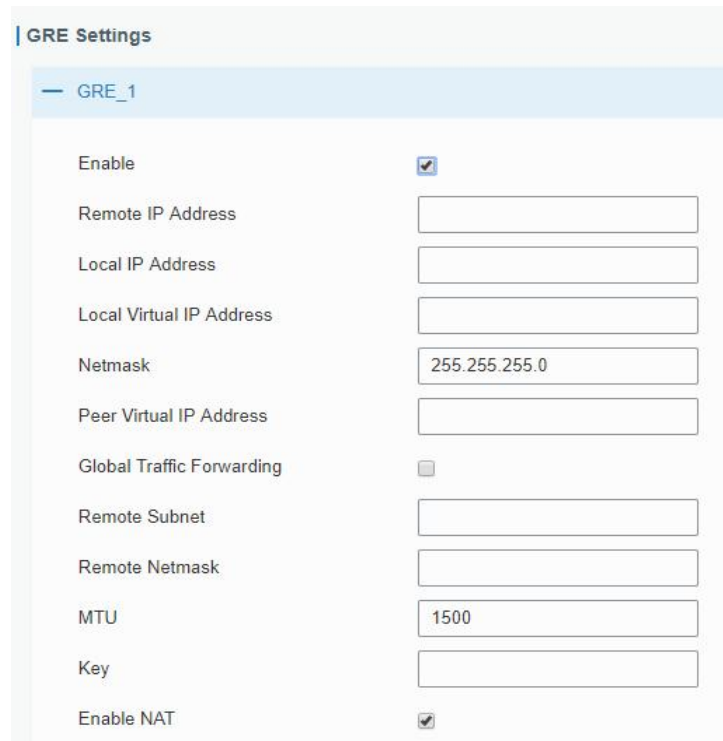

GRE Settings

GRE_1

Enable

Remote IP Address

Local IP Address

Local Virtual IP Address

Netmask

Peer Virtual IP Address

Global Traffic Forwarding

Remote Subnet

Remote Netmask

MTU

Key

Enable NAT

Figure 3-4-6-5


GRE	
Item	Description

Enable	Check to enable GRE function.
Remote IP Address	Enter the real remote IP address of GRE tunnel.
Local IP Address	Set the local IP address.
Local Virtual IP Address	Set the local tunnel IP address of GRE tunnel.
Netmask	Set the local netmask.
Peer Virtual IP Address	Enter remote tunnel IP address of GRE tunnel.
Global Traffic Forwarding	All the data traffic will be sent out via GRE tunnel when this function is enabled.
Remote Subnet	Enter the remote subnet IP address of GRE tunnel.
Remote Netmask	Enter the remote netmask of GRE tunnel.
MTU	Enter the maximum transmission unit. Range: 64-1500.
Key	Set GRE tunnel key.
Enable NAT	Enable NAT traversal function.

Table 3-4-6-4 GRE Parameters

3.4.6.4 L2TP

Layer Two Tunneling Protocol (L2TP) is an extension of the Point-to-Point Tunneling Protocol (PPTP) used by an Internet service provider (ISP) to enable the operation of a virtual private network (VPN) over the Internet.

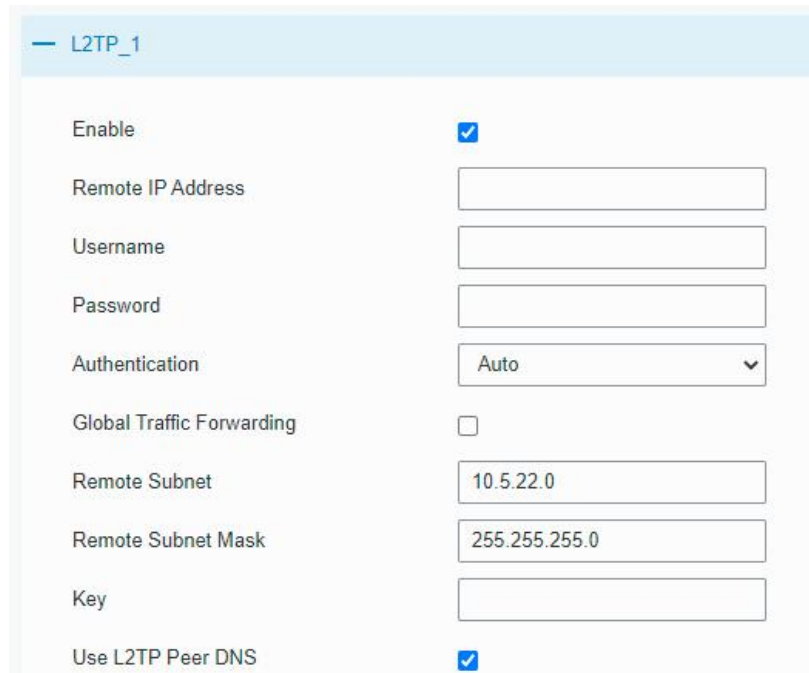

— L2TP_1

Enable

Remote IP Address

Username

Password

Authentication

Global Traffic Forwarding

Remote Subnet

Remote Subnet Mask

Key

Use L2TP Peer DNS

Figure 3-4-6-6

L2TP	
Item	Description
Enable	Check to enable L2TP function.
Remote IP Address	Enter the public IP address or domain name of L2TP server.
Username	Enter the username that L2TP server provides.
Password	Enter the password that L2TP server provides.

Authentication	Select from "Auto", "PAP", "CHAP", "MS-CHAPv1" and "MS-CHAPv2".
Global Traffic Forwarding	All of the data traffic will be sent out via L2TP tunnel after this function is enabled.
Remote Subnet	Enter the remote IP address that L2TP protects.
Remote Subnet Mask	Enter the remote netmask that L2TP protects.
Key	Enter the password of L2TP tunnel.
Use L2TP Peer DNS	Enable to use the DNS address of peer L2TP server .

Table 3-4-6-5 L2TP Parameters

Advanced Settings	<input checked="" type="checkbox"/>
Local IP Address	<input type="text"/>
Peer IP Address	<input type="text"/>
Enable NAT	<input checked="" type="checkbox"/>
Enable MPPE	<input checked="" type="checkbox"/>
Address/Control Compression	<input type="checkbox"/>
Protocol Field Compression	<input type="checkbox"/>
Asyncmap Value	<input type="text" value="ffffff"/>
MRU	<input type="text" value="1500"/>
MTU	<input type="text" value="1500"/>
Link Detection Interval(s)	<input type="text" value="60"/>
Max Retries	<input type="text" value="0"/>
Expert Options	<input type="text"/>

Figure 3-4-6-7

Advanced Settings	
Item	Description
Local IP Address	Set tunnel IP address of L2TP client. Client will obtain tunnel IP address automatically from the server when it's null.
Peer IP Address	Enter tunnel IP address of L2TP server.
Enable NAT	Enable NAT traversal function.
Enable MPPE	Enable MPPE encryption.
Address/Control Compression	For PPP initialization. User can keep the default option.
Protocol Field Compression	For PPP initialization. User can keep the default option.
Asyncmap Value	One of the PPP protocol initialization strings. User can keep the default value. Range: 0-ffffff.
MRU	Set the maximum receive unit. Range: 64-1500.
MTU	Set the maximum transmission unit. Range: 128-1500

Link Detection Interval (s)	Set the link detection interval time to ensure tunnel connection. Range: 0-600.
Max Retries	Set the maximum times of retry to detect the L2TP connection failure. Range: 0-10.
Expert Options	User can enter some other PPP initialization strings in this field and separate the strings with blank space.

Table 3-4-6-6 L2TP Parameters

3.4.6.5 PPTP

Point-to-Point Tunneling Protocol (PPTP) is a protocol that allows corporations to extend their own corporate network through private "tunnels" over the public Internet. Effectively, a corporation uses a wide-area network as a single large local area network.

The screenshot shows the 'PPTP Settings' interface for a configuration named 'PPTP_1'. The settings are as follows:

- Enable:** Checked (checkbox).
- Remote IP Address:** Text input field.
- Username:** Text input field.
- Password:** Text input field.
- Authentication:** Dropdown menu set to 'Auto'.
- Global Traffic Forwarding:** Unchecked (checkbox).
- Remote Subnet:** Text input field.
- Remote Subnet Mask:** Text input field.

Figure 3-4-6-8

PPTP	
Item	Description
Enable	Enable PPTP client. A maximum of 3 tunnels is allowed.
Remote IP Address	Enter the public IP address or domain name of PPTP server.
Username	Enter the username that PPTP server provides.
Password	Enter the password that PPTP server provides.
Authentication	Select from "Auto", "PAP", "CHAP", "MS-CHAPv1", and "MS-CHAPv2".
Global Traffic Forwarding	All of the data traffic will be sent out via PPTP tunnel once enable this function.
Remote Subnet	Set the peer subnet of PPTP.
Remote Subnet Mask	Set the netmask of peer PPTP server.

Table 3-4-6-7 PPTP Parameters

Advanced Settings	<input checked="" type="checkbox"/>
Local IP Address	<input type="text"/>
Peer IP Address	<input type="text"/>
Enable NAT	<input checked="" type="checkbox"/>
Enable MPPE	<input checked="" type="checkbox"/>
Address/Control Compression	<input type="checkbox"/>
Protocol Field Compression	<input type="checkbox"/>
Asyncmap Value	<input type="text" value="ffffff"/>
MRU	<input type="text" value="1500"/>
MTU	<input type="text" value="1500"/>
Link Detection Interval(s)	<input type="text" value="60"/>
Max Retries	<input type="text" value="0"/>
Expert Options	<input type="text"/>

Figure 3-4-6-9

PPTP Advanced Settings	
Item	Description
Local IP Address	Set IP address of PPTP client.
Peer IP Address	Enter tunnel IP address of PPTP server.
Enable NAT	Enable the NAT faction of PPTP.
Enable MPPE	Enable MPPE encryption.
Address/Control Compression	For PPP initialization. User can keep the default option.
Protocol Field Compression	For PPP initialization. User can keep the default option.
Asyncmap Value	One of the PPP protocol initialization strings. User can keep the default value. Range: 0-ffffff.
MRU	Enter the maximum receive unit. Range: 64-1500.
MTU	Enter the maximum transmission unit. Range: 128-1500.
Link Detection Interval (s)	Set the link detection interval time to ensure tunnel connection. Range: 0-600.
Max Retries	Set the maximum times of retrying to detect the PPTP connection failure. Range: 0-10.
Expert Options	User can enter some other PPP initialization strings in this field and separate the strings with blank space.

Table 3-4-6-8 PPTP Parameters

3.4.6.6 OpenVPN Client

OpenVPN is an open source virtual private network (VPN) product that offers a simplified security framework, modular network design, and cross-platform portability. UG65

supports running at most 3 OpenVPN clients at the same time. You can import the ovpn file directly or configure the parameters on this page to set clients.

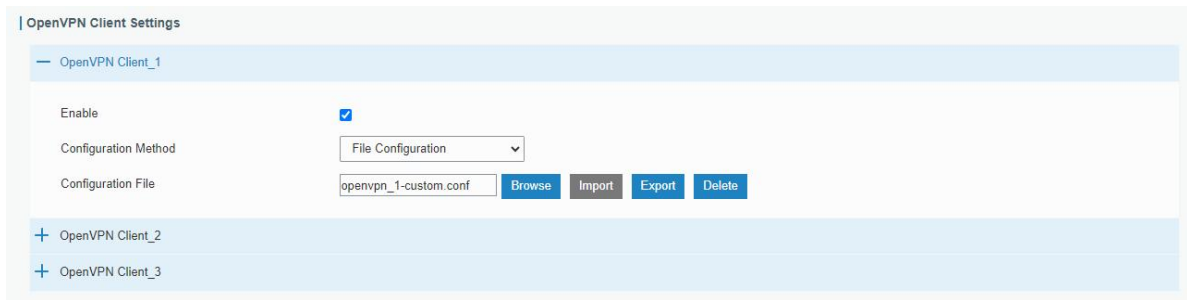


Figure 3-4-6-10

OpenVPN Client - File Configuration	
Item	Description
Browse	Click to browse the client configuration ovpn format file including the settings and certificate contents. Please refer to the client configuration file according to sample: client.conf
Edit	Click to edit the imported file.
Export	Export the server configuration file.
Delete	Click to delete the configuration file.

Table 3-4-6-9 OpenVPN Client Parameters

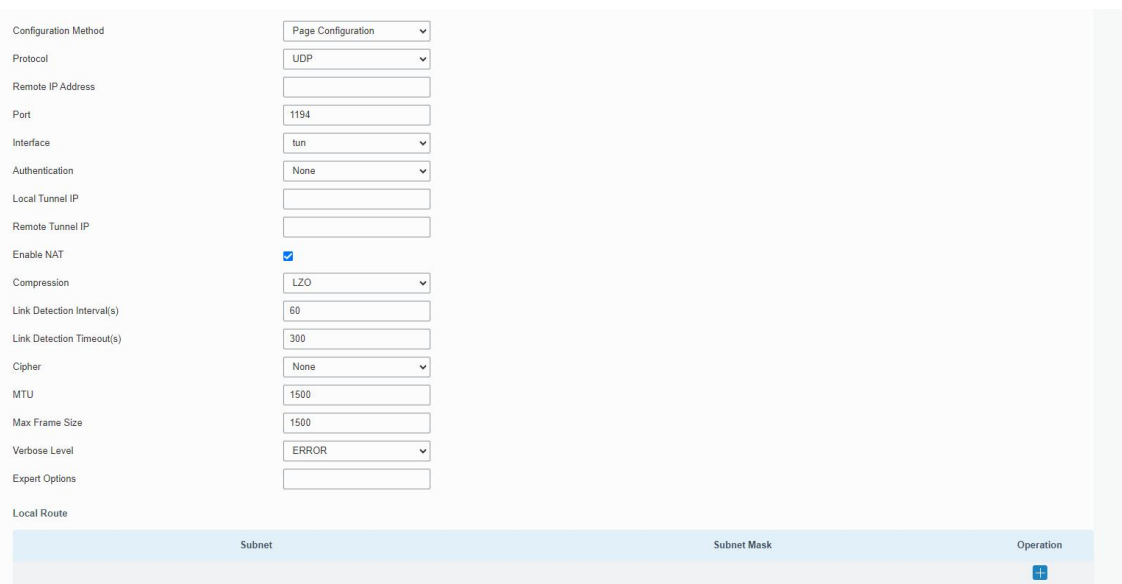


Figure 3-4-6-11

OpenVPN Client - Page Configuration	
Item	Description
Protocol	Select a transport protocol used by connecting UDP and TCP.
Remote IP Address	Enter remote OpenVPN server's IP address or domain name.
Port	Enter the TCP/UCP service number of remote OpenVPN server. Range: 1-65535.
Interface	Select virtual VPN network interface type from TUN and TAP. TUN

	devices encapsulate IPv4 or IPv6 (OSI Layer 3) while TAP devices encapsulate Ethernet 802.3 (OSI Layer 2).
Authentication Type	<p>Select authentication type used to secure data sessions.</p> <p>Pre-shared: use the same secret key as server to complete the authentication. After selecting, go to Network > VPN > Certifications page to import a static.key to PSK field.</p> <p>Username/Password: use username/password which is preset in server side to complete the authentication.</p> <p>X.509 cert: use X.509 type certificate to complete the authentication. After selecting, go to Network > VPN > Certifications page to import CA certificate, client certificate and client private key to corresponding fields.</p> <p>X.509 cert + user: use both username/password and X.509 cert authentication type.</p>
Local Virtual IP	Set local tunnel address when authentication type is None or Pre-shared .
Remote Virtual IP	Set remote tunnel address when authentication type is None or Pre-shared .
Global Traffic Forwarding	All the data traffic will be sent out via OpenVPN tunnel when this function is enabled.
Enable TLS Authentication	<p>Disable or enable TLS authentication when authentication type is X.509 cert. After being enabled, go to Network > VPN > Certifications page to import a ta.key to TA field.</p> <p>Note: this option only supports tls-auth. For tls-crypt, please add this format string on expert option: <code>tls-crypt /etc/openvpn/openvpn-client1-ta.key</code></p>
Compression	Select to enable or disable LZO to compress data.
Link Detection Interval (s)	Set link detection interval time to ensure tunnel connection. If this is set on both server and client, the value pushed from server will override the client local values. Range: 10-1800 s.
Link Detection Timeout (s)	OpenVPN will be reestablished after timeout. If this is set on both server and client, the value pushed from server will override the client local values. Range: 60-3600 s.
Cipher	Select from NONE, BF-CBC, DES-CBC, DES-EDE3-CBC, AES-128-CBC, AES-192-CBC and AES-256-CBC.
MTU	Enter the maximum transmission unit. Range: 128-1500.
Max Frame Size	Set the maximum frame size. Range: 128-1500.
Verbose Level	Select from ERROR, WARING, NOTICE and DEBUG.
Expert Options	<p>User can enter some initialization strings in this field and separate the strings with semicolon.</p> <p>Example: <code>ncp-ciphers AES-128-GCM; key direction 1</code></p>
Local Route	
Subnet	Set the local route's IP address.
Subnet Mask	Set the local route's netmask.

Table 3-4-6-10 OpenVPN Client Parameters

3.4.6.7 OpenVPN Server

UG65 supports OpenVPN server to create secure point-to-point or site-to-site connections in routed or bridged configurations and remote access facilities. You can import the ovpn file directly or configure the parameters on this page to set this server.

Figure 3-4-6-12

OpenVPN Server - File Configuration	
Item	Description
Browse	Click to browse the server configuration ovpn format file including the settings and certificate contents. Please refer to the server configuration file according to sample: server.conf
Edit	Click to edit the imported file.
Export	Export the server configuration file.
Delete	Click to delete the configuration file.

Table 3-4-6-11 OpenVPN Server Parameters

OpenVPN Server Settings

Enable

Configuration Method

Protocol

Port

Listening IP

Interface

Authentication

Local Virtual IP

Remote Virtual IP

Enable NAT

Compression

Link Detection Interval

Link Detection Timeout

Cipher

MTU

Max Frame Size

Verbose Level

Expert Options

Figure 3-4-6-13

Account

Username	Password	Operation
		<input type="button" value="+"/>

Local Route

Subnet	Netmask	Operation
		<input type="button" value="+"/>

Client Subnet

Name	Subnet	Netmask	Operation
			<input type="button" value="+"/>

Figure 3-4-6-14

OpenVPN Server - Page Configuration	
Item	Description
Protocol	Select a transport protocol used by connection from UDP and TCP.
Listening IP	Enter the local hostname or IP address for bind. If left blank, OpenVPN server will bind to all interfaces.
Port	Enter the TCP/UCP service number for OpenVPN client connection.

	Range: 1-65535.
Interface	Select virtual VPN network interface type from TUN and TAP. TUN devices encapsulate IPv4 or IPv6 (OSI Layer 3) while TAP devices encapsulate Ethernet 802.3 (OSI Layer 2).
Authentication Type	Select authentication type used to secure data sessions. Pre-shared: use the same secret key as server to complete the authentication. After select, go to Network > VPN > Certifications page to import a static.key to PSK field. Username/Password: use username/password which is preset in server side to complete the authentication. X.509 cert: use X.509 type certificate to complete the authentication. After select, go to Network > VPN > Certifications page to import CA certificate, client certificate and client private key to corresponding fields. X.509 cert + user: use both username/password and X.509 cert authentication type.
Local Virtual IP	Set local tunnel address when authentication type is None or Pre-shared .
Remote Virtual IP	Set remote tunnel address when authentication type is None or Pre-shared .
Client Subnet	Define an IP address pool for openVPN client.
Client Netmask	Set the client subnet netmask to limit the IP address range.
Renegotiation Interval	Renegotiate data channel key after this interval. 0 means disable.
Max Clients	Limit server to a maximum of concurrent clients, range: 1-20. Note: please adjust log severity to Info if you need to connect many clients.
Enable CRL	Enable or disable CRL verify.
Enable Client to Client	When enabled, openVPN clients can communicate with each other.
Enable Dup Client	Allow multiple clients to connect with the same common name or certification.
Enable TLS Authentication	Disable or enable TLS authentication when authentication type is X.509 cert. After being enabled, go to Network > VPN > Certifications page to import a ta.key to TA field. Note: this option only supports tls-auth. For tls-crypt, please add this format string on expert option: tls-crypt /etc/openvpn/openvpn-client1-ta.key
Compression	Select to enable or disable LZO to compress data.
Link Detection Interval (s)	Set link detection interval time to ensure tunnel connection. If this is set on both server and client, the value pushed from server will override the client local values. Range: 10-1800 s.
Link Detection Timeout (s)	OpenVPN will be reestablished after timeout. If this is set on both server and client, the value pushed from server will override the client local values. Range: 60-3600 s.
Cipher	Select from NONE, BF-CBC, DES-CBC, DES-EDE3-CBC, AES-128-CBC, AES-192-CBC and AES-256-CBC.
MTU	Enter the maximum transmission unit. Range: 64-1500.

Max Frame Size	Set the maximum frame size. Range: 64-1500.
Verbose Level	Select from ERROR, WARING, NOTICE and DEBUG.
Expert Options	User can enter some initialization strings in this field and separate the strings with semicolon. Example: ncp-ciphers AES-128-GCM; key direction 1
Account	
Username & Password	Set username and password for OpenVPN client when authentication type is username/password.
Local Route	
Subnet	Set the local route's IP address.
Subnet Mask	Set the local route's netmask.
Client Subnet	
Name	Set the name as OpenVPN client certificate common name.
Subnet	Set the subnet of OpenVPN client.
Subnet Mask	Set the subnet netmask of OpenVPN client.

Table 3-4-6-12 OpenVPN Server Parameters

3.4.6.8 Certifications

When working as OpenVPN server, OpenVPN client or IPsec Server, user can import/export necessary certificate and key files to this page according to the authentication types.

The screenshot shows the 'OpenVPN Client' configuration interface. It features a list of client entries: 'OpenVPN client_1' (expanded), 'OpenVPN client_2', and 'OpenVPN client_3'. The expanded entry for 'OpenVPN client_1' displays a table of fields for certificate and key management:

Field	Input	Buttons
CA	<input type="text"/>	Browse, Import, Export, Delete
Public Key	<input type="text"/>	Browse, Import, Export, Delete
Private Key	<input type="text"/>	Browse, Import, Export, Delete
TA	<input type="text"/>	Browse, Import, Export, Delete
Preshared Key	<input type="text"/>	Browse, Import, Export, Delete
PKCS12	<input type="text"/>	Browse, Import, Export, Delete

Figure 3-4-6-15

OpenVPN Server

— OpenVPN Server

CA	<input type="text"/>	Browse	Import	Export	Delete
Public Key	<input type="text"/>	Browse	Import	Export	Delete
Private Key	<input type="text"/>	Browse	Import	Export	Delete
DH	<input type="text"/>	Browse	Import	Export	Delete
TA	<input type="text"/>	Browse	Import	Export	Delete
CRL	<input type="text"/>	Browse	Import	Export	Delete
Preshared Key	<input type="text"/>	Browse	Import	Export	Delete

Figure 3-4-6-16

IPsec

— IPsec_1

CA	<input type="text"/>	Browse	Import	Export	Delete
Client Key	<input type="text"/>	Browse	Import	Export	Delete
Server Key	<input type="text"/>	Browse	Import	Export	Delete
Private Key	<input type="text"/>	Browse	Import	Export	Delete
CRL	<input type="text"/>	Browse	Import	Export	Delete

Figure 3-4-6-17

3.4.6.9 WireGuard

WireGuard is an extremely simple yet fast and modern VPN that utilizes state-of-the-art cryptography. WireGuard passes traffic over UDP protocol.

— WireGuard_1

Enable	<input checked="" type="checkbox"/>
Interface	wg0
Customized Private Key	<input checked="" type="checkbox"/>
Private Key	<input type="text" value=""/>
Public Key	F8xRHUqMQ0fgJTw4V4M7gvm
IP Address	<input type="text" value=""/>
Listening Port	<input type="text" value=""/>
DNS	<input type="text" value=""/>
MTU	<input type="text" value=""/>

Peer	Public Key	Allowed IP	Endpoint Address	Operation
+				

Figure 3-4-6-18

WireGuard	
Item	Description
Enable	Enable WireGuard interface. A maximum of 3 WireGaurd interfaces is allowed.
Interface	Show the WireGuard interface name.
Customized Private Key	Enable or disable to customize the private key of this WireGuard interface. If disabled, the client will use the private key generated by this router.
Public Key	Show the public key generated by the private key.
IP Address	Set the local virtual IP address and netmask. Example: 10.8.0.2/24
Listening Port	Set the port to send or receive WireGuard packets. The port numbers of different WireGuard interfaces should be different.
DNS	Set the DNS server address of this WireGuard interface. If left blank, the router will use DNS server address of common network interfaces (WAN, cellular, etc.).
MTU	Set the maximum transmission unit of this WireGuard interface. If left blank, the router will use MTU of common network interfaces (WAN, cellular, etc.).
Peer Table	Click "+" to add WireGuard peers of this WireGuard interface. One WireGuard interface can add 20 peers at most.

Table 3-4-6-13 WireGuard Parameters

Edit

Peer

Public Key

Allowed IP ✕

+

Route Allowed IP

Preshared Key ✎

Endpoint Address

Endpoint Port

Keepalive Interval

Save

Figure 3-4-6-19

WireGuard-Peer	
Item	Description
Peer	Set a WireGuard peer name. This name should be unique in this

	WireGuard client.
Public Key	Set the public key of WireGuard peer server/client.
Allowed IP	Set the real IP address and netmask of WireGuard peer's LAN network. Example: 192.168.1.0/24 One WireGuard peer supports to add 8 allowed IP addresses.
Route Allowed IP	Enable or disable to add static routings of allowed IP addresses.
Preshared Key	Set the presahred key and both this interface and peer interface should set the same key value.
Endpoint Address	Set IP address or domain name of WireGuard peer server/client.
Endpoint Port	Set the destination port of WireGuard peer server/client.
Keepalive Interval	After the connection is established, this WireGuard interface will send heartbeat packet regularly to keep alive. 0 means disabled.

Table 3-4-6-13 WireGuard-Peer Parameters

3.4.7 HTTP Proxy

The gateway can connect to an HTTP proxy server to communicate with target Internet sites while hiding the real IP addresses for security purposes.

Figure 3-4-7-1

HTTP Proxy	
Item	Description
Enable	Enable or disable HTTP proxy feature.
Proxy Sever Address	Set the proxy server address (IP/domain name) to send the request.
Port	Set the proxy server port to send the request.
Detection Cycle	Set the retry interval when failing to connect to the HTTP proxy server.
Proxy Exception	Select the traffic mode if failing to connect to the proxy server: Direct Connection: Send traffic to target without proxy. Traffic Interception: Intercept traffic until the connection with proxy server is restored.
Status	Display the connection status between the gateway and the proxy server.

Table 3-4-7-1 HTTP Proxy Parameters

3.5 System

This section describes how to configure general settings, such as administration account, access service, system time, common user management, SNMP, event alarms, etc.

3.5.1 General Settings

3.5.1.1 General

General settings include system info, access service and HTTPS certificates.

The screenshot shows the configuration interface for a Milesight gateway. It is divided into three main sections:

- System:** Contains two input fields: 'Hostname' with the value 'GATEWAY' and 'Web Login Timeout(s)' with the value '1800'.
- Access Service:** A table with columns 'Local', 'Remote', 'Service', and 'Port'. All 'Local' and 'Remote' checkboxes are checked. The services and their ports are: HTTP (80), HTTPS (443), TELNET (23), and SSH (22).
- HTTPS Certificates:** Contains two rows for 'Certificate' and 'Key'. The 'Certificate' field has the value 'https.crt' and the 'Key' field has 'https.key'. Each row has four buttons: 'Browse', 'Import', 'Export', and 'Delete'.

Figure 3-5-1-1

General	
Item	Description
System	
Hostname	User-defined gateway name. Must start with a letter.
Web Login Timeout (s)	You will be required to log in again upon timeout. Range: 100-3600 s.
Access Service	
Local	Enable or disable the service to access the device locally.
Remote	Enable or disable the service to access the device remotely.
Service	The device supports web access via HTTP/HTTPS or CLI access via SSH/TELNET.
Port	Set port number of the services. Each service must use a unique port. Range: 1-65535.
HTTPS Certificates	
Certificate	The gateway has preloaded certificate and key files for HTTPS access.

Key	<p>Browse: choose key file on the PC.</p> <p>Import: upload the file into gateway.</p> <p>Export: export file to the PC.</p> <p>Delete: delete the file.</p>
-----	--

Table 3-5-1-1 General Setting Parameters

3.5.1.2 System Time

This section explains how to set the system time including time zone and time synchronization type.

Note: to ensure that the gateway runs with the correct time, it's recommended that you set the system time when configuring the gateway.

The screenshot shows the 'System Time Settings' interface. It includes the following fields:

- Current Time:** 2019-06-12 20:34:32 Wed
- Time Zone:** 8 China (Beijing) (dropdown menu)
- Sync Type:** Sync with Browser (dropdown menu)
- Browser Time:** 2019-06-12 20:34:32 Wed

Figure 3-5-1-2

System Time	
Item	Description
Current Time	Show the current system time.
Time Zone	Click the drop down list to select the time zone you are in.
Sync Type	Click the drop down list to select the time synchronization type. Sync with Browser: Synchronize time with browser. Sync with NTP Server: Synchronize time with NTP Server. Set up Manually: configure the time manually.
Sync with NTP Server	
NTP Server Address	Set NTP server address (domain name/IP).
Enable NTP Server	After checked, NTP client on the network can achieve time synchronization with gateway.

Table 3-5-1-2 System Time Parameters

3.5.1.3 SMTP

SMTP, short for Simple Mail Transfer Protocol, is a TCP/IP protocol used in sending and receiving e-mail. This section describes how to configure email settings.

SMTP Client Settings

Enable

Email Address

Username

Password

SMTP Server Address

Port

Enable TLS

Save **Test**

Figure 3-5-1-3

SMTP	
Item	Description
SMTP Client Settings	
Enable	Enable or disable SMTP client function.
Email Address	Enter the sender's email address.
Username	Enter the sender's email username.
Password	Enter the sender's email password.
SMTP Server Address	Enter SMTP server's domain name.
Port	Enter SMTP server port. Range: 1-65535.
Enable TLS	Enable or disable TLS encryption.

Table 3-5-1-3 SMTP Setting

Related Topics

[Events Setting](#)

3.5.1.4 Phone

Phone settings involve in call/SMS trigger and SMS alarm for events. This is only applied to parts of gateway models with cellular feature.

Phone Number List

Name	Number	Operation
<input type="text" value="List1"/>	<input type="text" value="654321;123456"/>	<input checked="" type="checkbox"/> <input type="checkbox"/>

Save

Figure 3-5-1-4

Phone	
Item	Description
Phone Number List	
Name	Set phone group name.
Number	Enter the telephone number. Digits, "+" and "-" are allowed. You can divide multiple numbers by ",".

Table 3-5-1-4 Phone Settings

Related Topic

[Connect on Demand](#)

3.5.1.5 Email

Email settings involve email alarm for events.

Email List

Name	Email Address	Operation
list1	sam@user.com;hot@gmail.com	X
		+

Save

Figure 3-5-1-5

Email	
Item	Description
Email List	
Name	Set Email group name.
Email Address	Enter the Email address. You can divide multiple Email addresses by ",".

Table 3-5-1-5 Email Settings

3.5.2 User Management

3.5.2.1 Account

Here you can change the login username and password of the administrator.

Note: it is strongly recommended that you modify them for the sake of security.

Change Account Info

Username

Old Password

New Password

Confirm New Password

Save

Figure 3-5-2-1

Account	
Item	Description
Username	Enter a new username. You can use characters such as a-z, 0-9, "_", "-". The first character can't be a digit.
Old Password	Enter the old password.
New Password	Enter a new password to include any ASCII characters except spaces. The password must contain at least one letter and one number, with a length of 5-31 characters.
Confirm New Password	Enter the new password again.

Table 3-5-2-1 Account Information

3.5.2.2 User Management

This section describes how to create common user accounts.

The common user permission includes Read-Only and Read-Write.

User List

Username	Password	Permission	Operation
<input type="text" value="steve"/>	<input type="password" value="*****"/>	Read-Write	<input type="button" value="X"/>
<input type="text" value="test"/>	<input type="password" value="*****"/>	Read-Only	<input type="button" value="X"/>

Figure 3-5-2-2

User Management	
Item	Description
Username	Enter a new username. You can use characters such as a-z, 0-9, "_", "-". The first character can't be a digit.
Password	Set the password to include any ASCII characters except spaces. The password must contain at least one letter and one number, with a length of 5-31 characters.
Permission	Select user permission from "Read-Only" and "Read-Write". - Read-Only: users can only view the configuration of gateway in this

	<p>level.</p> <ul style="list-style-type: none"> - Read-Write: users can view and set the configuration of gateway in this level.
--	--

Table 3-5-2-2 User Management

3.5.2.3 HTTP API Management

This section describes how to configure the HTTP API account information.

Figure 3-5-2-3

HTTP API Management	
Item	Description
Type	Select the HTTP API account information the same as web GUI account or use an independent account.
Username	Enter a new username that is different from any other account info. You can use characters such as a-z, 0-9, "_", "-". The first character can't be a digit.
Password	Set the password to include any ASCII characters except spaces. The password must contain at least one letter and one number, with a length of 5-31 characters.
Advanced	
Password	Enter the current password and click Transform to display the encrypted password for HTTP API login credentials.

Table 3-5-2-3 HTTP API Management

3.5.3 SNMP

SNMP is widely used in network management for network monitoring. SNMP exposes management data with variables form in managed system. The system is organized in a management information base (MIB) which describes the system status and configuration. These variables can be remotely queried by managing applications.

Configuring SNMP in networking, NMS, and a management program of SNMP should be set up at the Manager.

Configuration steps are listed as below for achieving query from NMS:

1. Enable SNMP setting.
2. Download MIB file and load it into NMS.

3. Configure MIB View.
4. Configure VCAM.

3.5.3.1 SNMP

UG65 supports SNMPv1, SNMPv2c and SNMPv3 version. SNMPv1 and SNMPv2c employ community name authentication. SNMPv3 employs authentication encryption by username and password.

Figure 3-5-3-1

SNMP Settings	
Item	Description
Enable	Enable or disable SNMP function.
Port	Set SNMP listened port. Range: 1-65535. The default port is 161.
System Name	Fill in the system name to represent the gateway.
SNMP Version	Select SNMP version; support SNMP v1/v2c/v3.
Location Information	Fill in the location information.
Contact Information	Fill in the contact information.

Table 3-5-3-1 SNMP Parameters

3.5.3.2 MIB View

This section explains how to configure MIB view for the objects.

View List

View Name	View Filter	View OID	Operation
All	Included	1	<input type="checkbox"/>
system	Included	1.3.6.1.2.1.1	<input type="checkbox"/>
			<input type="checkbox"/>

Figure 3-5-3-2

MIB View	
Item	Description
View Name	Set MIB view's name.
View Filter	Select from "Included" and "Excluded".
View OID	Enter the OID number.
Included	You can query all nodes within the specified MIB node.
Excluded	You can query all nodes except for the specified MIB node.

Table 3-5-3-2 MIB View Parameters

3.5.3.3 VACM

This section describes how to configure VACM parameters.

SNMP v1 & v2 User List

Community	Permission	MIB View	Network	Operation
private	Read-write	All	0.0.0.0/0	<input type="checkbox"/>
public	Read-only	none	0.0.0.0/0	<input type="checkbox"/>
				<input type="checkbox"/>

Figure 3-5-3-3

VACM	
Item	Description
SNMP v1 & v2 User List	
Community	Set the community name.
Permission	Select from "Read-Only" and "Read-Write".
MIB View	Select an MIB view to set permissions from the MIB view list.
Network	The IP address and bits of the external network accessing the MIB view.
Read-Write	The permission of the specified MIB node is read and write.
Read-Only	The permission of the specified MIB node is read only.
SNMP v3 User List	
Group Name	Set the name of SNMPv3 group.
Security Level	Select from "NoAuth/NoPriv", "Auth/NoPriv", and "Auth/Priv".

Read-Only View	Select an MIB view to set permission as "Read-only" from the MIB view list.
Read-Write View	Select an MIB view to set permission as "Read-write" from the MIB view list.
Inform View	Select an MIB view to set permission as "Inform" from the MIB view list.

Table 3-5-3-3 VACM Parameters

3.5.3.4 Trap

This section explains how to enable network monitoring by SNMP trap.

Figure 3-5-3-4

SNMP Trap	
Item	Description
Enable	Enable or disable SNMP Trap function.
SNMP Version	Select SNMP version; support SNMP v1/v2c/v3.
Server Address	Fill in NMS's IP address or domain name.
Port	Fill in UDP port. Port range is 1-65535. The default port is 162.
Name	Fill in the group name when using SNMP v1/v2c; fill in the username when using SNMP v3.
Auth/Priv Mode	Select from "NoAuth & No Priv", "Auth & NoPriv", and "Auth & Priv".

Table 3-5-3-4 Trap Parameters

3.5.3.5 MIB

This section describes how to download MIB files.

Figure 3-5-3-5

MIB	
Item	Description
MIB File	Select the MIB file you need.

Download	Click "Download" button to download the MIB file to PC.
----------	---

Table 3-5-3-5 MIB Download

3.5.4 Device Management

3.5.4.1 Auto Provision

Users can customize and select the configuration profile from Milesight Development Platform. When Auto Provision is enabled and the device is connected to Internet, the device will receive the profile to achieve initial configuration. This feature will work even the device does not configure to connect Milesight Development Platform.

Auto Provision

Enable

Status Connection Failed

[Save & Apply](#)

3.5.4.2 Management Platform

You can connect the device to the DeviceHub or Milesight Development Platform on this page so as to manage the gateway centrally and remotely.

Management Platform

Enable

Platform Type

Activation Server Address

Device Management Server Address

Activation Method

ID

Password

Status Disconnected

[Save & Apply](#)

Figure 3-5-4-1

Item	Description
Enable	Enable or disable to connect gateway to management platform.
Platform Type	Milesight DeviceHub 1.0, Milesight DeviceHub 2.0 or Milesight Development Platform is optional.
Status	Show the connection status between the gateway and the management platform.
DeviceHub 1.0	
Activation Server Address	IP address or domain of the DeviceHub.
DeviceHub Management Address	The URL address for the device to connect to the DeviceHub, e.g. http://220.82.63.79:8080/acs.
Activation Method	Select activation method to connect the gateway to the DeviceHub server, options are "By Authentication ID" and "By ID".
Authentication Code	Fill in the authentication code generated from the DeviceHub.
ID	Fill in the registered DeviceHub account (email) and password.
Password	
DeviceHub 2.0	
Server Address	IP address or domain of the DeviceHub.

Table 3-5-4-1

3.5.5 Events

Event feature is capable of sending alerts by Email when certain system events occur.

3.5.5.1 Events

You can view alarm messages on this page.

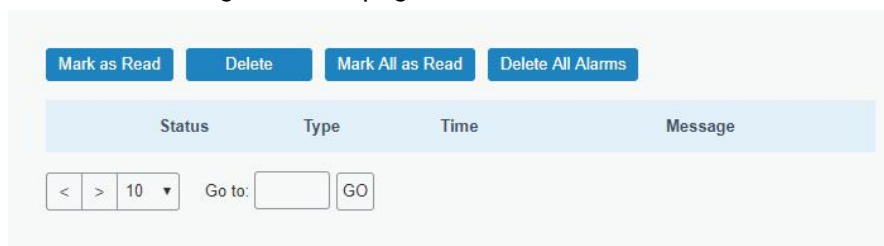


Figure 3-5-5-1

Events	
Item	Description
Mark as Read	Mark the selected event alarm as read.
Delete	Delete the selected event alarm.
Mark All as Read	Mark all event alarms as read.
Delete All Alarms	Delete all event alarms.
Status	Show the reading status of the event alarms.
Type	Show the event type that should be alarmed.
Time	Show the alarm time.
Message	Show the alarm content.

Table 3-5-5-1 Events Parameters

3.5.5.2 Events Settings

In this section, you can decide what events to record and whether you want to receive email and SMS notifications when any change occurs.

Events Settings

Enable

Phone for Notification

Email for Notification

Events	Record	Email Email Setting	SMS SMS Setting
Cellular Up	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Cellular Down	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
WAN Up	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
WAN Down	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
VPN Up	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
VPN Down	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Power On	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Power Off	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Connect to UPS External Power Supplies	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Connect to UPS Internal Battery	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
UPS Low Power (20%)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
UPS Abnormal Charging	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Disconnect the UPS	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Docker Exception	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Http Proxy Down	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Http Proxy Up	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Figure 3-5-5-2

Event Settings	
Item	Description
Enable	Check to enable "Events Settings".
Phone for Notification	Select phone group to receive SMS alarm.
Email for Notification	Select Email group to receive Email alarm.
Events	Event type the gateway supports to record.

Record	The relevant content of event alarm will be recorded on "Event" page if this option is checked.
Email	The relevant content of event alarm will be sent out via email if this option is checked.
Email Setting	Click and you will be redirected to the page "Email" to configure the Email group.
SMS	The relevant content of event alarm will be sent out via SMS if this option is checked.
SMS Setting	Click and you will be redirected to the page of "Phone" to configure phone group list.
Phone Group List	Select phone group to receive SMS alarm.
Email Group List	Select Email group to receive Email alarm.

Table 3-5-5-2 Events Parameters

Related Topics

[Email Setting](#)

[Phone Setting](#)

3.6 Maintenance

This section describes system maintenance tools and management.

3.6.1 Tools

Troubleshooting tools includes ping and traceroute.

3.6.1.1 Ping

Ping tool is engineered to ping outer network.



Figure 3-6-1-1

PING	
Item	Description
Host	Ping outer network from the gateway.

Table 3-6-1-1 IP Ping Parameters

3.6.1.2 Traceroute

Traceroute tool is used for troubleshooting network routing failures.

Figure 3-6-1-2

Traceroute	
Item	Description
Host	Address of the destination host to be detected.

Table 3-6-1-2 Traceroute Parameters

3.6.1.3 Packet Analyzer

Packet Analyzer is used for capturing the packet of different interfaces.

Figure 3-6-1-3

Packet Analyzer	
Item	Description
Ethernet Interface	Select the interface to capture packages.
IP Address	Set the IP address that the router will capture.
Port	Set the port that the router will capture.
Advanced	Set the rules for sniffer. The format is tcpdump.

Table 3-6-1-3 Packet Analyzer Parameters

3.6.1.4 Qxdmlog

This section allow collecting diagnostic logs of cellular module via QXDM tool.

Figure 3-6-1-4

3.6.2 Schedule

This section explains how to configure scheduled reboot on the gateway.

Schedule	Frequency	Hour	Minute	Operation
<input type="text"/>	Every Month	1	0	<input type="button" value="x"/> <input type="button" value="+"/>

Figure 3-6-2-1

Schedule	
Item	Description
Schedule	Select schedule event: Reboot: Reboot the gateway regularly.
Frequency	Select the frequency to execute the schedule.

Table 3-6-2-1 Schedule Parameters

3.6.3 Log

The system log contains a record of informational, error and warning events that indicates how the system processes. By reviewing the data contained in the log, an administrator or user troubleshooting the system can identify the cause of a problem or whether the system processes are loading successfully. Remote log server is feasible, and gateway will upload all system logs to remote log server such as Syslog Watcher.

3.6.3.1 System Log

This section describes how to download log file and view the recent log on web.

System Log Log Settings

Download

File:

Log

View recent(lines):

```
Thu Jul 18 15:01:25 2019 user.notice redis[1859]: Background saving terminated with success
Thu Jul 18 15:06:26 2019 user.notice redis[1859]: 10 changes in 300 seconds. Saving...
Thu Jul 18 15:06:26 2019 user.notice redis[1859]: Background saving started by pid 11683
Thu Jul 18 15:06:26 2019 user.notice redis[11683]: DB saved on disk
Thu Jul 18 15:06:26 2019 user.notice redis[1859]: Background saving terminated with success
Thu Jul 18 15:11:27 2019 user.notice redis[1859]: 10 changes in 300 seconds. Saving...
Thu Jul 18 15:11:27 2019 user.notice redis[1859]: Background saving started by pid 15776
Thu Jul 18 15:11:27 2019 user.notice redis[15776]: DB saved on disk
Thu Jul 18 15:11:27 2019 user.notice redis[1859]: Background saving terminated with success
Thu Jul 18 15:16:28 2019 user.notice redis[1859]: 10 changes in 300 seconds. Saving...
Thu Jul 18 15:16:28 2019 user.notice redis[1859]: Background saving started by pid 19899
Thu Jul 18 15:16:28 2019 user.notice redis[19899]: DB saved on disk
Thu Jul 18 15:16:28 2019 user.notice redis[1859]: Background saving terminated with success
```

Figure 3-6-3-1

Item	Description
Download	Download log file.
View recent (lines)	View the specified lines of system log.
Clear Log	Clear the current system log.

Table 3-6-3-1 System Log Parameters

3.6.3.2 Log Settings

This section explains how to enable remote log server and local log setting.

Figure 3-6-3-2

Log Settings	
Item	Description
Remote Log Server	
Enable	With “Remote Log Server” enabled, gateway will send all system logs to the remote server.
Syslog Server Address	Fill in the remote system log server address (IP/domain name).
Port	Fill in the remote system log server port.
Local Log File	
Storage	User can store the log file in memory.
Size	Set the size of the log file to be stored.
Log Severity	The list of severities follows the syslog protocol.

Table 3-6-3-2 System Log Parameters

3.6.4 Upgrade

This section describes how to upgrade the gateway firmware via web. Generally you don't need to do the firmware upgrade.

Note: any operation on web page is not allowed during firmware upgrade, otherwise the upgrade will be interrupted, or even the device will break down.

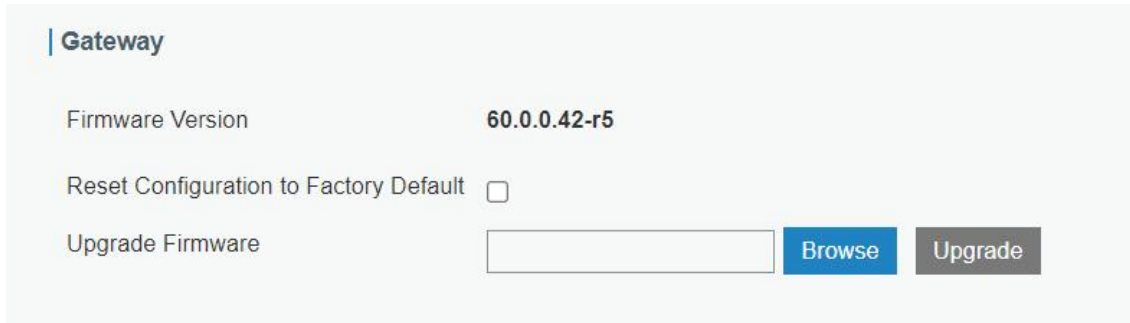


Figure 3-6-4-1

Upgrade	
Item	Description
Firmware Version	Show the current firmware version.
Reset Configuration to Factory Default	When this option is checked, the gateway will be reset to factory defaults after upgrade.
Upgrade Firmware	Click "Browse" button to select the new firmware file, and click "Upgrade" to upgrade firmware.

Table 3-6-4-1 Upgrade Parameters

Related Configuration Example

[Firmware Upgrade](#)

3.6.5 Backup and Restore

This section explains how to create a backup of the whole system configurations to a file, replicate parts of important configuration only for batch backup, restore the config file to the gateway and reset to factory defaults.

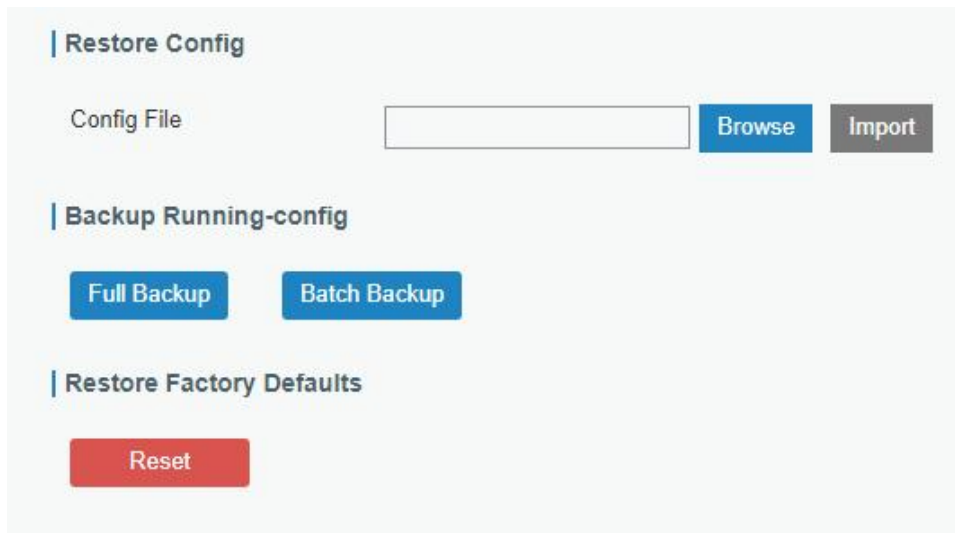


Figure 3-6-5-1

Backup and Restore	
Item	Description
Config File	Click "Browse" button to select configuration file, and then click "Import"

	button to upload the configuration file to the gateway.
Full Backup	Click "Full Backup" to export the current configuration file to the PC.
Batch Backup	Click "Batch Backup" to export current configuration except gateway ID of packet forwarder, all embedded NS settings, static IP address of WAN, WLAN settings, user management settings, DeviceHub authentication code, all APP settings.
Reset	Click "Reset" button to reset factory default settings. gateway will restart after reset process is done.

Table 3-6-5-1 Backup and Restore Parameters

Related Configuration Example

[Restore Factory Defaults](#)

3.6.6 Reboot

On this page you can reboot the gateway and return to the login page. We strongly recommend clicking "Save" button before rebooting the gateway so as to avoid losing the new configuration.

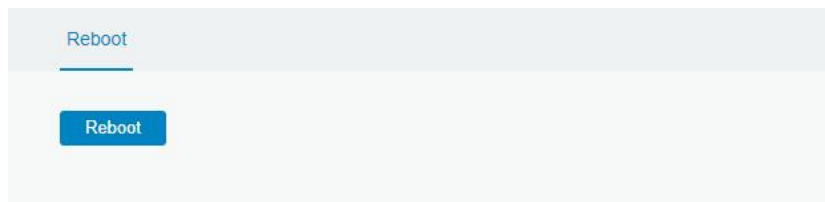


Figure 3-6-6-1

3.7 APP

3.7.1 Python

Python is an object-oriented programming language that has gained popularity because of its clear syntax and readability.

As an interpreted language, Python has a design philosophy that emphasizes code readability, notably using whitespace indentation to delimit code blocks rather than curly brackets or keywords, and a syntax that allows programmers to express concepts in fewer lines of code than it's used in other languages such as C++ or Java. The language provides constructs and intends to enable writing clear programs on both small and large scale.

Users can use Python to quickly generate the prototype of the program, which can be the final interface of the program, rewrite it with a more appropriate language, and then encapsulate the extended class library that Python can call.

This section describes how to view the relevant running status such as App-manager, SDK version, extended storage, etc. Also you can change the App-manager configuration, and import the Python App package from here.

3.7.1.1 Python

Python

AppManager Status Uninstalled

SDK Version

SDK Path

Available Storage local ▾

SDK Upload Browse Install

Figure 3-7-1-1

Python	
Item	Description
AppManager Status	Show AppManager's running status, like "Uninstalled", "Running" or "Stopped".
SDK Version	Show the version of the installed SDK.
SDK Path	Show the SDK installation path.
Available Storage	Select available storage to install SDK.
SDK Upload	Upload and install SDK for Python.
Uninstall	Uninstall SDK.
View	View application status managed by AppManager.

Table 3-7-1-1 Python Parameters

3.7.1.2 App Manager Configuration

AppManager

Enable

App Management

ID	App Command	Logfile Size(MB)	Uninstall

App Status

App Name	App Version	SDK Version

Figure 3-7-1-2

AppManager Configuration	
Item	Description
Enable	After enabling Python AppManager, user can click "View" button on the "Python" webpage to view the application status managed by AppManager.

App Management	
ID	Show the ID of the imported App.
App Command	Show the name of the imported App.
Logfile Size(MB)	User-defined Logfile size. Range: 1-50.
Uninstall	Uninstall APP.
App Status	
App Name	Show the name of the imported App.
App Version	Show the version of the imported App.
SDK Version	Show the SDK version which the imported App is based on.

Table 3-7-1-2 APP Manager Parameters

3.7.1.3 Python App

Figure 3-7-1-3

Python APP	
Item	Description
App Package	Select App package and import.
App Name	Select App to import configuration.
App Configuration	Select configuration file and import.
Debug File	Export script file.
Debug Script	Select Python script to be debugged and import.

Table 3-7-1-3 APP Parameters

3.7.2 Node-RED

Node-RED is a flow-based development tool for visual programming and wiring together

hardware devices, APIs and online services as part of the Internet of Things. Node-RED provides a web-browser-based flow editor, which can easily wire together flows using the wide range of nodes in the palette. For more guidance and documentation please refer to [Node-RED official website](#).

3.7.2.1 Node-RED

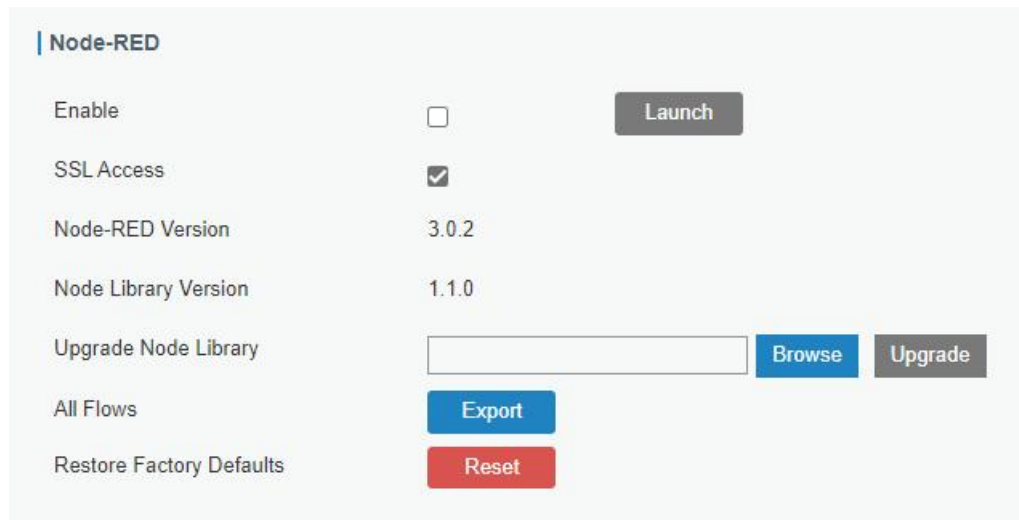


Figure 3-7-2-1

Node-RED	
Item	Description
Enable	Enable the Node-RED.
Launch	Click to launch the web GUI of Node-RED.
SSL Access	Enable to access the Node-RED web GUI via HTTPS service only.
Node-RED Version	Show the version of the Node-RED. The Node-RED version can be upgraded only when you upgrade the gateway.
Node Library Version	Show the version of the node library.
Upgrade Node Library	Upgrade the node library by importing the library package.
All Flows Export	Export all flows as a JSON format file.
Restore Factory Default	Erase all flow data of Node-RED.

Table 3-7-2-1 Node-RED Parameters

Milesight provides a customized node library to use the interfaces of the gateway.

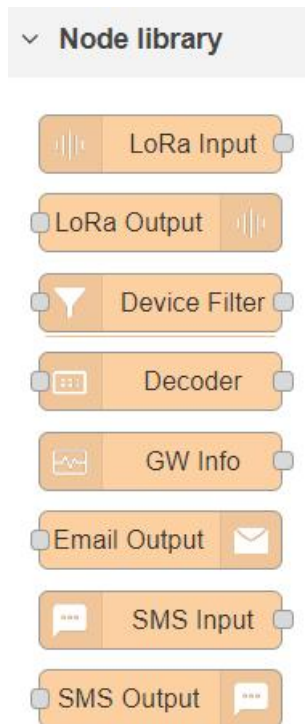


Figure 3-7-2-2

Node Library	
Node	Description
LoRa Input	Receive LoRaWAN® packets from the gateway. This only works when the network server is enabled.
LoRa Output	Send downlink commands to LoRaWAN® nodes.
Device Filter	Filter out the data of one or more specific LoRaWAN® nodes via device EUIs.
GW Info	Monitor events of gateway, this needs to ensure the event detection is enabled in General > Events > Events Settings .
Email Output	Send an Email. If you select STMP option as "Same as the gateway", it is necessary to go to System > General Settings > SMTP page to configure SMTP client settings.
SMS Input	Receive SMS message. This only works when the cellular is connected.
SMS Output	Send an SMS message. This only works when the cellular is connected.

Table 3-7-2-2 Node Library Parameters

Related Configuration Example


[Node-RED](#)

Chapter 4 Application Examples


4.1 Restore Factory Defaults

Method 1:

Log in web interface, and go to **Maintenance > Backup and Restore**, click **Reset** button, you will be asked to confirm if you'd like to reset it to factory defaults. Then click **Reset** button.

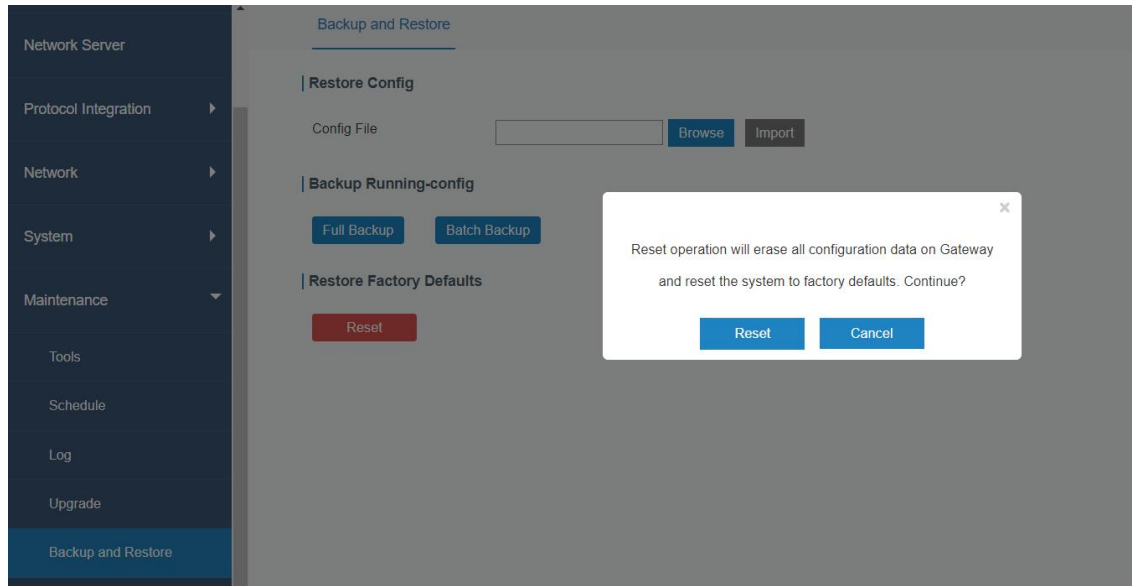

Then the gateway will reboot and restore to factory settings immediately.

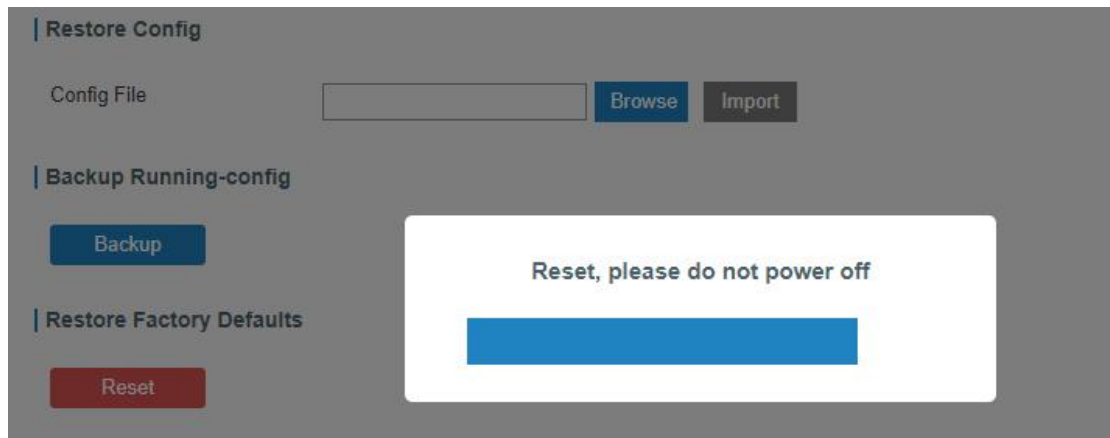

Please wait till STATUS light staticly and the login page pops up again, which means the gateway has already been reset to factory defaults successfully.

Related Topic

[Restore Factory Defaults](#)

Method 2:

Locate the reset button on the gateway, press and hold the reset button for more than 5s

until the STATUS LED blinks.


4.2 Firmware Upgrade

It is suggested that you contact Milesight technical support first before you upgrade gateway firmware. Gateway firmware file suffix is “.bin”.

After getting firmware file please refer to the following steps to complete the upgrade.

1. Go to “Maintenance > Upgrade”.
2. Click “Browse” and select the correct firmware file from the PC.
3. Click “Upgrade” and the gateway will check if the firmware file is correct. If it’s correct, the firmware will be imported to the gateway, and then the gateway will start to upgrade.
4. After upgrade, open the gateway web GUI via browser to check if upgrade success.

Before opening, it is suggested to clean the caches of browser.

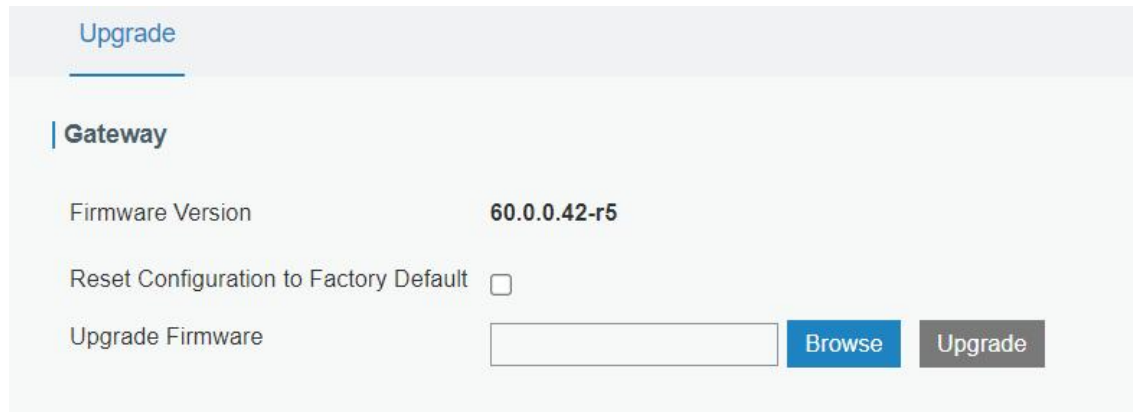


Upgrade

Gateway

Firmware Version 60.0.0.42-r5

Reset Configuration to Factory Default

Upgrade Firmware

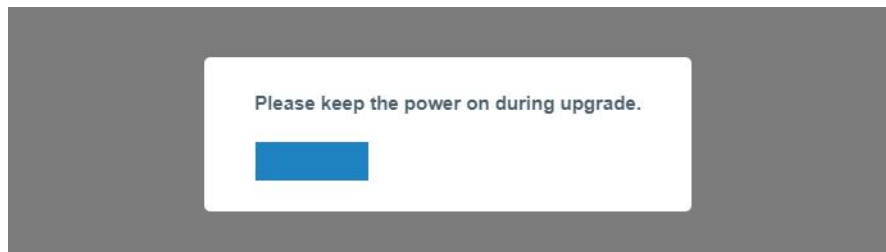

Related Topic

[Upgrade](#)

4.3 Network Connection

The gateway supports multiple methods to set up network connections.

4.3.1 Ethernet Connection


1. Go to “Network > Interface > Port” page to select the connection type and configure Ethernet port configuration, click “Save & Apply” for configuration to take effect.

Port	WLAN	Cellular	Loopback	VLAN Trunk
— Port_1				
Port	eth 0			
Connection Type	Static IP			
IP Address	192.168.44.186			
Netmask	255.255.255.0			
Gateway	192.168.44.1			
MTU	1500			
Primary DNS Server	8.8.8.8			
Secondary DNS Server	223.5.5.5			
Enable NAT	<input checked="" type="checkbox"/>			

Note: If there is IP conflict when changing the IP address of Ethernet port, please change the subnet of WLAN first.

Port	WLAN	Loopback	VLAN Trunk
WLAN			
Enable	<input checked="" type="checkbox"/>		
Work Mode	AP		
IP Setting			
Protocol	Static IP		
IP Address	192.168.10.1		
Netmask	255.255.255.0		

2. Connect Ethernet port of gateway to devices like router or modem.
3. Go to “Maintenance > Tools > Ping” to check network connectivity.

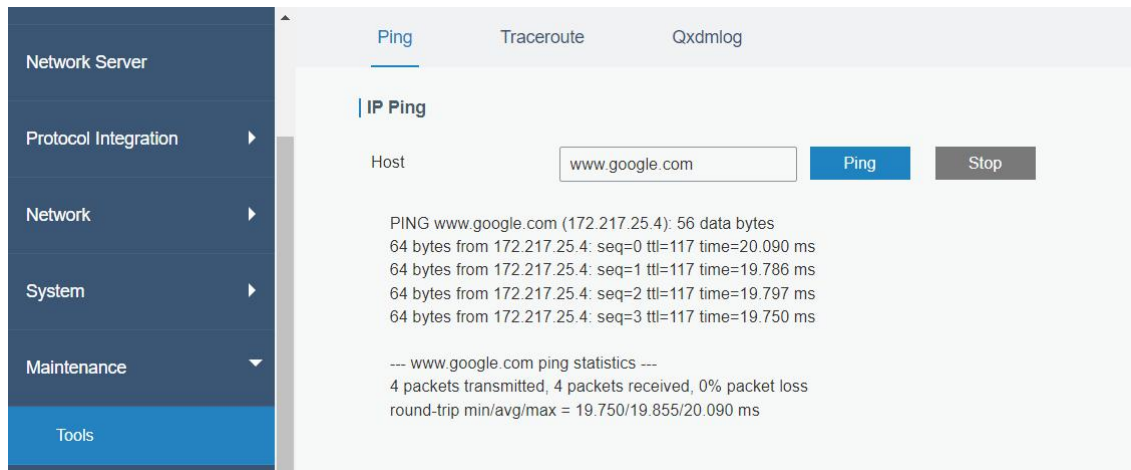

Related Topic

[Port Setting](#)

4.3.2 Cellular Connection (Cellular Version Only)

1. Go to “Network > Interface > Cellular > Cellular Setting” and configure the necessary cellular info of SIM card, click “Save” and “Apply” for configuration to take effect.

The screenshot shows the 'Cellular Setting' configuration page with the following fields and values:

Field	Value
Enable	<input checked="" type="checkbox"/>
Protocol Type	IPv4
Network Type	Auto
APN	
Username	
Password	
Access Number	
PIN Code	
Authentication Type	None

2. Go to “Status > Cellular” to view the status of the cellular connection. If it shows 'Connected', SIM has dialed up successfully.

Overview	Packet Forward	Cellular	Network	WLAN
Modem				
Status		Ready		
Model		EC25		
Version		EC25ECGAR06A07M1G		
Signal Level		23asu (-67dBm)		
Register Status		Registered (Home network)		
IMEI		860425047368939		
IMSI		460019425301842		
ICCID		89860117838009934120		
ISP		CHN-UNICOM		
Network Type		LTE		
PLMN ID				
LAC		5922		
Cell ID		340db83		
Network				
Status		Connected		
IP Address		10.132.132.59		
Netmask		255.255.255.240		
Gateway		10.132.132.60		

Related Topic

[Cellular Setting](#)

[Cellular Status](#)

4.4 Wi-Fi Application Example

4.4.1 AP Mode

Application Example

Configure UG65 as AP to allow connection from users or devices.

Configuration Steps

1. Go to "Network > Interface > WLAN" to configure wireless parameters as below.

Port	WLAN	Cellular	Loopback
 WLAN			
Enable	<input checked="" type="checkbox"/>		
Work Mode	AP		
SSID Broadcast	<input checked="" type="checkbox"/>		
AP Isolation	<input type="checkbox"/>		
Radio Type	802.11n(2.4GHz)		
Channel	Auto		
SSID	Gateway_F1200F		
BSSID	24:e1:24:f1:20:0f		
Encryption Mode	No Encryption		
Bandwidth	20MHz		
Max Client Number	10		

Click “Save” and “Apply” buttons after all configurations are done.

2. Use a smart phone to connect the access point of gateway. Go to “Status > WLAN”, and you can check the AP settings and information of the connected client/user.

Overview	Packet Forward	Cellular	Network	WLAN	VPN
 WLAN Status					
Wireless Status	Enabled				
MAC Address	24:e1:24:f1:20:0f				
Interface Type	AP				
SSID	Gateway_F1200F				
Channel	Auto				
Encryption Type	No Encryption				
Status	Up				
IP Address	192.168.1.1				
Netmask	255.255.255.0				
Connection Duration	0 days, 02:40:52				


4.4.2 Client Mode

Application Example


Configure UG65 as Wi-Fi client to connect to an access point to have Internet access.

Configuration Steps

1. Go to **Network > Interface > Port** page to select connection type as **Static IP** and configure an IP address for the Ethernet WAN port.

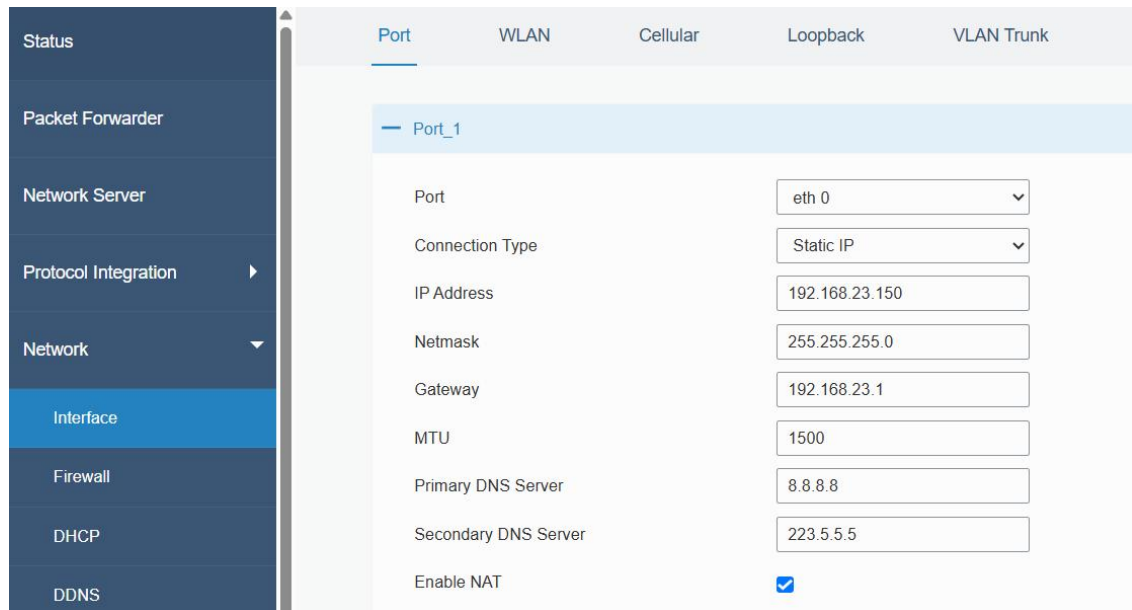

2. Connect PC to UG65 ETH port directly or through PoE injector.
3. Assign the IP address to computer manually. Take Windows 10 system as an example:

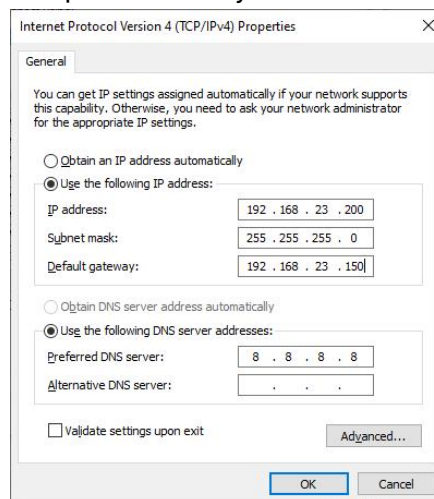

4. Open a Web browser and type in the IP address of the Ethernet port to access the web GUI.
5. Go to **Network > Interface > WLAN** and click **Scan** to search for WiFi access point.

Port	WLAN	Cellular	Loopback				
< GoBack							
SSID	Channel	Signal	Cipher	BSSID	Security	Frequency	
AAA	Auto	-61dBm	AES	24:e1:24:f0:c4:13	WPA-PSK/WPA2-PSK	2412MHz	Join Network

6. Select one access point and click **Join Network**, then type the password of the access point.


Port	WLAN	Cellular	Loopback
WLAN			
Enable	<input checked="" type="checkbox"/>		
Work Mode	Client		Scan
SSID	AAA		
BSSID	24:e1:24:f0:c4:13		
Encryption Mode	WPA-PSK/WPA2-PSK		
Cipher	AES		
Key	*****		
IP Setting			
Protocol	DHCP Client		

Click **Save** and **Apply** buttons after all configurations are done.

7. Go to **Status > WLAN** to check the connection status of the client.

WLAN Status	
Wireless Status	Enabled
MAC Address	24:e1:24:f0:de:14
Interface Type	Client
SSID	AAA
Channel	Auto
Encryption Type	WPA-PSK/WPA2-PSK
Cipher	AES
Status	Connected
IP Address	192.168.1.145
Netmask	255.255.255.0
Connection Duration	0 days, 02:44:45

8. Go to **Network > Failover > WAN Failover** to switch the wlan0 as main interface, then gateway can use the Wi-Fi to access the network.

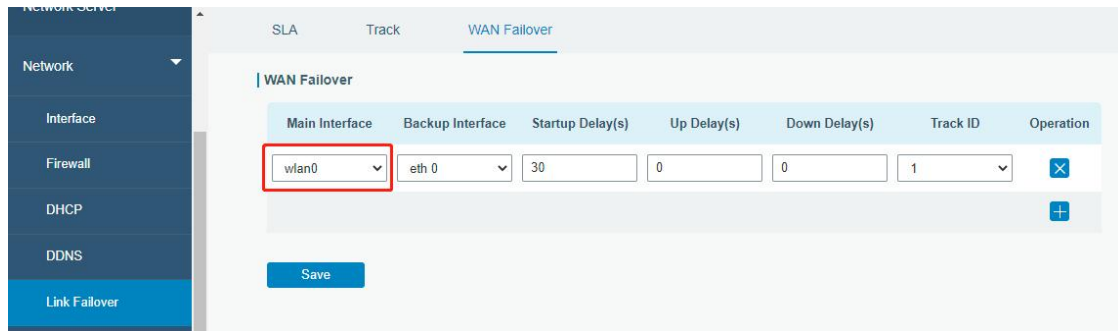

Related Topic


[WLAN Setting](#)


[WLAN Status](#)

4.5 Packet Forwarder Configuration

UG65 gateway has installed multiple packet forwarders including Semtech, Basic station, Chirpstack, etc. Before connecting make sure the gateway has connected to network.

1. Go to **Packet Forwarder > General**.

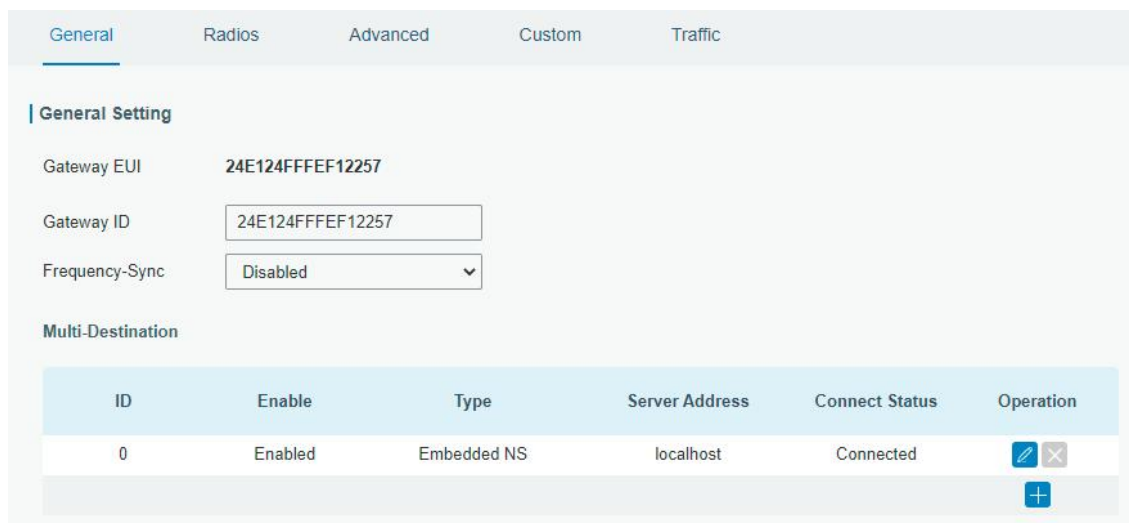

2. Click  to add a new network server. Fill in the network server information and enable this server.

Enable	<input checked="" type="checkbox"/>
Type	Semtech
Server Address	eu1.cloud.thethings.network
Port Up	1700
Port Down	1700

[Save](#)

3. Go to **Packet Forwarder > Radio** page to configure the center frequency and channels. The channels of the gateway and network server need to be the same.

Region: US915

Name	Center Frequency/MHz
Radio 0	904.3
Radio 1	905.0

Multi Channels Setting

Enable	Index	Radio	Frequency/MHz
<input checked="" type="checkbox"/>	0	Radio 0	903.9
<input checked="" type="checkbox"/>	1	Radio 0	904.1
<input checked="" type="checkbox"/>	2	Radio 0	904.3
<input checked="" type="checkbox"/>	3	Radio 0	904.5
<input checked="" type="checkbox"/>	4	Radio 1	904.7
<input checked="" type="checkbox"/>	5	Radio 1	904.9
<input checked="" type="checkbox"/>	6	Radio 1	905.1
<input checked="" type="checkbox"/>	7	Radio 1	905.3

4. Add the gateway on network server page. For more details about the network server connection please refer to [Milesight IoT Support portal](#).

4.6 Network Server Configuration

The gateway can work as a LoRaWAN® network server to receive and analyze the data of LoRaWAN® end devices, and then achieve the flexible integration with different systems.

4.6.1 Connect to Milesight IoT Cloud

1. Go to **Packet Forwarder > General** page to enable the embedded network server.

The screenshot shows the 'Packet Forwarder' configuration page. The 'General Setting' section includes:

- Gateway EUI: 24E124FFFEF12257
- Gateway ID: 24E124FFFEF12257
- Frequency-Sync: Disabled

The 'Multi-Destination' section contains a table with the following data:

ID	Enable	Type	Server Address	Connect Status	Operation
0	Enabled	Embedded NS	localhost	Connected	[Edit] [Close] [Add]

2. Go to **Packet Forwarder > Radio** page to select the antenna type, configure the center frequency and channels. The channels of the gateway and end devices need to be the same.


The screenshot shows the 'Radio' configuration page. The 'Region' is set to 'US915'. The 'Center Frequency/MHz' table is as follows:

Name	Center Frequency/MHz
Radio 0	904.3
Radio 1	905.0


The 'Multi Channels Setting' section contains a table with the following data:

Enable	Index	Radio	Frequency/MHz
<input checked="" type="checkbox"/>	0	Radio 0	903.9
<input checked="" type="checkbox"/>	1	Radio 0	904.1
<input checked="" type="checkbox"/>	2	Radio 0	904.3
<input checked="" type="checkbox"/>	3	Radio 0	904.5
<input checked="" type="checkbox"/>	4	Radio 1	904.7
<input checked="" type="checkbox"/>	5	Radio 1	904.9
<input checked="" type="checkbox"/>	6	Radio 1	905.1
<input checked="" type="checkbox"/>	7	Radio 1	905.3


3. Go to **Network Server > General** page to enable the network server and "Cloud mode", then select "Milesight IoT Cloud" mode.

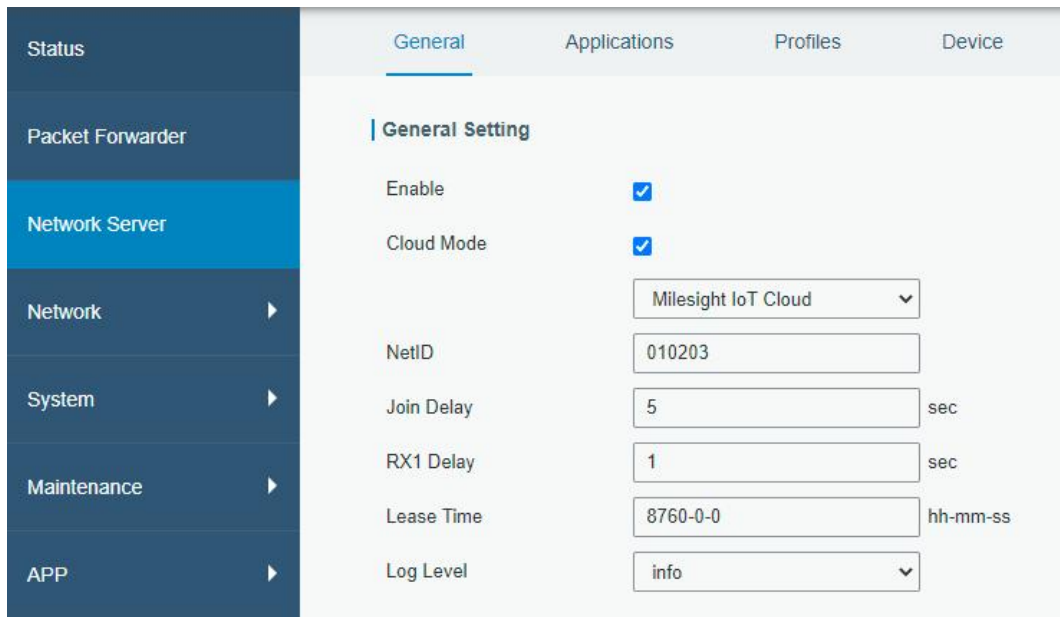

4. Log in the Milesight IoT Cloud. Then go to **My Devices** page and click “+New Devices” to add gateway to Milesight IoT Cloud via SN. Gateway will be added under “Gateways” menu.

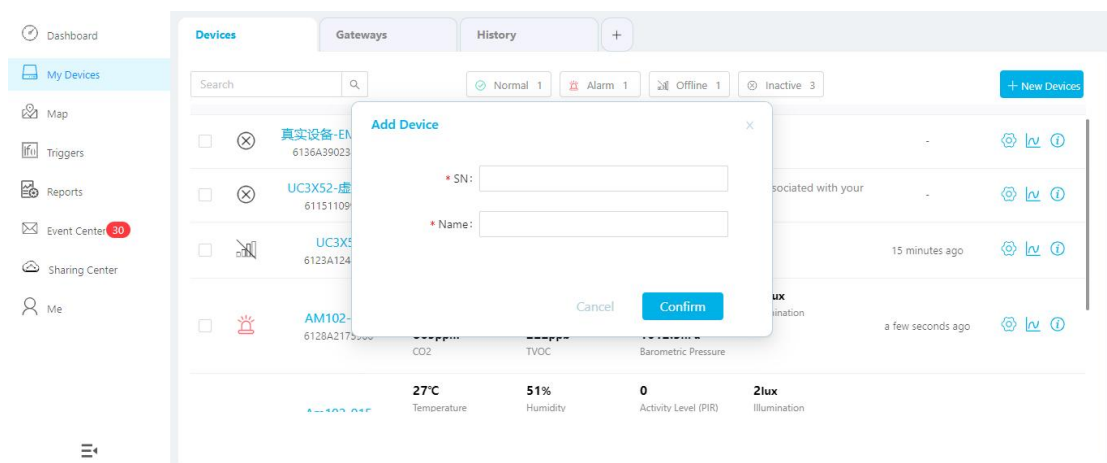

5. The gateway is online on Milesight IoT Cloud.

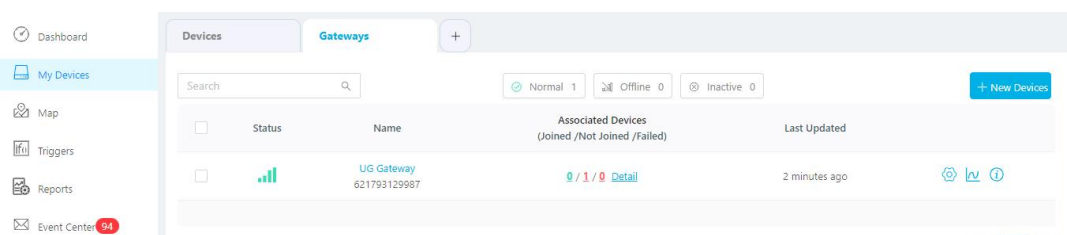

4.6.2 Add End Devices

1. Go to **Packet Forwarder > General** page to enable the embedded NS.

General Radios Advanced Custom Traffic

Packet Forwarder

Network Server

Network

System

Maintenance

APP

General Setting

Gateway EUI 24E124FFFEF12257

Gateway ID 24E124FFFEF12257

Frequency-Sync Disabled

Multi-Destination

ID	Enable	Type	Server Address	Connect Status	Operation
0	Enabled	Embedded NS	localhost	Connected	

2. Go to **Packet Forwarder > Radio** page to configure the center frequency and channels. The channels of the gateway and end devices need to be the same.

Region US915

Name	Center Frequency/MHz
Radio 0	904.3
Radio 1	905.0

Multi Channels Setting

Enable	Index	Radio	Frequency/MHz
<input checked="" type="checkbox"/>	0	Radio 0	903.9
<input checked="" type="checkbox"/>	1	Radio 0	904.1
<input checked="" type="checkbox"/>	2	Radio 0	904.3
<input checked="" type="checkbox"/>	3	Radio 0	904.5
<input checked="" type="checkbox"/>	4	Radio 1	904.7
<input checked="" type="checkbox"/>	5	Radio 1	904.9
<input checked="" type="checkbox"/>	6	Radio 1	905.1
<input checked="" type="checkbox"/>	7	Radio 1	905.3

3. Go to **Network Server > General** page to enable the network server.

General Applications Payload Codec Profiles

Packet Forwarder

Network Server




General Setting

Enable

Platform Mode

4. Go to **Network Server > Applications** page to add an application.

Applications

ID	Name	Description	Operation
1	Test	Test	 
			


Applications

Name

Description

Metadata

Data Transmission

Type	Operation
	

5. Go to **Network Server > Device** page and click **Add** to add a LoRaWAN® node device. You can also click **Bulk Import** to use template to add bulk devices at once.

Device

Device Name	Device EUI	Device-Profile	Application	Last Seen	Activated	Operation
No matching records found						

6. Fill in the information of the end device and click **Save&Apply**. The information can be found on the end device's configuration page or from manufacturer's manuals. Here are the default settings of Milesight end devices:

- Device EUI: this can be found on the device.
- Device-Profile: OTAA type files
- Payload Codec: select the model
- fPort: 85
- Application Key: select Default Value. If you use random keys, please select Custom Value.
- Timeout: the time to judge the device online/offline status.

Device Name	<input type="text" value="lora-sensor"/>
Description	<input type="text" value="a short description of your node"/>
Device EUI	<input type="text" value="0000000000000000"/>
Device-Profile	<input type="text" value="ClassA-OTAA"/>
Application	<input type="text" value="cloud"/>
Payload Codec	<input type="text"/>
fPort	<input type="text" value="1"/>
Frame-counter Validation	<input type="checkbox"/>
Application Key	<input checked="" type="radio"/> Default Value <input type="radio"/> Custom Value
Device Address	<input type="text"/>
Network Session Key	<input type="text"/>
Application Session Key	<input type="text"/>
Uplink Frame-counter	<input type="text" value="0"/>
Downlink Frame-counter	<input type="text" value="0"/>
Timeout	<input type="text" value="1440"/> min

7. Go to **Network Server > Packets** page to check if any uplinks from this device.

Network Server

Clear

Device EUI/Group	Gateway ID	Frequency	Datarate	RSSI/SNR	Size	Fcnt	Type	Time	Details
24E12 [redacted]	24E124 [redacted]	868300000	SF7BW125	-44/14.5	23	678	UpUnc	2025-04-03 10:09:25+08:00	!
24E12 [redacted]	24E124 [redacted]	868500000	SF7BW125	-44/10.2	23	677	UpUnc	2025-04-03 10:08:25+08:00	!
24E12 [redacted]	24E124 [redacted]	868100000	SF7BW125	-53/14.0	10	289	UpUnc	2025-04-03 10:07:46+08:00	!
24E12 [redacted]	24E124 [redacted]	868100000	SF7BW125	-39/14.2	23	676	UpUnc	2025-04-03 10:07:25+08:00	!
24E12 [redacted]	24E124 [redacted]	868100000	SF7BW125	-40/13.8	23	675	UpUnc	2025-04-03 10:06:25+08:00	!
24E12 [redacted]	24E124 [redacted]	868100000	SF7BW125	-40/14.0	23	674	UpUnc	2025-04-03 10:05:25+08:00	!
24E12 [redacted]	24E124 [redacted]	868500000	SF7BW125	-40/11.5	23	673	UpUnc	2025-04-03 10:04:25+08:00	!
24E12 [redacted]	24E124 [redacted]	868300000	SF7BW125	-49/13.8	18	0	JnReq	2025-04-03 10:04:16+08:00	!

Click **Details** to check packet details and decoded results.

Packet Details	
bandwidth	128
SpreadFactor	7
Bitrate	0
CodeRate	4/5
SNR	13.5
RSSI	-54
Power	-
Payload(b64)	AXVjA2fqAARoPA==
Payload(hex)	0175630367ea0004683c
JSON	{ "battery": 99, "humidity": 30, "temperature": 23.4 }
MIC	7f3664cd

4.6.3 Send Data to Device

1. Go to **Network Server > Packets**, check the packet in the network server list to make sure that the device has joined the network successfully.

1122612191	868100000	SF7BW125	-	-	17	0	JnAcc	2019-08-06T09:22:29+08:00	
112261219	868100000	SF7BW125	9.5	-77	18	0	JnReq	2019-08-06T09:22:29+08:00	

2. Fill in the device EUI or select the multicast group which you need to send downlinks. Then fill in the downlink commands, ports.

Send Data To Device				
Device EUI	Type	Payload	Fport	Confirmed
<input type="text" value="11226121913"/>	ASCII	<input type="text" value="15"/>	<input type="text" value="15"/>	<input checked="" type="checkbox"/>

3. Click "Send".



4. Check the packet in the network server list to make sure that the device has received this message successful. It's suggested to enable "Confirmed". Multicast feature does not support confirmed downlinks.

Send Data To Device				
Device EUI	Type	Payload	Fport	Confirmed
<input type="text" value="11226121913"/>	ASCII	<input type="text" value="15"/>	<input type="text" value="15"/>	<input checked="" type="checkbox"/>

You can click "Refresh" to refresh the list or set automatic refreshing frequency for the list.
If the device's class type is Class C, then the device will constantly receive packets.

This packet's type is DnCnf (Downlink Confirmed Packet) and if the packet's color is gray, then it means the packet cannot be transmitted now because at least one message has

been in the queue. If the packet record is white, it means the packet has been delivered successfully.

1122612191311123	869525000	SF12BW125	-	-	6	2	DnCnf	2019-08-06T09:22:55+08:00	Success
1122612191311123	0				6	2	DnCnf		Pending

If the device receives this downlink confirmed packet, then the device will reply "ACK" when delivering next.

Device EUI	Frequency	Datarate	SNR	RSSI	Size	Fcnt	Type	Time	Details
1122612191311123	868300000	SF10BW125	-	-	0	3	DnUnc	2019-08-06T09:23:44+08:00	!
1122612191311123	868300000	SF10BW125	10.5	-75	64	2	UpCnf	2019-08-06T09:23:44+08:00	!
1122612191311123	869525000	SF12BW125	-	-	6	2	DnCnf	2019-08-06T09:22:55+08:00	!
1122612191311123	0				6	2	DnCnf		!
1122612191311123	868500000	SF10BW125	-	-	0	1	DnUnc	2019-08-06T09:22:49+08:00	!

Packets Details

Dev Addr	07e7
GwEUI	24e124ff
AppEUI	557240
DevEUI	1122612191311123
Immediately	-
Timestamp	874346044
Type	UpCnf
Adr	false
AdrAckReq	false
Ack	true
Fcnt	21
Fport	55
Modulation	LORA

Ack is "true" means that the device has received this packet.

If the device's class type is Class A, only after the device sends out an uplink packet will the network server sends out data to the device.

Network Server

Clear

Device EUI	Frequency	Datarate	SNR	RSSI	Size	Fcnt	Type	Time	Details
1122612191311123	868300000	SF10BW125	-	-	0	19	DnUnc	2019-08-06T09:49:38+08:00	!
1122612191311123	868300000	SF10BW125	10.8	-76	64	21	ACK	2019-08-06T09:49:38+08:00	!
1122612191311123	868100000	SF10BW125	-	-	6	18	DnCnf	2019-08-06T09:48:43+08:00	Success
1122612191311123	0				6	18	DnCnf		Pending
1122612191311123	868500000	SF10BW125	-	-	0	17	DnUnc	2019-08-06T09:47:38+08:00	!
1122612191311123	868500000	SF10BW125	8.0	-76	64	19	UpCnf	2019-08-06T09:47:38+08:00	!
1122612191311123	868100000	SF10BW125	-	-	0	16	DnUnc	2019-08-06T09:46:38+08:00	!
1122612191311123	868100000	SF10BW125	11.2	-74	64	18	UpCnf	2019-08-06T09:46:37+08:00	!

Manual Refresh
Refresh

Show the signal-noise ratio.


RSSI
Show the received signal strength indicator.

Size
Show the size of packet.

Fcnt
Show the frame counter.

Type
Show the type of the packet:
 JnAcc - Join Accept Packet
 JnReq - Join Request Packet
 UpUnc - Uplink Unconfirmed Packet
 UpCnf - Uplink Confirmed Packet - ACK response from network requested
 DnUnc - Downlink Unconfirmed Packet
 DnCnf - Downlink Confirmed Packet - ACK response from end-device requested

Time
Show the time of packet was sent

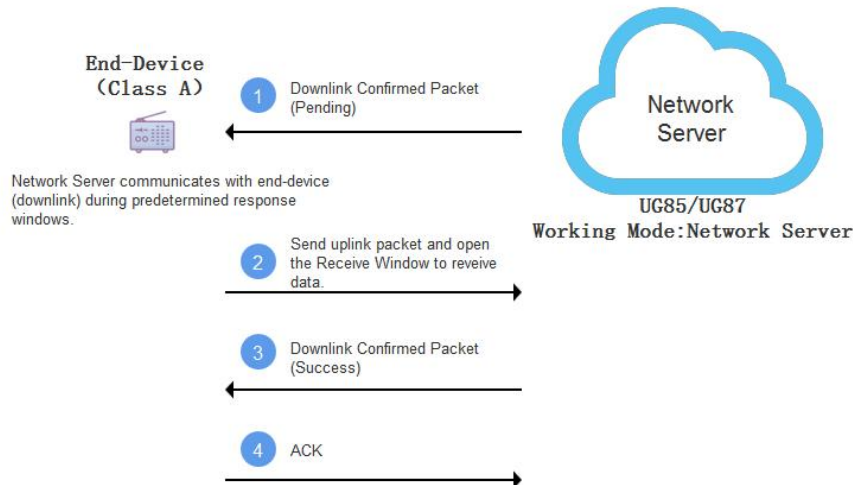

Network Server

Clear

Device EUI	Frequency	Datarate	SNR	RSSI	Size	Fcnt	Type	Time	Details
1122612191311123	868300000	SF10BW125	-	-	0	19	DnUnc	2019-08-06T09:49:38+08:00	!
1122612191311123	868300000	SF10BW125	10.8	-76	64	21	ACK	2019-08-06T09:49:38+08:00	!
1122612191311123	868300000	SF10BW125	10.8	-76	64	20	UpCnf	2019-08-06T09:49:38+08:00	!
1122612191311123	868100000	SF10BW125	-	-	6	18	DnCnf	2019-08-06T09:48:43+08:00	!
1122612191311123	868100000	SF10BW125	9.8	-77	64	20	UpCnf	2019-08-06T09:48:43+08:00	!
1122612191311123	0				6	18	DnCnf		!
1122612191311123	868500000	SF10BW125	-	-	0	17	DnUnc	2019-08-06T09:47:38+08:00	!
1122612191311123	868500000	SF10BW125	8.0	-76	64	19	UpCnf	2019-08-06T09:47:38+08:00	!
1122612191311123	868100000	SF10BW125	-	-	0	16	DnUnc	2019-08-06T09:46:38+08:00	!
1122612191311123	868100000	SF10BW125	11.2	-74	64	18	UpCnf	2019-08-06T09:46:37+08:00	!

Showing 51 to 60 of 355 rows rows per page


means the device has received the packet you send.

Related Topic

[Packets](#)

4.6.4 Connect to HTTP/MQTT Server

The gateway supports choosing the data transport protocol to send data to another server address using MQTT, HTTP or HTTPS protocol.

1. Go to **Network Server > Application** to select the application to edit.
2. Click  to add a data transmission type.

HTTP or HTTPS:

Step 1: select HTTP or HTTPS as transmission protocol.

Type

Step 2: Enter the destination URL. Different types of data can be sent to different URLs.

URL

Data Type	URL
Uplink data	<input type="text"/>
Join notification	<input type="text"/>
ACK notification	<input type="text"/>
Error notification	<input type="text"/>

Enter the header name and header value if there is user credentials when accessing the HTTP(s) server.

HTTP Header

Header Name	Header Value	Operation
<input type="text"/>	<input type="text"/>	<input type="button" value="X"/>
		<input type="button" value="+"/>

MQTT:

Step 1: select the transmission protocol as MQTT and configuration mode as Manual Configuration.

Data Transmission

Type

Configuration Mode

Step 2: Fill in MQTT broker general settings.

General

Broker Address

Broker Port

Client ID

Connection Timeout/s

Keep Alive Interval/s

Data Retransmission

Step 3: Select the authentication method required by the server.

If you select user credentials for authentication, you need to enter the username and password for authentication.

User Credentials

Enable

Username

Password

If certificate is necessary for verification, please select mode and import CA certificate, client certificate and client key file for authentication.

TLS

Enable

Mode

CA File

Client Certificate File

Client Key File

SSL Secure


Step 4: Enter the topic to receive data or send downlinks, and choose the QoS.

Data Type	topic	Retain	QoS
Uplink data	<input type="text"/>	<input type="checkbox"/>	QoS 0
Downlink data	<input type="text"/>	<input type="checkbox"/>	QoS 0
Multicast downlink data	<input type="text"/>	<input type="checkbox"/>	QoS 0
Join notification	<input type="text"/>	<input type="checkbox"/>	QoS 0
ACK notification	<input type="text"/>	<input type="checkbox"/>	QoS 0
Error notification	<input type="text"/>	<input type="checkbox"/>	QoS 0
Request data	<input type="text"/>	<input type="checkbox"/>	QoS 0
Response data	<input type="text"/>	<input type="checkbox"/>	QoS 0

4.7 Node-RED

4.7.1 Start the Node-RED


1. Go to "App > Node-RED" to enable the Node-RED feature.
2. After enabled, click "Launch" to go to the Node-RED web GUI and to log in with the same username and password as gateway.

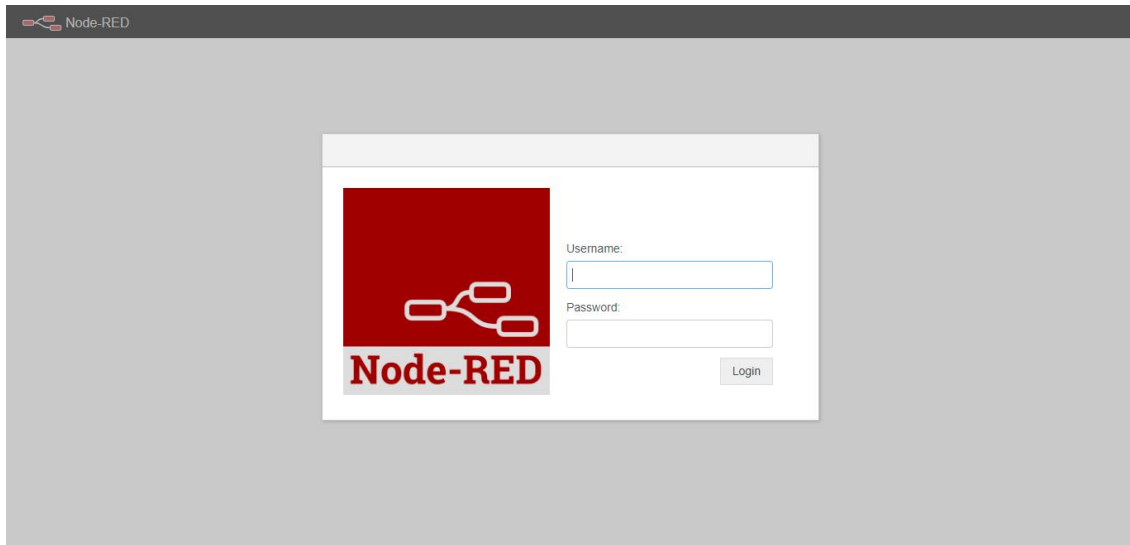

4.7.2 Send Data by Email


Application Example

Send AM102 device data by Email.

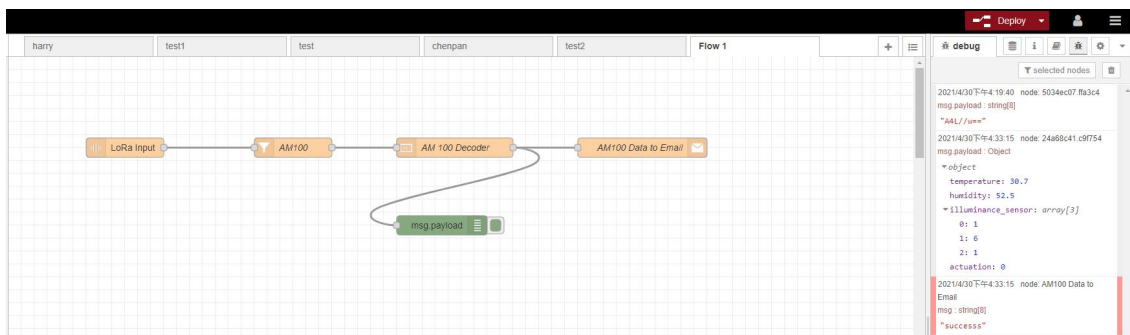


Configuration Steps

1. Add a "LoRa Input" node. Before adding please ensure network server mode is enabled and LoRaWAN devices have joined the network.
2. If you add many devices and only need one device data, add "Device Filter" node behind the "LoRa Input" and type the device EUI.

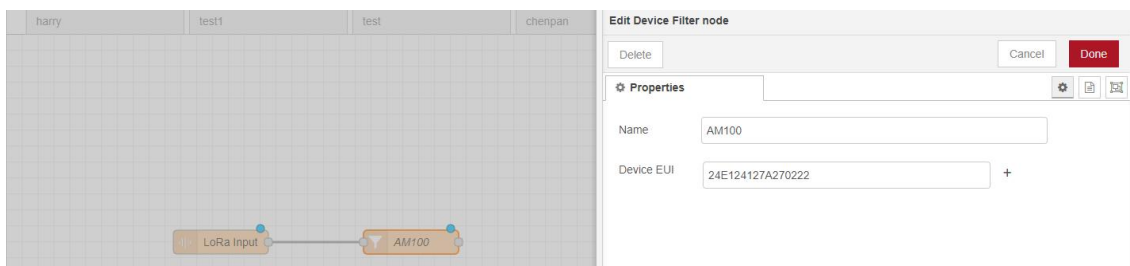

3. Add a "Decoder" node to decode the Milesight sensor data.

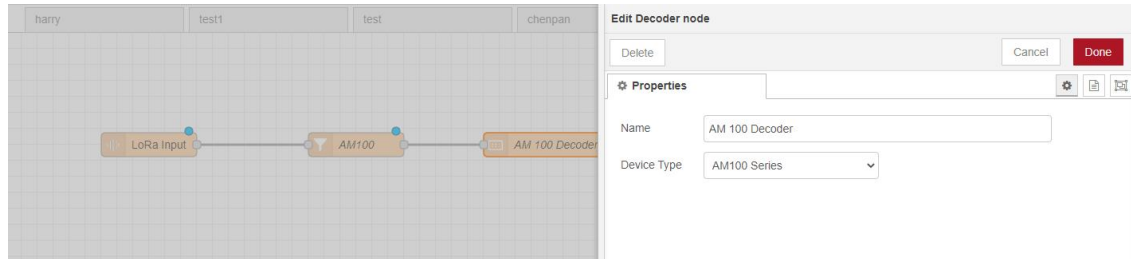


4. Add an "Email Output" and type the SMTP client settings, destination email address and contents. Example content:

The time is {{time}}


Deveui is {{deveui}}

Humidity is {{payload.humidity}}

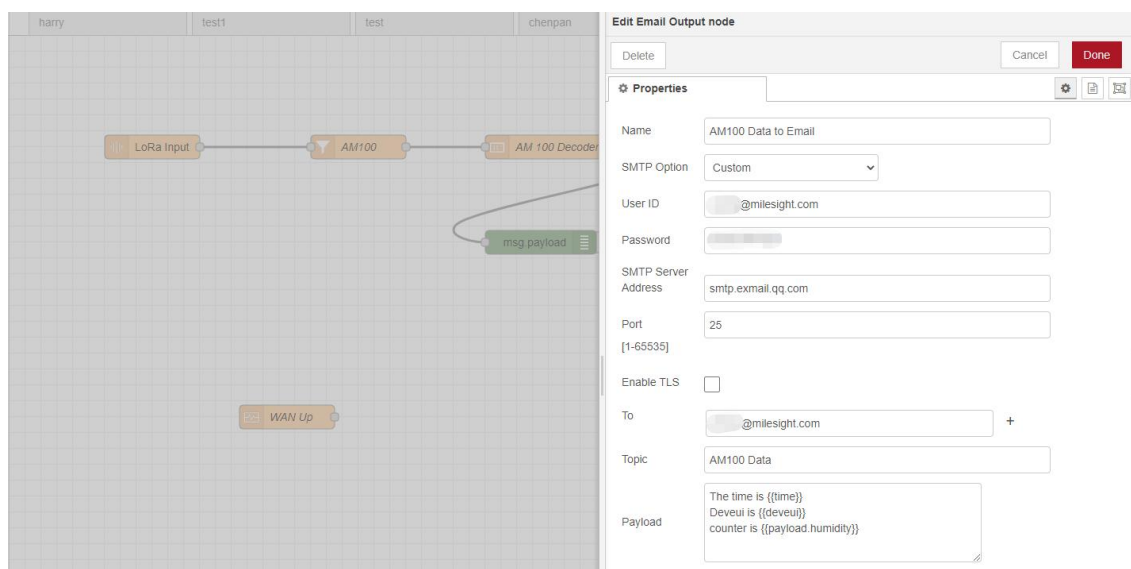

Note:

- 1) When you select SMTP Option as "Same as Gateway", go to "System -> General Settings -> SMTP" to configure the SMTP clients.
- 2) Basic format to call LoRaWAN node data is `{{property name}}`, you can click "Help" page for more info about the Email or SMS payload format.
- 3) If you need to check the output content in every node, please add debug node.
5. After completing the configuration, click "Deploy" to save all your configuration.

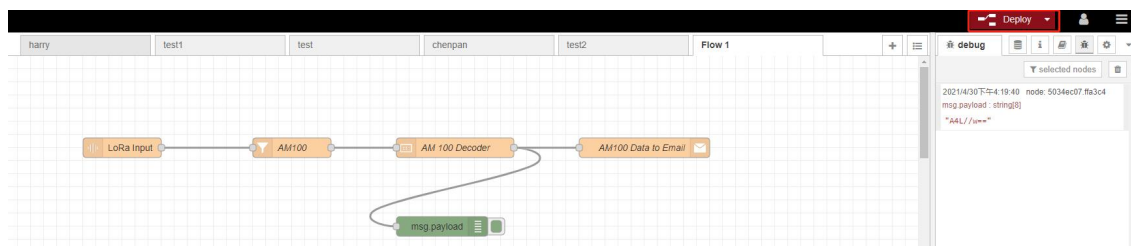

6. When AM102 sends data to gateway, gateway will transfer the data to email.

AM100 Data ★

2021-04

From [redacted]@milesight.com>

To [redacted]@milesight.com>

Time: 2021年4月30日 (周五) 17:13 🕒

Size: 2 KB

The time is 2021-04-30T09:13:13.872942Z Devei is 24e124127a270222 Temperature is 30.4 Humidity is 52

Related Topic[Node-RED](#)**[END]**